

Widely applied in Telecom, Industry, Rental,
Outdoor Projects, Mining, Military, etc.



EP Series WPS1250S

— Generator Set Specification



NO: DT12220028S- 02

© 2010 Power Link Machine (Shanghai) Co., Ltd.

Super Quiet, Superior Life!





3-Phase, 50Hz@1500RPM

	Voltage	kW	kVA	Amps
Prime Power	380	1000	1250	1899.2
	400	1000	1250	1804.3
	415	1000	1250	1739.1
	440	1000	1250	1640.2
Standby Power	380	1111.1	1388.9	2110.3
	400	1111.1	1388.9	2004.7
	415	1111.1	1388.9	1932.3
	440	1111.1	1388.9	1822.5
Noise Level at 7 meters (dBA)			75.6	

Notes:

- 1) Ambient reference conditions: 1,000 mbar, 27°C, 30% relative humidity;
- 2) Standby Power: the maximum power available under varying loads. Only for standby and emergency use. No overload is permissible. Prime Power: the maximum power available under varying loads for continuous operation. A 10% overload is permissible for 1 hour every 12 hours.

Features	Benefits
<ul style="list-style-type: none"> I With all the advantages of soundproofed generators. I Optimal unit protection with minimum size. I Fluid containment design for greater environmental protection. I Sound attenuated to minimize impact on local environment. I Keeps all spillages contained inside enclosure avoiding external site. 	<ul style="list-style-type: none"> I Easy to transport. I Ease of operation. I No need of installation. I Suitable for outdoor use.

Performance Specification and Craftwork

Performance Specification		Telephone Interference, Electromagnetism	
Efficiency of Rated Power	96.3%	TIF	≤50
Time needed from start-up to full load (inductive)	125 seconds	THF	≤2%
Time needed from start-up to 50% load (inductive) allowed	8 seconds	Radio interference in compliance with BS800 and VED LEVELS G and N.	
1.1 times overload operation time (hour)	1	Craftwork <ul style="list-style-type: none"> • Steel base frame with AV mounting • standard 8h fuel tank with flexible rubber fuel tube, fuel level indicator and drainage • Overall sprayed powder coating • Whole set documents, including Installation Manual, Operation Manual, Spare Parts Catalog, Circuit Diagram Criterion <ul style="list-style-type: none"> • ISO3046, ISO8528, BS4999, BS5514, • BS5000PT99、AS1359, IEC34 • UTE5100, VDE0530 • ISO9001:2000 	
2.0 time overload operation time (minute)	1		
Voltage Regulation, steady state	≤±1%		
Voltage Regulation, transient state	20%-15%		
Voltage Settle Time	≤5 seconds		
Voltage Fluctuation Ratio	0.5%		
Frequency Regulation, steady state	±0.5% adjustable		
Frequency Regulation, transient state	±5%		
Frequency Settle Time	5 seconds		
Frequency Fluctuation Ratio	0.5%		
Recovery Time	0.5 seconds		

Engine Specification		Alternator Specification	
Brand	Perkins (UK)	Brand	Leroy Somer
Model	4012-46TWG2A	Model	LSA50.2M6
No. of Cylinders and Cycle	12L, 4 Stroke	Rated Output (Kva)	1250
Induction System	TCA	Ratedcurrent (A)	1804.3
Compression Ratio	13.6: 1	Exciter	Brushless
Displacement (L)	45.8	Thf(Bs En60034- 1)	<2%
Bore X Stroke(Mm)	160 X 190	Bearing Number	Single
Ambient Temp (°C)	25	Windings	100% Copper
Continuous Rated Power (kW)	1253	Connection Type	Star Connection
Speed (rev/min)	1500	Insulation Class	H
Cooling Air Flow (m³/min)	948	Winding Pitch	2/3
Air Intake Flow (m³/min)	102	Amortisseur Winding	Full
Exhaust Gas Flow (m³/min)	180	A.V.R. Model	R448V50
Exhaust Temp (°C)	422	Voltage Regulation (No Load- Full Load)	± 1.0%
Starting System	Electronic	Underspeed Protection	Standard
Battery Voltage/Capacity	24vdc/1600a/1600	Protection	Ip23
Fuel Consumption (L/H)	110% Load	Phase Sequence	A(U), B(V), C(W)
	100% Load	Tif (Nema Mg 1-22)	<50
	75% Load	Excitation System	Self-Excited, Pmg Optional
	50% Load	Ambienttemp (°C)	40
Governor Type	E	Stator Rated Temp (°C)	125

Cooling System		Fuel System	
Total Coolant Capacity		Type Of Injection	Direct Injection
Face Area(Temperate/Tropical) (m²)	2.63-2.967	Fuel Injection Pump	Combined Unit Injector
Rows and Materials	226	Fuel Injector	Combined Unit Injector
Width of Matrix (Temperate/Tropical) (mm)	1600/1805	Nozzle Opening Pressure(MPa)	23.4
Height of Matrix (mm)	1644	Fuel Lift Pump	
Pressure Cap Setting (kPa)	69	Flow/Hour (L/h)	1020
Fan	Diameter(Temperate/Tropical) (mm)	Governor Type	Electronic
		Lubricating System	
Drive Ratio	1:1 / 1:0.9	Lubricating Oil Capacity	
Number of Blades	12	Total System (L)	177
Material	Aluminium	Minimum (L)	136
Type	Engine Driver	Lubricating Oil Pressure	
Coolant		Relief Valve Opens (kPa)	400
Total Capacity (Temperate/Tropical) (L)	123/128	Normal Oil Temp (°C)	95-105

Exhaust System		Electrical System	
Max. Back Pressure (kPa)	5	Alternator (A/V)	40/24
Exhaust Outlet Size (mm)	2 X 254	Starting Motor (kW/V)	16.4/24

Control System

PLC-702

DSE-702 key manual start module is a manual engine control module designed to control the engine via a key switch and push buttons on the front panel. The module is used to start and stop the engine and indicate fault conditions, automatically shutting down the engine and giving a true first up fault condition of an engine failure.

Standard Control Function

- Manual Engine Control Module
- Low Oil Pressure
- High Engine Temperature
- Auxiliary Shutdown
- Overspeed Protection
- Protection hold-off timer
- Charge Failure warning




PLC-5220

DSE-5220 control panel is applied

- I Microprocessor control, with high stability and credibility
- I Mains supply and generator operation monitoring
- I Indicating operation status and fault conditions
- I Multiple protections; multiple parameters display, like pressure, temp.
- I Manual and automatic work mode selectable
- I Real time clock for time and date display, overall runtime display, 99 log entries
- I Overall power output display
- I Integral speed/frequency detecting, telling status of start, rated operation, overspeed
- I Communication with PC via RS485 OR RS232 interface, using MODBUS protocol.



Dimension and Weight

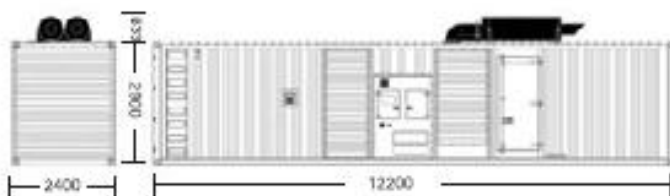

WPS1250S

Length × Width × Height, (mm)	Weight (kg)
12200×2400×2900×633	3900+

Optional

Engine	Alternator	Generator Set	Fuel System	Canopy
<ul style="list-style-type: none"> • Coolant heater 	<ul style="list-style-type: none"> • Space heater • AVR PMG with regulator • Anti-damp and anti-corrosion treatment • Anti-condensation heater 	<ul style="list-style-type: none"> • Tools with the machine 	<ul style="list-style-type: none"> • Low fuel level alarm • Automatic fuel feeding system 	
Lubricating System	Exhaust System	Cooling System	Control Panel	Voltages
<ul style="list-style-type: none"> • Oil with the machine 	<ul style="list-style-type: none"> • Protection board from hotness • Low frequency silencer 	<ul style="list-style-type: none"> • Front heat protection • 50°C radiator • Coolant (-30°C) 	<ul style="list-style-type: none"> • Remote control panel • Automatic paralleling control panel • Automatic Transfer Switch (ATS) 	<ul style="list-style-type: none"> • 415/240V • 400/230V • 380/220V • 220/127V • 200-115V



Air Switch



Paralleling Control System



ATS



Mobile Trailer

Power Link Machine (Shanghai) Co., Ltd.

No. 576, Guanghua Road, Songjiang Science & Technology Park, Shanghai, China

Tel: 086-21- 57858485 Fax: 086-21- 57858750

E-mail: info@powerlinkgenset.com

Specification may change without prior notice.
For more info., please contact Power Link or your local distributors.

Local Distributor