Solar Panel

User Guide


Model: PV420

o ser ourde

Contact Us: www.bluettipower.com service@bluettipower.com



Pullout

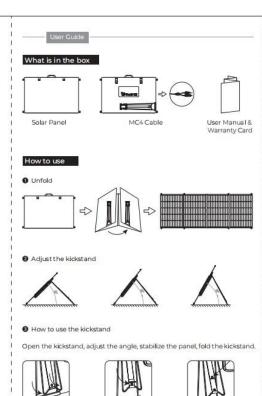

Unbuckle


Buckle up







O Connect to power station



Note:

Whether connected in series or parallel, make sure the total voltage of solar panels is under the power station's input voltage limit.

Attention

Regular inspection and maintenance are required to prolong the lifespan of solar panels.











No shading No scratch

Warning

Do not use solar panels in extreme weather conditions like thunderstorms, floods, typhoons, etc.

Always use solar panels within the specified temperature range (14-149°F/10-65°C).

User Guk

Technical details

		PV420
Rated power		420W
Open circuit voltage		44.3V
Short circuit current		12.2A
Cell efficiency		Up to 23.4%
Cell lamination		ETFE
Cell type		Monocrystalline silicon
Operating temperature		14-149°F/-10-65°C
	3	General
Weight		30.8lbs / 14Kg
Dimensions	Unfolded	105.3*38.3in / 2675*975mm
	Folded	38.3*25.9*1.7in/975*660*45mm
		Warranty
	1	12 Months

Frequently asked questions

Is the solar panel waterproof?

No. The solar panel is IP65 water-resistant that provides protection against water splash. Please do not leave it in the rain or water for a long time.

What will affect the final conversion efficiency of solar panels?

The actual solar panel efficiency may be affected by several factors, like weather, weather, sun intensity, shading, panel orientation, temperature, location, and and dust and dirt. For example, if you live in a place without much sunlight or your panels are covered by shade, you'll get a very low output or none at all.

Is the BLUETTI's solar panel compatible with the third party's power station?

Yes. Make sure BLUETTI solar panels' voltage is compatible with your power stations' voltage limit, while you're using the same connector. Please feel free to contact us for compatibility with other power stations.

