

# RSP115DT

## Bifacial 115W Monocrystalline Solar Panel

### Key Features

The Renogy Bifacial 115W Solar Panel features a sleek and durable frame design. This solar panel uses high-efficiency (Bifacial) monocrystalline silicon solar cells and frame corner supports for outdoor protection.

- High module conversion efficiency
- Top ranked PTC rating
- Quick and inexpensive mounting
- 100% EL testing on all Renogy modules
- No hot spots guaranteed

### Potential Uses

Renogy Bifacial 115 watt Solar Panels have applications in residential solar power arrays, water pumping systems, signaling systems, and plenty of other applications. The Renogy 115 Watt solar panel offers a feasible off-grid renewable energy solution for rooftop, RV, boat, and outdoor power systems.



Power Output Warranty



Material and Workmanship Warranty

# RSP115DT

## Bifacial 115W Monocrystalline Solar Panel

### Electrical Data

Maximum Power at STC*	115 W
Optimum Operating Voltage ( $V_{mp}$ )	18.8 V
Optimum Operating Current ( $I_{mp}$ )	6.12 A
Open Circuit Voltage ( $V_{oc}$ )	21.9 V
Short Circuit Voltage ( $I_{sc}$ )	6.70 A
Module Efficiency	18.6 %
Maximum System Voltage	1000 VDC UL
Maximum Series Fuse Rating	15 A


### Thermal Characteristics

Operating Temp. Range	-40°C - 85°C (-40°F - 185°F)
Nominal Operating Cell Temperature (NOCT)	47±2°C
Temperature Coefficient of Pmax	-0.38%/°C
Temperature Coefficient of Voc	-0.28%/°C
Temperature Coefficient of Isc	0.06%/°C

### Junction Box

IP Rating	IP 68
Diode Type	MD2045S/MD3045S
Number of Diodes	2 Diode(s)
Output Cables	12 AWG 600mm (23.6 in)

### Module Diagram

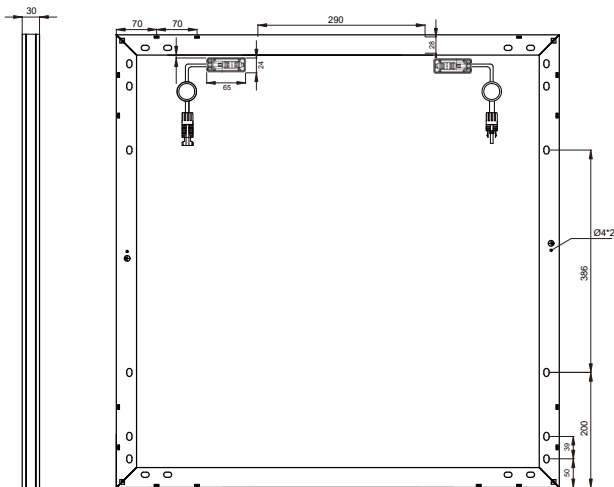


### Mechanical Data

Solar Cell Type	Monocrystalline (7.2 x 3.6 in)
Number of Cells	32 (4 x 8)
Dimensions	786x763x30mm(30.9x30.0x1.2in)
Weight	6.9 kg (15.2lbs)
Front Glass	Tempered Glass 0.13 in (3.2 mm)
Frame	Anodized Aluminium Alloy
Connectors	Solar Connectors
Fire Performance	Type 1

### MC4 Connectors


Rated Current	20A
Maximum Voltage	1500V DC
Maximum AWG Size Range	12 AWG
Temperature Range	-40°C - 85°C (-40°F - 185°F)
IP Rating	IP 68

### Certifications



ISO 9001:  
Quality Management System

### IV-Curve

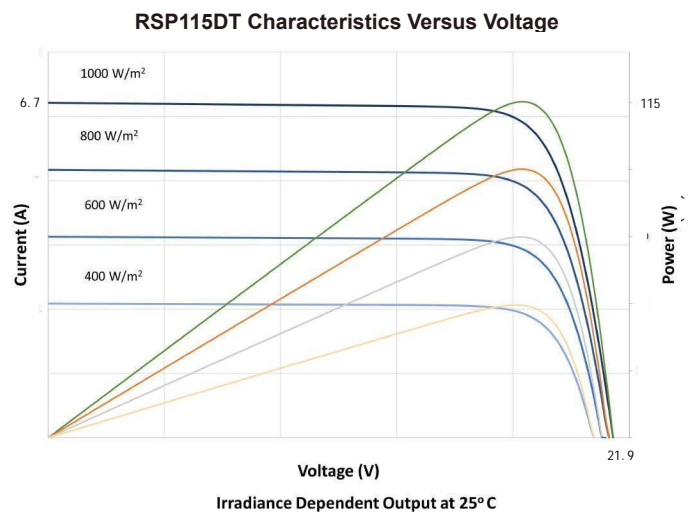

\*All specifications and data described in this data sheet are tested under Standard Test Conditions (STC - Irradiance: 1000W/m<sup>2</sup>, Temperature: 25°C, Air Mass: 1.5) and may deviate marginally from actual values. Renogy and any of its affiliates has reserved the right to make any modifications to the information on this data sheet without notice. It is our goal to supply our customers with the most recent information regarding our products. These data sheets can be found in the downloads section of our website, [www.renogy.com](http://www.renogy.com)