
Nissan Navara D23 MY21 – T7D788



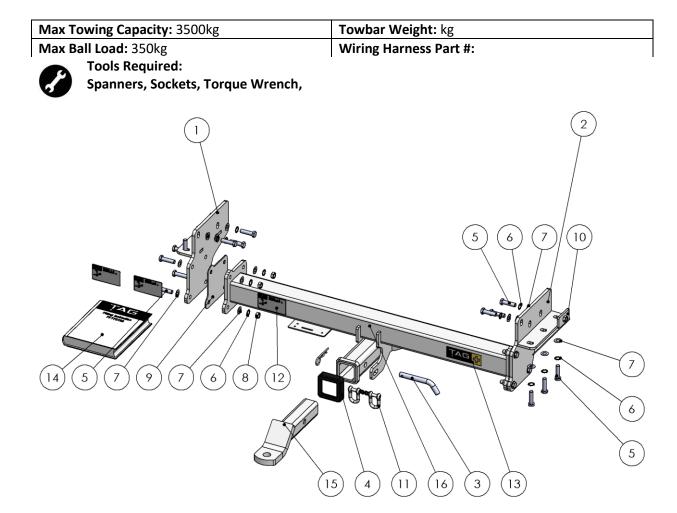

ITEM NO.	PartNo	DESCRIPTION	QTY.	ITEM NO.	PartNo	DESCRIPTION	QTY.
1	788-02	End Plate Subassembly PS T7D788	1	9	788-07	Main Bar End Plate Spacer 3mm	2
2	788-02DS	End Plate Subassembly DS T7D788	1	10	788-06	000-77 Plate w/ wire & M12x1.25 nut	1
3	UNT080	Class 4 Pin & Clip	1	11	DSG010	TAG D-Shackle - 10mm, 1000kg, Galvanised	2
4	UNTCOV	Cover Hitch Receiver Collar TAG	1	12	LAB001	TAG Compliance plate	3
5	BM12451.25PSBO	M12x1.25x45 Bolt	20	13	LAB004	TAG + Foil Sticker 123x38	1
6	BM12SPWO	M12 Shakeproof Washer	20	14	FI-T7D788	Fitting Instruction	1
7	BM12FW	M12 Flat Washer Zinc Clear	28	15	L4045	L4045 Ball Mount	1
8	BM121.25PN	M12x1.25 Nut	8	16	TB-T7D788	Main Bar Subassembly T7D788	1

Nissan Navara D23 MY21 – T7D788

Warning:

- This product is for towing purposes only and must only be loaded as shown in your vehicle Owners Manual.
- This towbar is NOT to be drilled, cut, welded or modified in any way.
- Check behind chassis rail and body panels before drilling to ensure no hazards are present


General:

- Before fitting this towbar read fitting instructions and check installation hardware is correct.
- Check that the towbar is suitable for the vehicle and be wary of any changes to the vehicle design that may conflict with the fitting of this towbar.
- After drilling, blow any filings clear, remove any swarf and treat exposed metal with a rust inhibitor.
- If this vehicle requires a bumper cut out, please check to make sure that you measure twice and check twice before cutting any panels as some bumper profiles can change. If you are not sure, then please ask your towbar supplier

2


Nissan Navara D23 MY21 – T7D788



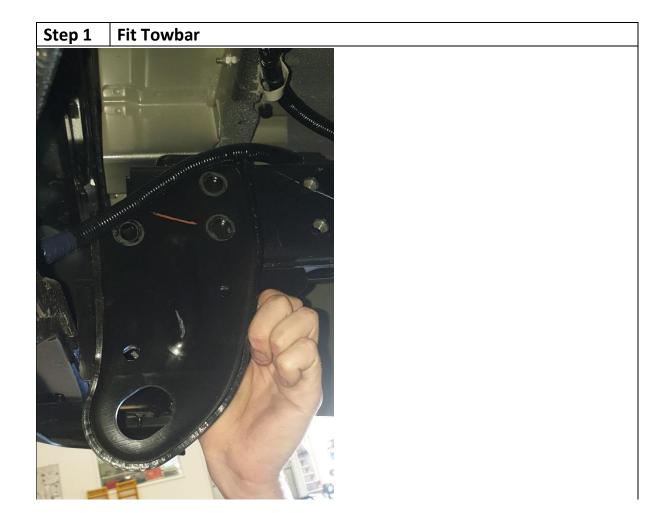

Nissan Navara D23 MY21 – T7D788



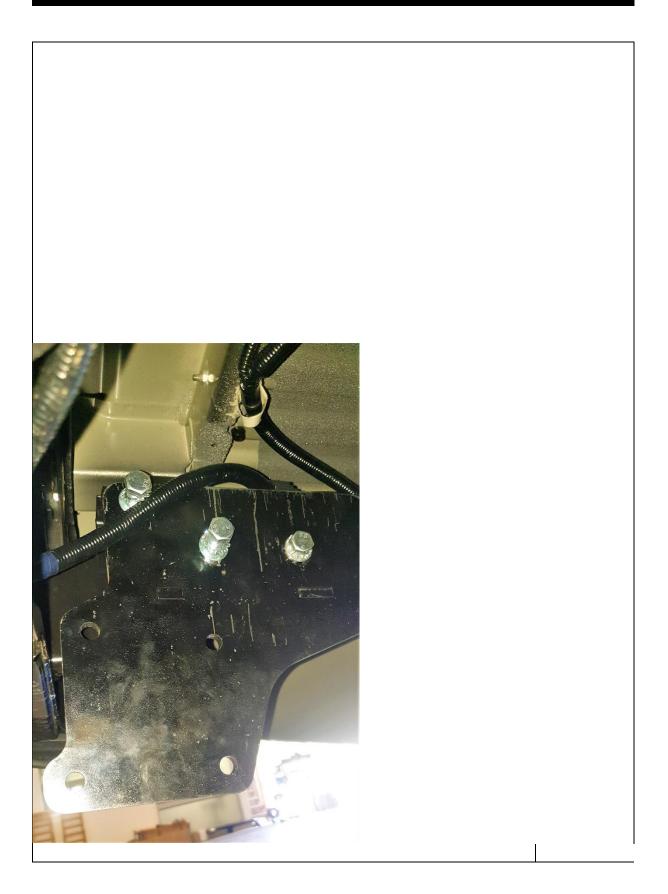

Rev 1

Nissan Navara D23 MY21 – T7D788



Instructions	Tools	Torque Spec
 a. Remove & discard shipping hook and bolts from PS chassis. b. Loosely fasten PS endplate to the chassis with 6x M12x 45 bolts & washers. Repeat on DS. c. Lift main bar up to end plates and insert 8x M12x 40 bolts, washers & nuts. i. If there is more than approx. 3mm clearance between the parts on each side, then spacers will be required. ii. If the clearance is less than this, spacers will not be required between the parts. iii. When all hardware is in place, tighten bolts in chassis followed by the main bar bolts. 	Spanners & Sockets	

Rev 1

Nissan Navara D23 MY21 – T7D788



Step 2	Apply compliance Label						
Instruct		Tools	Torque Spec				
а.	Apply one of the compliance labels to the pillar of the driver's door. Leave the remaining label & the fitting instructions in the vehicle handbook.						

Nissan Navara D23 MY21 – T7D788





WARRANTY STATEMENT

The manufacturer of TAG branded products, warrants your TAG Towbar for its full product life under the following conditions:

- You can show proof of purchase.
- The towbar has been correctly installed by a suitably qualified installer.
- The towbar has not been modified or abused in any way and has only been used for the purpose intended.
- The towbar was not fitted second hand to your vehicle.

The extent of this warranty includes materials and workmanship used in the manufacture of the towbar and is to the equivalent value of current, full replacement cost.

Nothing stated or implied in this warranty limits in any way, the statutory rights that you may have.

To make a claim visit the original installer in the first instance or, if you are unable to or are not satisfied with their help, then contact us directly by email at warranty@tagtowing.com