LIGHTING THE FUTURE

GREAT WHITES Liphting Foresight

GREAT WHITES DIRECT REPLACEMENT LED HIGH/LOW HEADLIGHT INSERT WITH PARK LIGHT

9-32V

1.3kg

90mm / 3.54in

SEALED BEAM HIGH/LOW HEADLIGHT INSERT WITH PARK LIGHT

Effective Lumens:	
Raw Lumens:	
Amperage:	

Input Voltage: 2070 3835 Weight: Overall Height: 176.8mm / 6.96in 4.5A Depth:

LED Type: High Beam: CREE XML x 2 Low Beam: Philips Altilon C2 x 1 Philips Altilon C4 x 1 Park Light: Philips Luxeon 3014 x 30

Part No. GWF5005

WHITER & BRIGHTER

Greater volume of effective light output delivering a better light form on the road ahead.

REDUCING EYE STRAIN

The colour spectrum of LED is closer to that of sunlight which reduces eve strain. LEDs spread a crisp light ahead of the vehicle, enabling excellent peripheral vision.

LONGEVITY

50.000+ hour operating life

INSTANT ON No warm up period

WATERPROOF Up to 3m (IP69K rated)

SHOCKPROOF & VIBRATION DAMPENED Rated to 21Grms

RF RATED

CISPR 25, Class 3 Rated to ensure that they don't introduce RF noise into electronics/radios, enabling unrestricted critical communication.



BUILT TO LAST

Polycarbonate lens and tough alloy composite housing (Corrosion Resistant).

5 YEAR WARBANTY

Conditions apply, see our website for more information.

EASY FITMENT Suits OE Headlight Housing

INTEGRATED ELECTRONIC THERMAL MANAGEMENT

(ETM) to regulate heat levels to prolong the lifespan of the LED by engaging PWM.

PULSE WIDTH MODULATION

(PWM) integrated circuitry flashes the LED faster than the human eye can see for reduced heat and prolonged LED life.



GREAT WHITES DAYTIME RUNNING LIGHTS

4 LED 12-24V DAYTIME RUNNING LIGHT KIT

Effective Lumens:247Raw Lumens:380LED Type:Philips Luxeon-C LEDAmperage:0.5A @12VWattage:6W

247 Input Voltage: 380 Weight: LED Length: 12V Height: 6W Depth: 10-30VDC 0.22kg each 126.6mm / 4.98in 24.4mm / 0.96in 54mm / 2.12in



Part No. GWF1023



- · Suits both positive and negative switching vehicles.
- 8 x quality Philips LEDs (4 in each light).
- 2 DRL's per kit.
- Ready to install bracket.
- Includes complete wiring harness.
- Automatic dimming when park lights are turned on.
- 50,000 + hour operating life.
- Instant on. No warm up period.
- Can be mounted horizontally only.
- Waterproof Up to 3m (IP69K rated).
- Shockproof & Vibration Dampened rated to 21Grms.
- CISPR 25, Class 1 Rated to ensure that they don't introduce RF noise into electronics/radios, enabling clearer communication.
- 5 Year Warranty. Conditions apply, see our website for more information.





GREAT WHITES DRIVING LIGHTS FEATURES & BENEFITS

WHITER & BRIGHTER

Greater volume of effective light output delivering a better light form on the road ahead.

REDUCING EYE STRAIN

The colour spectrum of LED is closer to that of sunlight which reduces eye strain. LEDs spread a crisp light ahead of the vehicle, enabling excellent peripheral vision.

LONGEVITY

The 50,000+ hour operating life of an LED Driving Light is a more cost effective option than the 2,500 hour life of an HID driving light.

INSTANT ON No warm up period

WATERPROOF Gen2: IP69K | Gen1: IP68

SHOCKPROOF & VIBRATION DAMPENED Gen2: Rated to 21Grms | Gen1: Rated to 15.6Grms

RF RATED

Gen2 Great Whites are CISPR 25, Class 3 Rated to ensure that they don't introduce RF noise into electronics/radios, enabling unrestricted communication.

BUILT TO LAST

Polycarbonate lens and tough alloy composite housing (Corrosion Resistant).

SECURING YOUR INVESTMENT

Features unique added security bolts to reduce the likelihood of theft (Excludes Twin Bar and 9 LED Low Mount Bar).

5 YEAR WARRANTY

Conditions apply, see our website for more information.

LATEST LED TECHNOLOGY

Cutting edge LED technology delivers both distance and spread of light in every individual LED to create the combination lights. The single LED lights have been specifically designed for applications requiring distance and not spread.

.....

CREAT WHITES

PULSE WIDTH MODULATION

(PWM) integrated circuitry flashes the LED faster than the human eye can see for reduced heat and prolonged LED life.

INTEGRATED ELECTRONIC THERMAL MANAGEMENT (ETM) to regulate heat levels to prolong the lifespan of the LED by engaging PWM.

CHANNELLED HEAT SINK

Designed for superior heat dissipation to prolong the lifespan of the LEDs.

ALL GREAT WHITES BARS BOAST EXTRUDED 6061 ALUMINIUM HOUSING For ultimate durability and protection

ENVIRONMENTALLY SEALED FLY LEAD WITH DEUTSCH CONNECTORS

220 LONG DISTANCE ROUND DRIVING LIGHT

Effective Lumens: Raw Lumens: LED Type: Lur Amperage: Wattage:

ns: 2783 Input Voltage: 5961 Weight: Luminus CBT-140 Height: 7.9A @12V Length: 94.8 Depth: 9-32VDC 4.75kg 243mm / 9.56in 240mm / 9.44in 220mm / 8.66in

1510

Part No. GWR100013



220 24 LED ROUND DRIVING LIGHT

Effective Lumens: Raw Lumens: LED Type: Amperage: Wattage:
 10386
 Input Voltage:

 13440
 Weight:

 Cree XP-G2
 Height:

 11.04 @12V
 Length:

 132.48W
 Depth:

9-32VDC 6.55kg 243mm / 9.56in 240mm / 9.44in 220mm / 8.66in

Part No. GWR5243





170 LONG DISTANCE ROUND DRIVING LIGHT

Effective Lumens:		
Raw Lumens:		
LED Type:	Luminus CE	
Amperage:	5.48A @	
Wattage:	65	

1672 **Input Voltage:** 3693 Weight: BT-90 Heiaht: @12V Length: .76W Depth:

9-32VDC 2.66kg 190mm / 7.48in 187.5mm / 7.38in 136mm / 5.35in

Part No. GWR60013



170 18 LED ROUND DRIVING LIGHT

Effective Lumens: **Raw Lumens:** LED Type: Amperage: Wattage:

7034 **Input Voltage:** 10080 Weight: Cree XP-G2 Height: 8.24A @12V Length: 98.88W Depth:

9-32VDC 3.51kg 190mm / 7.48in 187.5mm / 7.38in 136mm / 5.35in



V1510

Part No. GWR5183






18 LED 4X4 WIDE ANGLE ROUND DRIVING LIGHT

Effective Lumens:	6,375	Input Voltage:	9-32VDC
Raw Lumens:	8,874	Weight:	2.8kg
LED Type:	5W Cree XPG	Height:	183mm / 7.20in
Amperage:	6.25 @ 12V	Length:	170mm / 6.69in
Wattage:	75W	Depth:	114mm / 4.48in

The Great Whites 4X4 Wide Angle offers a greater spread of light for serious off-road action. The elliptical beam pattern produces an oval beam pattern with a wider amount of light covering a medium distance. Part No. GWR5182



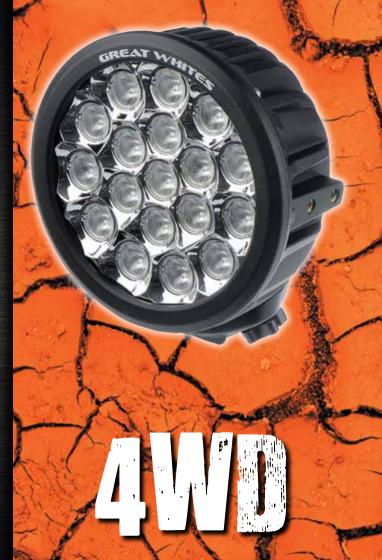



170 12 LED ROUND DRIVING LIGHT

Effective Lumens: **Raw Lumens:** LED Type: Amperage: Wattage:

4883 **Input Voltage:** 6720 Weight: Cree XP-G2 Height: 5.58A @12V Length: 66.96W Depth:

9-32VDC 3.51kg 190mm / 7.48in 187.5mm / 7.38in 136mm / 5.35in

Part No. GWR5123



170 9 LED ROUND DRIVING LIGHT

Effective Lumens: **Raw Lumens:** LED Type: Amperage: Wattage:

Part No. GWR5093

GEN2

3840 **Input Voltage:** 5040 Weight: Cree XP-G2 Height: 4.18A @12V Length: 50.16W Depth:

9-32VDC 3.51kg 190mm / 7.48in 187.5mm / 7.38in 136mm / 5.35in





120 LONG DISTANCE ROUND DRIVING LIGHT

Effective Lumen	s: 1363	Input Voltage:	9-32VD
Raw Lumens:	2725	Weight:	1.03k
LED Type:	Luminus SST-90	Height:	126mm / 4.96i
Amperage:	2.22A @12V	Length:	137mm / 5.39i
Wattage:	26.64W	Depth:	94mm / 3.70i

Part No. GWR30013



120 7 LED ROUND DRIVING LIGHT

Effective Lumens: Raw Lumens: LED Type: Amperage: Wattage:

Part No. GWR5073

GEN2

2688 Input Voltage: 3920 Weight: Cree XP-G2 Height: 2.8A @12V Length: 33.6W Depth: 9-32VDC 1.3kg 126mm / 4.96in 137mm / 5.39in 94mm / 3.70in

)C <g

in in in



* 1 S I D



90 BULL BAR HALO LIGHT

Effective Lumens: **Raw Lumens:** LED Type: Amperage: Wattage:

688 1052 Cree XML-2 0.7A @12V 8.4W

Weight:

Height:

Depth:

Diameter:

Input Voltage: 9-32VDC 0.69KG 95mm / 3.74in 95mm / 3.74in 110mm / 4.33in

GREAT

PE MHILE

Part No. GWR10013





24 LED TWIN BAR DRIVING LIGHT

Effective Lumens:	9363	Input Voltage:	9-32VDC
Raw Lumens:	13440	Weight:	3.92kg
LED Type:	Cree XP-G2	Length:	985mm / 38.77in
Amperage:	10.72A @12V	Height:	65mm / 2.55in
Wattage:	128.64W	Depth:	62mm / 2.44in

Part No. GWT5243

Great Whites logo illuminates separately delivering greater impact. Visit our website for more information.

18 LED BAR Driving Light

Effective Lumens:	6824	Input Voltage:	9-32VDC
Raw Lumens:	10080	Weight:	3.11kg
LED Type:	Cree XP-G2	Length:	622mm / 24.48in
Amperage:	7.74A @12V	Height:	75mm / 2.95in
Wattage:	92.88W	Depth:	62mm / 2.44in

Part No. GWB5183









12 LED BAR Driving Light

tive Lumens:	4623	Input Voltage:
Lumens:	6720	Weight:
Туре:	Cree XP-G2	Length:
erage:	5.14A @12V	Height:
age:	61.68W	Depth:

9-32VDC 2.2kg 426mm / 16.77in 75mm / 2.95in 62mm / 2.44in



Part No. GWB5123

Effec

Raw

LED

Amp

Watt

9 LED BAR DRIVING LIGHT

Effective Lumens: Raw Lumens: LED Type: Amperage: Wattage:

 Amperage:
 3.88A @12V

 Wattage:
 46.56W

 Part No. GWB5093

3431Input Voltage:5040Weight:Cree XP-G2Length:.88A @12VHeight:46.56WDepth:

9-32VDC 1.75kg 353mm / 13.89in 75mm / 2.95in 62mm / 2.44in



9 LED LOW MOUNT BAR DRIVING LIGHT

Effective Lumens:	3431	Input Voltage:	9-32VDC	
Raw Lumens:	5040	Weight:	1.26kg	
LED Type:	Cree XP-G2	Length:	313mm / 12.32in	
Amperage:	3.88A @12V	Height:	65mm / 2.55in	
Wattage:	46.56W	Depth:	62mm / 2.44in	
Part No. GWB5093LM				

N868866666



6 2 2





18 LED CHROME BAR DRIVING LIGHT

Effective Lumens:	6,375	Input Voltage:	9-32VDC
Raw Lumens:	8,874	Weight:	3.26kg
LED Type:	5W Cree XPG	Length:	640mm / 25.19in
Amperage:	6.25 @ 12V	Height: 60mm	(+Bracket) / 2.36in
Wattage:	75W	Depth:	79mm / 3.11in

Part No. GWB5181CHROME

12 LED CHROME BAR Driving light

Effective Lumens:	4,250	Input Voltage:	9-32VDC
Raw Lumens:	5,916	Weight:	2.36kg
LED Type:	5W Cree XPG	Length:	148mm / 17.63in
Amperage:	4.16 @ 12V	Height: 60mm (+Bracket) / 2.36in
Wattage:	50W	Depth:	79mm / 3.11in

Part No. GWB5121CHROME

18 LED CHROME ROUND Driving light

Effective Lumens:	6,375	Input Voltage:	9-32VDC	
Raw Lumens:	8,874	Weight:	2.8kg	
LED Type:	5W Cree XPG	Height:	183mm / 7.2in	
Amperage:	6.25 @ 12V	Length:	170mm / 6.69in	
Wattage:	75W	Depth:	114mm / 4.48in	
Part No. GWR5181CHROME				

[<u>66666666666666666</u>]







36 LED DUAL BAR DRIVING LIGHT



Effective Lumens: Raw Lumens: LED Type: Amperage: Wattage:

Part No. GWD5363

12970 Input Voltage: 20160 Weight: Cree XP-G2 Length: 13.96A @12V Height: 167.52W Depth: 9-32VDC 4.71kg 570mm / 22.44in 105mm / 4.13in 85mm / 3.34in



24 LED DUAL BAR DRIVING LIGHT Effective Lumens: 9144 Input Voltage:

Effective Lumens: Raw Lumens: LED Type: Amperage: Wattage:

Part No. GWD5243

9144 13440 Cree XP-G2 9.52A @12V 114W

Weight:

Length:

Heiaht:

Depth:

9-32VDC 3.33kg 410mm / 16.14in 105mm / 4.13in 85mm / 3.34in





18 LED DUAL BAR DRIVING LIGHT

Effective Lumens:	7091	Input Voltage:	9-32VDC
Raw Lumens:	10080	Weight:	2.71KG
LED Type:	Cree XP-G2	Length:	330mm / 12.99in
Amperage:	7.34A @12V	Height:	105mm / 4.13in
Wattage:	88.08W	Depth:	85mm / 3.34in
Part No. GWD5183			



C



ILLUMINATED ROCKER SWITCH

On/Off Rocker Switch, Blue Illumination. To suit 12V and 24V applications. 20amp rating @ 12V. GWA0014

WIRING HARNESS

Automatically detects positive or negative switching headlight systems. Plug and play H4 adaptor plugs that can be removed to suit other headlight connector types. Kit contains switch, pre-wired relay holder, fuse holder with 20A fuse, positive/negative circuit built into harness and detailed fitting instructions. Harness cable length suitable for most passenger vehicles, 4X4s, 12V trucks and 24V vehicles.

12 Volt - Part No. GWA0007 24 Volt - Part No. GWA0008

10MM, 8MM & 6MM LOCK NUTS

Reduce the risk of having your driving lights stolen! These nuts and bolts feature special security heads requiring a special keyed socket to remove. Each kit contains two nuts and one installation device.

10mm - Part No. GWA0002 8mm - Part No. GWA0009 To suit 120 and 170 Round LED Driving Lights To suit 90 Bull Bar and all Bar LED Driving Lights excluding 9 LED Low Mount (Part No. GWB5093LM) To suit 9 LED Low Mount (Part No. GWB5093LM)

ANGLE BRACKET

- Part No. GWA0010

To suit Great Whites Bar LED Driving Lights. Excludes 9 LED Low Mount (Part No. GWB5093LM) and LED Twin Bar (Part No. GWT5243)

GWA0011

6mm

DRIVING LIGHT NUMBER PLATE MOUNTING BRACKET

Designed to suit Great Whites 9 LED Low Mount Bar Lights. Add lighting without unnecessary hardware.

Specifications & Dimensions

- 5mm Aluminium construction
- Black powder coat finish
- Holds any 9 or 12 LED Great Whites Bar

Added Features

- Installs behind number plate.
- Easy no drill installation.
- Suitable for both cars and 4X4s.
- · Features multiple fixing points.
- Designed to fit slimline and regular number plates.

Length: 367mm / 14.44in Height: 119mm / 4.68in Depth: 48mm / 1.88in

Part No. GWA0001

POLYCARBONATE LENS COVERS

To suit all Great Whites 170 Round LED Driving Lights. Shatterproof Polycarbonate protects from rock and debris impact. Fully gasketed for added dust and water protection.





OUTSHINE, OUTLAST, OUTPLAY.



greatwhites.com.au // greatwhites.co.nz





