



JETWAVE®

HIGH PRESSURE CLEANERS

Distributed by:

HORNET™ 251 3600 psi • 15 l/pm



Petrol Driven



Cold Water



Heavy Duty Usage

FIELDS OF APPLICATION

- Roof Cleaning
- Painting Contractors
- Cleaning Contractors
- Boat Yards and Ports
- Agricultural Equipment
- Car and Equipment Yards



The Jetwave® Hornet™ 251 is a true heavy duty professional cold water petrol powered by HONDA™ pressure washer that has stood the test of time. Australian engineered and assembled using only the best quality Italian and global components.



HERO INNOVATIONS



Optimise

4 x anti-vibration protection for quieter performance.



Durable

Foam filled 14" puncture proof tyres.

STANDOUT FEATURES



Professional Italian triplex Interpump delivers performance and longer life.



World class easy start HONDA™ GX390 Industrial Series OHV Engine.



Dual M22 screw hose coupling system.



Jetwave Safety System™ (JSS) thermal valve to prevent overheating in excessive bypass and over pressurisation.



Brass washable inlet water filter.



Integrated accessory storage for hose, gun and lance.



Low speed professional pump for increased reliability and longer maintenance intervals.



Professional line accessories.




Quality pressure gauge.



Jetwave Group
 72-74 Richmond Road
 Keswick | Adelaide
 South Australia | 5035 | AU
 +61 8 8371 3599
 sales@jetwave.com.au
 jetwave.com.au

STANDARD EQUIPMENT

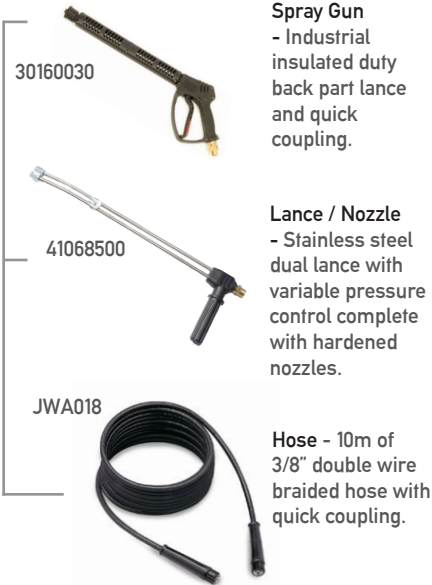

Spray Gun
 - Industrial insulated duty back part lance and quick coupling.

Lance / Nozzle
 - Stainless steel dual lance with variable pressure control complete with hardened nozzles.

Hose - 10m of 3/8" double wire braided hose with quick coupling.

OPTIONAL ACCESSORIES

| Item | p/n | Code |
|--|-----|-----------|
| 1. Complete Turbo Head with Lance | p/n | JWA158 |
| 2. Additional High Pressure Hose (per metre) | p/n | 52001 |
| 3. High Pressure Swivel | p/n | 26105000 |
| 4. LS3-1 Foaming Lance with Tank | p/n | JWA221 |
| 5. High Pressure Hose Reel (cap 30m) | p/n | 1060CMPL |
| 6. Hammerhead™ Whirlaway 20" ABS | p/n | DCFSCP20 |
| 7. Hammerhead™ Whirlaway 22" Stainless Steel | p/n | DCFSCS22Z |
| 8. Engine Hour Meter | p/n | 19598 |
| 9. Giraffe™ Telescopic Lance | p/n | DCLT624A4 |
| 10. Sandblasting Kit | p/n | JWA164 |
| 11. Sludge Kit | p/n | 80005 |
| 12. Drain Kit | p/n | HOP3X20 |

Also available with:
 • iGX390 Electric Start Engine



POWERED by
HONDA

The manufacturer reserves the right to modify design features and technical facts without notice; due to our principals of continuous improvement.

V1.0 8/2017



| Product Code | p/n | HP251-15P |
|--------------|-----|-----------|
|--------------|-----|-----------|

TECHNICAL DATA

| | | |
|----------------------|-----------|------------|
| Working Pressure | psi / bar | 3600 / 250 |
| Flow Rate | l/pm | 15 |
| Max Water Inlet Temp | °c / °f | 60 / 140 |

INTENDED APPLICATION

| | | |
|---------------------------|--------------|------------------------|
| Usage Frequency | hours / type | 4 - 8 daily / Constant |
| Category of Dirt / Debris | type | Medium |

MOTOR FEATURES

| | | |
|------------------|---------|-------------------------------------|
| Engine | type | HONDA™ GX390 (4 stroke, air cooled) |
| Power | hp / cc | 13 / 390 |
| Fuel Supply | type | Unleaded |
| Fuel Capacity | litres | 6.1 |
| Low Oil Shutdown | y / n | Y |
| Starting System | type | Recoil / Pull |

HYDRAULIC FEATURES

| | | |
|-----------------------|-------|---|
| Pump / Head / Pistons | type | Interpump Plunger Triplex / Brass / Ceramic |
| Motor Pump Coupling | type | Gearbox Drive |
| Pump Speed | rpm | 1450 |
| Unloader Valve | type | Independent (zero) |
| Safety Valve | y / n | Y |
| Orifice / Nozzle | size | 040 |

OTHER FEATURES

| | | |
|--------------------------------|-------|---|
| Electric / Key Start Available | y / n | Y (p/n: HP251-15PE) |
| Adjustable Pressure | y / n | Y |
| Hose Reel Provision | y / n | Y |
| Frame Structure | type | Welded hot dipped galvanised 4 wheel roll |
| Onboard Accessory Storage | y / n | Y |
| Detergent Injector | y / n | Y - Downstream low pressure adjustable |

DIMENSIONS & WEIGHT

| | | |
|-------------------|--------------|---------------------------|
| Approx Weight | kg | 80 unit / 84 boxed |
| Unit Dimensions | mm | 1110(L) x 700(W) x 860(H) |
| Boxed Dimensions | mm | 970(L) x 600(W) x 670(H) |
| Number per Pallet | type: pieces | AS: 2 / Euro: 1 |

WARRANTY(S)

| | | |
|----------------------------|-------|------------------------|
| Engine Warranty | years | 4 YEAR WARRANTY |
| Limited Pump Warranty | years | 2 |
| Limited Frame Warranty | years | 5 |
| Limited Accessory Warranty | days | 90 |

*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).