



JETWAVE®

HIGH PRESSURE CLEANERS

Distributed by:

HYNOX™ 130 1900 psi • 10 l/pm



Single Phase



Hot Water



Heavy Duty Usage

FIELDS OF APPLICATION

- Graffiti Removal
- Building Cleaning
- Marine Anti-Fouling
- Wine Barrel Washing
- Quarantine Wash-bays
- Heavy Vehicle Cleaning
- Oil and Grease Removal
- Farming Equipment Cleaning
- Earthmoving Equipment Wash Down

The Hynox 130™ will blast away grease and grime professionally. Engineered and assembled using only the best quality Italian and global components.



HERO INNOVATION



Protection

Formed stainless steel cover and chassis to safeguard the heart of your investment.

STANDOUT FEATURES



Professional Italian triplex Interpump delivers performance and longer life.



Maintenance free low speed, electric motor, air cooled and protected with thermal cut-out.



Brass washable inlet water filter.



Integrated accessory storage for hose, gun and lance.



90% fuel efficient environmentally friendly V3 vertical diesel fired hot water burner system.



Jetwave Safety System™ (JSS) to prevent over pressurisation.



Low speed professional pump for increased reliability and longer maintenance intervals.



Stainless steel by-pass cooling water tank.



Professional line accessories.



Quality pressure gauge.



Brass adjustable unloader valve for user flexibility.



Jetwave Group
 72-74 Richmond Road
 Keswick | Adelaide
 South Australia | 5035 | AU
 +61 8 8371 3599
 sales@jetwave.com.au
 jetwave.com.au

Ergonomics - Trolley frame designed for durability.

Robust - Stainless steel chassis to withstand tough environmental conditions.


Portability - Heavy duty solid rubber wheels.



User Friendly - Easy to fill fuel tank.

Power - Vertical V3 burner system with 3mm coil wall and stainless steel housing.

STANDARD EQUIPMENT

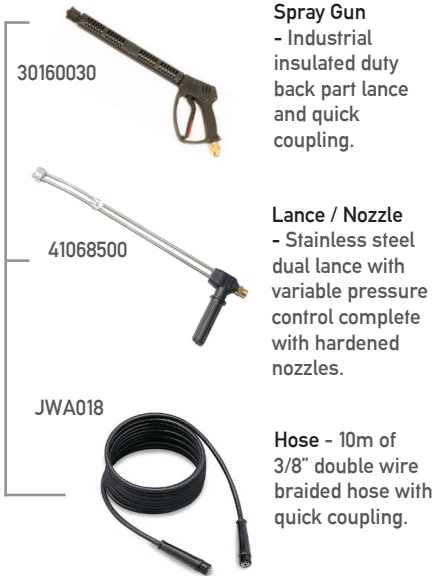

Spray Gun
 - Industrial insulated duty back part lance and quick coupling.

Lance / Nozzle
 - Stainless steel dual lance with variable pressure control complete with hardened nozzles.

Hose - 10m of 3/8" double wire braided hose with quick coupling.

OPTIONAL ACCESSORIES

| | | |
|----------------------------------------------|-----|----------|
| 1. Complete Turbo Head with Lance | p/n | JWA158 |
| 2. Additional High Pressure Hose (per metre) | p/n | 52001 |
| 3. High Pressure Swivel | p/n | 26105000 |
| 4. LS3-1 Foaming Lance with Tank | p/n | JWA221 |
| 5. High Pressure Hose Reel (cap 30m) | p/n | 1060CMPL |
| 6. Sandblasting Kit | p/n | JWA029 |
| 7. Sludge Kit | p/n | 80005 |

| | | |
|--------------|-----|--------|
| Product Code | p/n | 10249C |
|--------------|-----|--------|

TECHNICAL DATA

| | | |
|-------------------------------|-----------|------------|
| Working Pressure | psi / bar | 1900 / 130 |
| Flow Rate | l/pm | 10 |
| Max Water Inlet / Outlet Temp | °c | 60 / 90 |

INTENDED APPLICATION

| | | |
|---------------------------|--------------|----------------------|
| Usage Frequency | hours / type | 4 daily / Continuous |
| Category of Dirt / Debris | type | Light |

ELECTRICAL FEATURES

| | | |
|----------------|----------------------|-----------------------|
| Motor | type | Induction |
| Power Supply | Ph / V / Hz | 1 / 230 / 50 |
| Absorbed Power | HP / kW / pole (rpm) | 3.6 / 2.7 / 4 (1450) |
| Cable Length | metres | 5 |
| Control | type | By-pass System™ (BPS) |

HYDRAULIC FEATURES

| | | |
|-----------------------|-------|---------------------------------------------|
| Pump / Head / Pistons | type | Interpump Plunger Triplex / Brass / Ceramic |
| Motor Pump Coupling | type | Direct |
| Pump Speed | rpm | 1450 |
| Unloader Valve | type | Independent |
| Water Tank | y / n | Y |
| Safety Valve | y / n | Y |
| Orifice / Nozzle | size | 035 |

THERMAL FEATURES

| | | |
|-------------------------------|--------|------------------------------|
| Burner Model | type | Vertical V3 |
| Fuel Supply | type | Diesel |
| Fuel Tank Capacity | litres | 24 |
| Burner Fuel Consumption (max) | l/ph | 5.14 |
| Coil | type | Mild steel 3mm wall seamless |
| Housing Material | type | Stainless steel |

OTHER FEATURES

| | | |
|---------------------------|------|------------------------------------------------------------|
| Adjustable Pressure | y/n | Y |
| Hose Reel Provision | y/n | Y |
| Frame Structure | type | Stainless steel sheet / tubular with stainless steel cover |
| Onboard Accessory Storage | y/n | Y |
| Detergent Injector | y/n | Y - High pressure adjustable |

DIMENSIONS & WEIGHT

| | | |
|-------------------|--------------|--------------------------|
| Approx Weight | kg | 95 unit / 102 boxed |
| Unit Dimensions | mm | 920(L) x 600(W) x 730(H) |
| Boxed Dimensions | mm | 950(L) x 650(W) x 750(H) |
| Number per Pallet | type: pieces | Custom: 1 |

WARRANTY(S)

| | | | |
|----------------------------|-------|----|--|
| Motor Warranty | years | 2 | |
| Limited Pump Warranty | years | 2 | |
| Limited Frame Warranty | years | 5 | |
| Limited Coil Warranty | years | 2 | |
| Limited Accessory Warranty | days | 90 | |



The manufacturer reserves the right to modify design features and technical facts without notice; due to our principals of continuous improvement.