



JETWAVE®

HIGH PRESSURE CLEANERS

Distributed by:

SENATOR™ 280-21 4000 psi • 21 l/pm



Petrol Driven



Cold Water



Heavy Duty Usage

FIELDS OF APPLICATION

- Roof Cleaning
- Drain Cleaning
- Construction Site & Equipment Cleaning
- Building Washdown
- Factory Washdown
- Large Plant Washdown



The Jetwave® Senator™ 280-21 has the V-Twin powered by HONDA™ to clean a large construction site or factory with ease. Australian engineered and assembled using only the best quality Italian and global components.



Shown with optional water tank.

HERO INNOVATIONS



Optimise

6 x anti-vibration protection for quieter performance.



Durable

Foam filled 14" puncture proof tyres.

STANDOUT FEATURES



Professional Italian triplex Interpump delivers performance and longer life.



World class easy start HONDA™ GX630 Industrial Series OHV V-twin Engine.



Dual M22 screw hose coupling system.



Jetwave Safety System™ (JSS) thermal valve to prevent overheating in excessive bypass and over pressurisation.



Pump rubber foot mounted.



Easy electric key start with maintenance free battery.



Brass washable inlet water filter.



Integrated accessory storage for gun and lance.



Low speed professional pump for increased reliability and longer maintenance intervals.



Professional line accessories.



Quality pressure gauge.



Jetwave Group
 72-74 Richmond Road
 Keswick | Adelaide
 South Australia | 5035 | AU
 +61 8 8371 3599
 sales@jetwave.com.au
 jetwave.com.au

Ergonomics - 4 wheel trolley frame designed for durability.

Quality - Industry proven 'Italian' pump.




Robust - Welded hot dipped galvanised frame with convenient gun and lance holder.

Power - Easy start HONDA™ GX630 engine.

Portability - Heavy duty foam filled wheels.

STANDARD EQUIPMENT

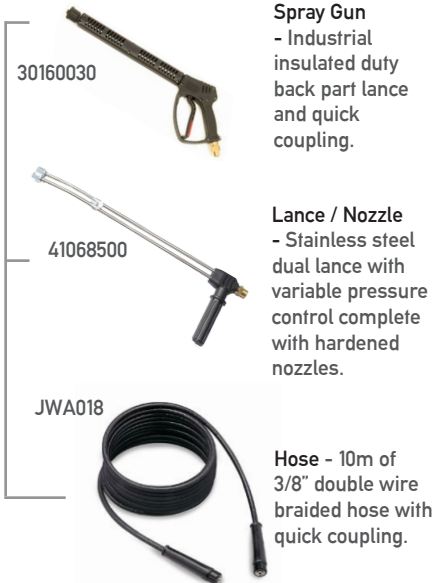

Spray Gun
 - Industrial insulated duty back part lance and quick coupling.

Lance / Nozzle
 - Stainless steel dual lance with variable pressure control complete with hardened nozzles.

Hose - 10m of 3/8" double wire braided hose with quick coupling.

OPTIONAL ACCESSORIES

1. Complete Turbo Head with Lance	p/n	JWA158
2. Additional High Pressure Hose (per metre)	p/n	52001
3. High Pressure Swivel	p/n	26105000
4. LS3-1 Foaming Lance with Tank	p/n	JWA221
5. High Pressure Hose Reel (cap 30m / 60m)	p/n	1060CMPL / 1065CMPL
6. Hammerhead™ Whirlaway 20" ABS	p/n	DCFSCP20
7. Hammerhead™ Whirlaway 22" Stainless Steel	p/n	DCFSCS22Z
8. Engine Hour Meter	p/n	19598
9. Giraffe™ Telescopic Lance	p/n	DCLTG24A4
10. Sandblasting Kit	p/n	JWA164
11. Sludge Kit	p/n	80005
12. Drain Kit	p/n	HOP3X20
13. 26L Stainless Steel Water Bypass Tank	p/n	90008-26S

Product Code	p/n	HP280-21PE
--------------	-----	------------

TECHNICAL DATA

Working Pressure	psi / bar	4000 / 280
Flow Rate	l/pm	21
Max Water Inlet/Outlet Temp	°c / °f	60 / 140

INTENDED APPLICATION

Usage Frequency	hours / type	4 - 8 daily / Constant
Category of Dirt / Debris	type	Heavy

MOTOR FEATURES

Engine	type	HONDA™ GX630 (4 stroke, air cooled)
Power	cc	630
Fuel Supply	type	Unleaded
Fuel Capacity	litres	20
Low Oil Shutdown	y / n	Y (indicator light)
Hour Meter	y / n	Y (standard)
Starting System	type	Electric key start

HYDRAULIC FEATURES

Pump	type	Interpump Plunger Triplex / Brass / Ceramic
Motor Pump Coupling	type	Gearbox Drive
Pump Speed	rpm	1450
Unloader Valve	type	Independant
Safety Valve	y / n	Y
Orifice / Nozzle	size	055

OTHER FEATURES

Adjustable Pressure	y / n	Y
Hose Reel Provision	y / n	Y
Frame Structure	type	Welded hot dipped galvanised 4 wheel roll
Onboard Accessory Storage	y / n	Y
Detergent Injector	y / n	Y - Downstream low pressure adjustable

DIMENSIONS & WEIGHT

Approx Weight	kg	160 unit / 170 boxed
Unit Dimensions	mm	1120(L) x 700(W) x 900(H)
Boxed Dimensions	mm	1100(L) x 600(W) x 820(H)
Number per Pallet	type: pieces	AS: 2 / Euro: 1

WARRANTY(S)

Engine Warranty	years	4 YEAR WARRANTY
Limited Pump Warranty	years	2
Limited Frame Warranty	years	5
Limited Accessory Warranty	days	90



POWERED by HONDA™

The manufacturer reserves the right to modify design features and technical facts without notice, due to our principals of continuous improvement.