



# JETWAVE®

## HIGH PRESSURE CLEANERS

Distributed by:

# BLACK™ GX 4000 psi • 13.5 l/pm



Petrol Driven



Cold Water



Weekly Usage

### FIELDS OF APPLICATION

Brick Cleaning  
Run-about Jobs  
Concrete and Trade  
Council Applications  
Agricultural Equipment

The Jetwave® Black™ GC is the perfect, premium residential, small cold water petrol powered by HONDA™ pressure washer for cleaning yards and equipment. Engineered and assembled in the USA.



### STANDOUT FEATURES



AAA™ triplex plunger pump delivers performance.



World class HONDA™ GX270 Commercial Series OHV Engine.



Dual M22 screw hose coupling system.



Inlet water filter.



Brass pump head with ceramic sleeve pistons.



Jetwave Safety System™ (JSS) thermal valve to prevent overheating in excessive bypass.



Ergonomic spray gun for comfort and control.



0°, 15°, 25°, 40° and snap-on nozzles.



13" premium pneumatic tyres.



Jetwave Group  
72-74 Richmond Road  
Keswick | Adelaide  
South Australia | 5035 | AU  
+61 8 8371 3599  
sales@jetwave.com.au  
jetwave.com.au

## STANDARD EQUIPMENT



**Spray Gun -**  
Heavy duty back  
part lance with  
side grip.

JWA323B



**Lance / Nozzle**  
- Lance with 4 x  
stainless steel snap  
nozzles and 1 x  
chemical nozzle.

JWA314

CD0030




**Hose - 15m of 3/8"**  
steel dual braided  
hose with quick  
coupling.

40291

## OPTIONAL ACCESSORIES

1. Complete Turbo Head with Snap Tail	p/n	Included
2. 15m Extension Hose + M22 Joiner	p/n	40290C
3. LS12 Foaming Lance with Tank	p/n	JWA221-LS12
4. 15" Whirlaway (Steel) ABS	p/n	71008237

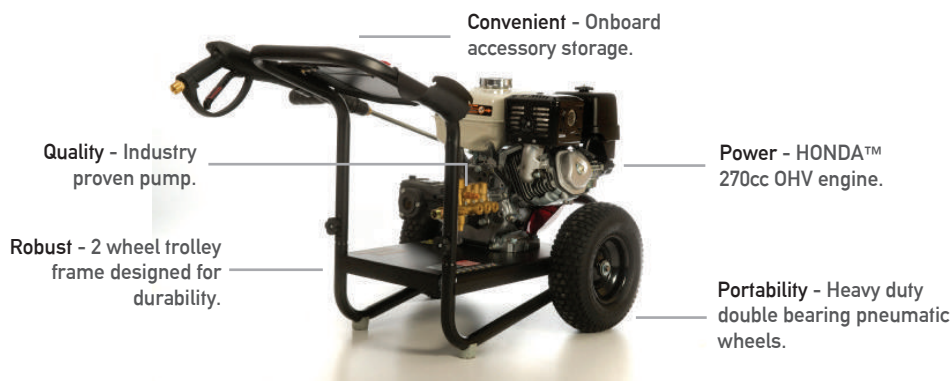

Product Code	p/n	CW4000-13.5P
--------------	-----	--------------

## TECHNICAL DATA

Working Pressure	psi / bar	4000 / 275
Flow Rate	l/pm	13.5
Max Water Inlet Temp	°c / °f	60 / 140
Class	grade	A

## INTENDED APPLICATION

Usage Frequency	hours / type	1 - 2 daily / Weekly
Category of Dirt / Debris	type	Light - Medium

## MOTOR FEATURES

Engine	type	HONDA™ GX270 (4 stroke, air cooled)
Power	hp / cc	9 / 270
Fuel Supply	type	Unleaded
Fuel Capacity	litres	4.5
Low Oil Shutdown	y / n	Y
Starting System	type	Recoil / Pull

## HYDRAULIC FEATURES

Pump / Head / Pistons	type	Plunger Triplex / Brass / Ceramic Coated
Motor Pump Coupling	type	Direct Drive
Pump Speed	rpm	3400
Unloader Valve	type	Integral
Powerboost	y / n	Y
Orifice / Nozzle	size	04

## OTHER FEATURES

Adjustable Pressure	y / n	Y
Hose Reel Provision	y / n	N
Frame Structure	type	Heavy duty steel 2-wheel trolley
Onboard Accessory Storage	y / n	Y
Detergent Injector	y / n	Y - Downstream low pressure

## DIMENSIONS & WEIGHT

Approx Weight	kg	66 unit / 70 boxed
Unit Dimensions	mm	940(L) x 560(W) x 680(H)
Boxed Dimensions	mm	750(L) x 620(W) x 680(H)
Number per Pallet	type: pieces	AS: 4 or 8 / Euro: 2 or 4

## WARRANTY(S)

Motor Warranty	years	3	
Warranty	years	1	

\*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).

**POWERED by**  
**HONDA™**

The manufacturer reserves the right to modify design features and technical facts without notice; due to our principals of continuous improvement.