





—
**INNOVATION
POWERED
BY EXPERIENCE**

2021/2022 PRODUCTS

ABOUT US	P 04
Crommelins Difference	05

GENERATORS	P 06
Petrol	09
Diesel	11
Leisure	12
Welder	13
Workstation	15
Standby	16
AVR	17

COMPACTION & CONCRETING	P 18
Compactors	20
Trowellers	21
Drive units	23
Vibratory	24

CUTTING & DRILLING	P 26
Brick saws	27
Tile saws	28
Floor saws	29

PRESSURE CLEANERS	P 30
Petrol	35
Diesel	36
Accessories	37

PUMPS	P 38
Fire fighting	41
Clear water	44
Poly	47
Trash	48
Submersible	50
Flexible	52
Water cart	53

FLOORING	P 54
Drum	55
Orbital	56
Edger	57
Rotary	58
Accessories	59

GROUND CARE	P 60
Trenchers	61
Wood chippers	62
Posthole diggers	63
Picket drivers	64
De-thatchers	65
Turf cutters	66
Lawn aerator	67
Lawn rollers	68
Hedge trimmer harness	69

AIR EQUIPMENT	P 70
Carper dryers	71
Ventilators	72
Air filtration	73

GENERAL TRADE	P 74
Material handling	75
Air compressors	78
Wallpaper steamer	79

ENGINES	P 80
Robin	81
Robin features	82

WARRANTY	P 84
Warranty explained	86



—
**INNOVATION
POWERED
BY EXPERIENCE**



ABOUT US

At Crommelins Machinery, we always put the customer first. We respond promptly, deliver a quality product, provide the right information, follow up, and keep our promises. We approach every situation with a 'Can Do' attitude and use the 'One Team' method to make sure that the solutions we provide are cohesive and safe.

From humble beginnings selling equipment out of the back of a Holden station wagon, CROMMELINS has grown to be the strong family owned business it is today. Employing over 35 people nationally whilst being a supplier of choice to the hire and rental industry for portable powered equipment.



SAFETY

We care about the health and wellbeing of our staff, visitors and customers.



CUSTOMER FOCUS

We respect our customers and always put them first.



CAN DO

We go the 'extra mile' and always look for ways to innovate and improve our offerings.



ONE TEAM

We work together to achieve our common goals. One Team – One Goal – No Limits.



SUSTAINABILITY

We actively seek ways to contribute to the wellbeing of our community whilst building our long term value.



TAKE OWNERSHIP

We take responsibility for our actions, fix problems and learn from them.

CROMMELINS DIFFERENCE

Crommelins Machinery has always been at the forefront of innovation within the Australian market, and this has been powered by the experience of its staff in listening to what the customer needs and introducing products that meet the demands of the industry. All products are rigorously tested

and constantly reassessed to ensure they can outperform. With more than 60 years in Hire and Construction and a founding member of the Hire and Rental Industry Association, Crommelins has been providing high quality portable machinery products to Australians since 1958.



PREFERRED SUPPLIER TO THE HIRE INDUSTRY

Over our long history, Crommelins Machinery has laid a foundation of reliability and trust within the Hire and Rental Industry.



AUSTRALIAN OWNED, EST. IN 1958

We are proud to be Australian owned and operated. We have a strong awareness of Australian geographic, government, business, product and worksite requirements and standards.



QUALITY PRODUCTS

We respect the reputation of the Crommelins Machinery brand, a trust built with customers over more than 60 years. Improvements and innovations are important to us but not at the risk of quality. Only products that stand up to our rigorous testing process will receive our tick of approval.



NEW PRODUCTS, INNOVATIVE TECHNOLOGY

Crommelins Machinery is invested in continuously improving our existing products and expanding our range with new product innovations. Although we are focused on the needs of our Australian clientele, we accept nothing less than world's best practice.



RELIABLE SERVICE

When you've purchased a product, Crommelins Machinery will go the extra mile to assist you when you need parts, service or backup support.



CUSTOM PRODUCTS

We appreciate that each of our customers has unique requirements, which is why we offer a range of customisations for the vast majority of our products.

GENERATORS

CHOOSING YOUR GENERATOR

Crommelins Machinery has been building generators for over 60 years and has a range of quality generators for all industries. Crommelins Machinery can offer a generator to your specific needs, and they can also be customised.

STANDARD GENERATOR

- Genuine Robin/Honda/Yanmar engines
- Australian fabricated steel frame
- Quality AVR alternator
- 2 x Switched outlets

CHOOSING THE CORRECT GENERATOR

1. Figure out what item/s need powering.
2. Add the total wattage of item/s together.
3. Determine the total wattage equals less than the maximum output of the generator. For continuous loads, use continuous output.
4. Choose/buy your generator

At start up, electric motors consume approximately 3 times the power requirement of the appliance. Make sure to check the generator continuous and/or its maximum output wattage when calculating power required.

Note: The initial 'start-up' power of some equipment/motors require 3x the wattage to get them running.

BEST **GOOD** **NOT RECOMMENDED**

SUITCASE STYLE 2.4kw to 3kw	SMALL 4kw to 6kw	MEDIUM 6.5kw to 8kw	LARGE 9kw to 10kw	BACKUP +12.0kw
CAMPING / GENERAL PURPOSE	GOOD	GOOD	NOT RECOMMENDED	NOT RECOMMENDED
POWER TOOLS / 12V CHARGING	GOOD	GOOD	NOT RECOMMENDED	NOT RECOMMENDED
CARAVANNING / RV / MOTOR HOMES	NOT RECOMMENDED	GOOD	NOT RECOMMENDED	NOT RECOMMENDED
FARMING / AGRICULTURE / HIRE AND RENTAL / FOOD VANS	NOT RECOMMENDED	GOOD	NOT RECOMMENDED	NOT RECOMMENDED
WORK SITES / WELDING	NOT RECOMMENDED	GOOD	NOT RECOMMENDED	NOT RECOMMENDED
MINING / EVENTS / FETES / BACKUP	NOT RECOMMENDED	NOT RECOMMENDED	GOOD	NOT RECOMMENDED

EQUIPMENT	WATTS RUNNING
MOBILE PHONE CHARGER	50
HAIR DRYER	1000-1500
MICROWAVE	1200+
KETTLE	1600-2000
HOUSEHOLD FRIDGE	300-600
PORTABLE FAN	40
COFFEE MAKER	1200
BELT SANDER	950
PRESSURE WASHER	1200
AIR COMPRESSOR	1400
CIRCULAR SAW	1500
SPACE HEATER	1000
CARAVAN AIR CONDITIONER	1500+
LAPTOP COMPUTER	500
9" ANGLE GRINDER	1500-2000
ELECTRIC DRILL 3/8"	500-700
TELEVISION	75-200
TOASTER	800-1250
WELDER 140A	5000
WATER PUMPS	275-1000
OVEN	4000-8000

CUSTOMISE YOUR GENERATORS

Crommelins generators can be customised to suit most requirements and applications. Due to their proven reliability, high performance and customisation many Crommelins generators are prevalent in Hire Fleets.

CUSTOM OPTIONS

- Long range fuel tanks (some models)
- Electric start with AGM battery
- Honda powered
- Lockable battery isolator
- Emergency stop button
- 4 x Wheels (solid, no-flat) with brakes
- 2, 4 and 6 wheel options
- Weatherproof (IP66) outlets
- Anderson jump plugs
- Recoil start locks
- Custom frame colouring
- Asset numbering and logo plate

STANDARD HIREPACK

- Central lifting bar/hook
- 2 x Wheel kit
- Foldout transport handle
- Weatherproof outlets & RCD protection

CROMMELINS STEEL FRAMES

- Australian made steel frames
- Customisable to your specifications
- Heavy duty tubular steel
- Powder coated

STANDARD MINE SPECIFICATION- DIESEL ONLY

- Hirepack
- Electric start with AGM battery
- Lockable battery isolator
- Emergency stop button
- Bunding
- 1kg fire extinguisher

*Please confirm these specs meet your local Mine-site requirements when ordering

ALTERNATORS EXPLAINED

Below is a guide to help match the alternator to the application.

<p>STANDARD ALTERNATOR (CONDENSER TYPE)</p>	<p>Suitable for power tools and resistive loads such as a kettle, a toaster, lights and other equipment not requiring a great accuracy of voltage control of power supply. A simple low maintenance design for basic equipment. Most generators come with a standard condenser type alternator.</p>
<p>AUTOMATIC VOLTAGE REGULATOR (AVR)</p>	<p>Used for when power is required for more sensitive equipment and when the generator will be used to start electric motors. AVR alternators provide a more stable voltage output to compensate for the variation in voltage from load changes.</p>
<p>INVERTER (ELECTRONIC VOLTAGE CONTROL)</p>	<p>For use with sensitive equipment such as computers. The inverter control system maintains an extremely high accuracy level of voltage and frequency fluctuation with very low sine wave distortion. The system also allows for the engine speed to be automatically adjusted in direct proportion to the load applied (econo-mode) maximizing fuel efficiency, while maintaining 240v supply.</p>

ALTERNATOR BRANDS

- Sincro - Crommelins Generators
- Mecce Alte - Cromtech Generators
- Stamford - Crommelins standby generators

CROMMELINS PETROL GENERATORS

Crommelins Machinery has been building generators for over 60 years. These generators power most equipment and are perfect for the hire, agricultural and construction industries, and recreational use. The Crommelins range of petrol generators are sized from 5000 to 8000 watts, and you can order to hire spec.

STANDARD FEATURES

- 32mm Australian fabricated steel frame
- Genuine Robin/Honda industrial engine
- Hirepack (2 x wheels, transport handle, lifting hook, weatherproof outlets with RCD protection)
- Individual circuit overload protection
- IP66 Workplace compliant
- Sincro brushless alternator with overload protection
- Two year manufacturer's warranty
- Assembled and tested in Australia

IDEAL FOR

- Hire and rental
- Farm and rural
- Backup power
- Government Shires and councils
- Work sites

OPTIONAL EXTRAS

- Electric start with AGM battery
- Honda powered
- Custom frame colouring
- Asset numbering and logo plate



	CG64RPH	CG85RPH	CG100BPEH
MAXIMUM OUTPUT (W)	5000W	6800W	8000W
CONTINUOUS OUTPUT (W)	4700W	6200W	7500W
STARTING SYSTEM	RECOIL START	RECOIL START	ELECTRIC START
OUTLETS (SINGLE PHASE)	2 X 15AMP	2 X 15AMP	2 X 15AMP
ALTERNATOR	SINCRO	SINCRO	SINCRO
VOLTAGE/FREQUENCY	240V - 50HZ	240V - 50HZ	240V - 50HZ
ENGINE MODEL	EX40	14HP EX40	16HP BS16HPES
ENGINE BRAND	ROBIN	ROBIN	VANGUARD
FUEL TANK	7L	7L	8.4L
RUNNING TIME (RATED OUTPUT)	1.9HR	1.9HR	2HR
DECIBELS @ 7M	76db	76db	76db
WEIGHT (DRY)	89KG	95KG	105KG
DIMENSIONS (LxWxH)	935 x 535 x 725MM	935 x 535 x 725MM	970 x 515 x 715MM
MANUFACTURERS WARRANTY	2 YEARS	2 YEARS	2 YEARS

CROMTECH PETROL GENERATORS

Designed for general use, this trade range is perfect for construction, agriculture, worksites and farming. These generators will provide you with quality and durability with no fuss. Standard and trade pack models are available.

STANDARD FEATURES

- 25mm Australian fabricated steel frame
- Genuine Robin industrial engine
- Mecc Alte brushless alternator
- Assembled and tested in Australia
- Two year manufacturer's warranty
- Twin 240V single phase outlets

IDEAL FOR

- General purpose use
- Tradies and residential
- Farm and rural
- Construction and work sites

TRADEPACK OPTIONS INCLUDES

- Central lifting bar/hook
- 2 x Wheel kit
- Foldout transport handles
- IP66 Weatherproof outlets and RCD protection



	TG40RP	TG40HP	TG60RP	TG60HP	TG85RP	TG85HP	TG100BPE
MAXIMUM OUTPUT (W)	3200W	3200W	5000W	5000W	7000W	7000W	8000W
CONTINUOUS OUTPUT (W)	3000W	3000W	4700W	4700W	6400W	6400W	7500W
STARTING SYSTEM	RECOIL START	RECOIL START	RECOIL START	RECOIL START	RECOIL START	RECOIL START	ELECTRIC START
OUTLETS (SINGLE PHASE)	2 X 10AMP	2 X 10AMP	1 X 10AMP, 1 X 15AMP	1 X 10AMP, 1 X 15AMP	2 X 15AMP	2 X 15AMP	2 X 15AMP
ALTERNATOR	MECC ALTE	MECC ALTE	MECC ALTE	MECC ALTE	MECC ALTE	MECC ALTE	MECC ALTE
VOLTAGE/FREQUENCY	240V - 50HZ	240V - 50HZ	240V - 50HZ	240V - 50HZ	240V - 50HZ	240V - 50HZ	240V - 50HZ
ENGINE MODEL	7HP EX21	GX200	9HP EX27	GX270	14HP EX40	GX390	16HP BS16HPES
ENGINE BRAND	ROBIN	HONDA	ROBIN	HONDA	ROBIN	HONDA	BRIGGS & STRATTON VANGUARD
FUEL TANK	3.6L	3.1L	6.1L	5.3L	7L	6.1L	8.4L
RUNNING TIME (RATED OUTPUT)	2.4HR	1.8HR	2.6HR	2.6HR	1.9HR	1.7HR	2.0HR
DECIBELS @ 7M	68db	68db	70db	70db	72db	72db	76db
WEIGHT (DRY)	40KG	40KG	56KG	56KG	70KG	70kg	105KG
DIMENSIONS (LxWxH)	670 x 450 x 410MM	670 x 450 x 410MM	710 X 500 x 540MM	710 X 500 x 540MM	710 x 500 x 540MM	710 x 500 x 540mm	810 x 500 x 610MM
MANUFACTURERS WARRANTY	2 YEARS	2 YEARS	2 YEARS	2 YEARS	2 YEARS	2 YEARS	2 YEARS

CROMMELINS DIESEL GENERATORS

Crommelins Diesel Generators are suitable for situations when it is not practical to have petrol powered generators, such as mining and oil industry applications. They are low maintenance heavy duty industrial generators with the benefit of low running cost and durability over time.

STANDARD FEATURES

- Electric start with AGM battery
- Sincro brushless alternator
- Workplace compliant
- 32mm Australian fabricated steel frame
- Two years manufacturer's warranty
- Assembled and tested in Australia
- Individual overload protection

IDEAL FOR

- Hire and rental
- Mining and oil

OPTIONAL EXTRAS

- Stet Cleave
- Long range fuel tank (16L)
- Anderson jump plug
- Recoil start lock
- Custom frame colouring
- Asset numbering and logo plate

MINE SPECIFICATION OPTION INCLUDES

- Emergency stop
- Battery isolator
- Bunding tray
- Fire extinguisher



	CG40YDEH	CG69YDEH	CG80ZDEH	CG80KDEH
MAXIMUM OUTPUT (W)	3800W	5500W	6000W	6000W
CONTINUOUS OUTPUT (W)	3500W	5000W	5000W	5000W
STARTING SYSTEM	ELECTRIC START	ELECTRIC START	ELECTRIC START	ELECTRIC START
OUTLETS (SINGLE PHASE)	2 X 10AMP	1 x 10 AMP 1 X 15AMP	2 X 15AMP	2x 15AMP
ALTERNATOR	SINCRO	SINCRO	SINCRO	SINCRO
VOLTAGE/FREQUENCY	240V - 50HZ	240V - 50HZ	240V - 50HZ	240V - 50HZ
ENGINE MODEL	6.7HP L70	10HP L100	10.5HP IB40	12HP KD500
ENGINE BRAND	YANMAR	YANMAR	HATZ	KOHLER
FUEL TANK	2.4L	5.4L	5L	5.0L
DECIBELS @ 7M	81db	81db	82db	82db
WEIGHT (DRY)	85KG	116KG	130KG	130KG
DIMENSIONS (LxWxH)	710 x 450 x 530MM	840 x 520 x 640MM	920 x 710 x 950MM	960 x 700 x 910mm
MANUFACTURERS WARRANTY	2 YEARS	2 YEARS	2 YEARS	2 YEARS

CROMTECH GENERATORS

Crommelins have hand selected this range of quality inverter generators for recreational and domestic use. These generators come with multiple power options, are petrol powered and come with an eco-mode for economical operation.

IDEAL FOR

- Camping, caravanning & RVs
- Portable fridge/freezer
- Home and small office backup power
- Precision instruments
- Small power tools
- Fetes and markets

CTG2500I FEATURES

- Bonus dust cover
- Lightest model in its class

CTG4500IE FEATURES

- Digital Display (Volts, Hz, Kw, Hrs)
- Extendable handle
- Large rubber wheels

T7000IE FEATURES

- Digital display (Volts, Hz, Kw, Hrs)
- Mobile App
- Large rubber wheels

STANDARD FEATURES

- 2 x Outlets
- USB Outlets
- Main LED sensors (low oil alarm, overload protection, output light)
- Eco-mode adjusts output as load requires and lowers noise
- AC Reset button
- 4-Stroke, Forced air cooled, OHV, recoil start
- Pure Sine wave
- Easy maintenance with convenient access covers
- One year domestic use Cromtech warranty



	CTG2500I	CTG4500IE	TG7000IE
MODEL NAME	CROMTECH OUTBACK 2.4kw	CROMTECH OUTBACK 4.5kw	CROMTECH INVERTER GENERATOR 7000IE
MAXIMUM OUTPUT (W)	2400W	4500W	7000W
CONTINUOUS OUTPUT (W)	2100W	3700W	6000W
STARTING SYSTEM	RECOIL START	RECOIL/ REMOTE/ ELECTRIC	RECOIL/ REMOTE/ ELECTRIC/ BLUETOOTH START
OUTLETS (SINGLE PHASE)	2	2	3 x Outlets (2x 15 AMP 1x 32 AMP)
VOLTAGE/FREQUENCY	230V - 50HZ	230V - 50HZ	240V - 50HZ
USB POWER OUTPUT	2X USB (5V)	2X USB (5V)	2X USB (5V)
12V POWER OUTPUT	12V-8AMP	12V-8AMP	12V-8AMP
ENGINE MODEL	2.6KW CROMTECH (79CC)	6HP CROMTECH LH170F (212CC)	CROMTECH LC190FD-2
FUEL TANK	5L	7L	25L
DECIBELS @ 7M	52 - 59db @7m eco mode no load 60-62 db @7m continuous rated output	55-60dB	62dB
RUNNING TIME (LOAD DEPENDING)	5 TO 20HRS	4 TO 12HRS	UP TO 17HRS
WEIGHT (DRY)	19.8KG	37.7KG	130KG
DIMENSIONS (LxWxH)	512 x 315 x 447MM	580 x 453 x 481MM	950 x 765 x 773MM
MANUFACTURERS WARRANTY	2 YEAR	1 YEAR	1 YEAR

CROMMELINS WELDER GENERATORS

Crommelins Welder Generators are a convenient combination of Arc Welding and power generation. This unit is ideally suited to rental and agricultural industries for small on-site repairs. These models can be customised to suit your requirements.

STANDARD FEATURES

- Welder Sincro brushless alternator
- Genuine Robin/Yanmar industrial engine
- Workplace compliant
- 32mm Australian fabricated steel frame
- Two year manufacturer's warranty
- Assembled and tested in Australia
- 5 metre welding lead kit

IDEAL FOR

- Hire and rental
- Mining and oil
- Farm and rural
- Shires and councils

OPTIONAL EXTRAS

- Electric start with AGM battery
- Hire pack
- Mine specification- DIESEL ONLY
- Long range fuel tank
- Anderson plugs
- Recoil start lock
- 10 metre welding lead kit

MINE SPECIFICATION

OPTION INCLUDES

- Emergency stop
- Battery isolator
- Bunding Tray
- Fire extinguisher



PICTURE FOR ILLUSTRATION ONLY

	GW200RPH	GW180YDE
WELDING AMPS (A)	60 TO 200AMP	60 TO 180AMP
MAXIMUM OUTPUT (W)	5600W	4000W
CONTINUOUS OUTPUT (W)	4480W	3200W
STARTING SYSTEM	RECOIL START	ELECTRIC START
OUTLETS (SINGLE PHASE)	2 X 15AMP	1 X 10AMP, 1 X 15AMP
ALTERNATOR	SINCRO	SINCRO
VOLTAGE/FREQUENCY	240V - 50HZ	240V - 50HZ
FUEL TYPE	PETROL	DIESEL
ENGINE MODEL	14HP EX40	10HP L100
ENGINE BRAND	ROBIN	YANMAR
FUEL TANK	7L	4.7L
RUNNING TIME (RATED OUTPUT)	1.9HR	3.3HR
DECIBELS @ 7M	72db	79db @ 1M
WEIGHT (DRY)	83KG	114KG
DIMENSIONS (LxWxH)	820 x 510 x 540MM	840 x 520 x 640MM
MANUFACTURERS WARRANTY	2 YEARS	2 YEARS

CROMTECH WELDER GENERATOR

The 200amp CROMTECH™ welder generators are powered by a Robin engine and has a low maintenance Italian Mecc Alte Alternator. The model comes in an Australian made steel roll frame.

IDEAL FOR


- Farm maintenance
- General purpose use
- Welding on-site
- Backup power

STANDARD FEATURES

- Welder Mecc Alte brushless alternator
- Genuine Robin industrial engine
- Double switched power outlets
- 25mm Australian fabricated steel frame
- Overload protection
- Two year manufacturer's warranty
- Australian assembled and tested

OPTIONAL EXTRAS

- Welding leads
- Electric start with AGM battery
- Trade pack
- Long range fuel tank
- Recoil start lock



	TGW200RP
WELDING AMPS (A)	60 TO 200A
DUTY CYCLE	200amp @ 35% DUTY CYCLE
MAXIMUM OUTPUT (W)	5600W
CONTINUOUS OUTPUT (W)	4480W
STARTING SYSTEM	RECOIL START
OUTLETS (SINGLE PHASE)	2 X 15AMP
ALTERNATOR	MECC ALTE
VOLTAGE/FREQUENCY	240V - 50HZ
FUEL TYPE	PETROL
ENGINE MODEL	14HP EX40
ENGINE BRAND	ROBIN
FUEL TANK	7.0L
RUNNING TIME (RATED OUTPUT)	1.9HR
DECIBELS @ 7M	72DB
WEIGHT (DRY)	82.5KG
DIMENSIONS (LxWxH)	710 x 500 x 540MM
MANUFACTURERS WARRANTY	1 YEAR

CROMMELINS WORKSTATION GENERATORS

The perfect combination for a mobile workshop or service vehicle. The Generator, Welder, Air Compressor is a convenient model all built into an Australian fabricated steel frame, making it easy to move from site to site.

STANDARD FEATURES

- 40L Air compressor (7.7cfm)
- Power generation 5600 watts
- Electric start with AGM battery
- Weatherproof outlets with RCD
- Sincro brushless alternator
- 32mm Australian fabricated steel frame
- Cable holders and lifting hook
- 5 metre welding leads
- Two year manufacturer's warranty
- Assembled and tested in Australia

IDEAL FOR

- Agriculture
- Air compressor equipment
- Welding on-site
- Multi-purpose use
- Service vehicles

OPTIONAL EXTRAS

- Mine specification- DIESEL ONLY
- Hire pack
- Long range fuel tank
- Battery charger
- 10 metre welding leads



10HP
ROBIN
ENGINE

	WS200RPEH	WS180YDEH
WELDING AMPS (A)	60 TO 200A	60 TO 180A
AIR COMPRESSOR FLOW RATE (CFM)	7.7CFM	7.7CFM
FUEL TYPE	PETROL	DIESEL
MAXIMUM OUTPUT (W)	5600W	4000W
CONTINUOUS OUTPUT (W)	4480W	3200W
STARTING SYSTEM	RECOIL	ELECTRIC START
OUTLETS (SINGLE PHASE)	2 X 15AMP	1 X 10AMP, 2 X 15AMP
ALTERNATOR	SINCRO	SINCRO
VOLTAGE/FREQUENCY	240V - 50HZ	240V - 50HZ
ENGINE MODEL	14HP EX40	10HP L100
ENGINE BRAND	ROBIN	YANMAR
FUEL TANK	7.0L	5.4L
RUNNING TIME (RATED OUTPUT)	1.9HR	3.3HR
DECIBELS @ 7M	72db	97db @ 1M
WEIGHT (DRY)	143KG	170KG
DIMENSIONS (LxWxH)	930 x 830 x 720MM	930 x 830 x 720MM
MANUFACTURERS WARRANTY	2 YEARS	2 YEARS

CROMMELINS STANDBY GENERATORS

Crommelins have put the big brand names you can trust together and now offer standby generator sets powered by a Kubota water cooled diesel engines and Stamford alternators with Deep Sea controllers. This range is ideal for most of those worksite, home and solar power backup needs with each model having switched single and three phase outlets for instant use.

STANDARD FEATURES

- Switched outlets with RCD circuit breakers
- Kubota diesel engine
- Deep Sea controller
- Stamford alternator (4 Pole AVR)
- Remote start and hardwire facility
- Bunded canopy with lockable doors & fuel cap
- Auto transfer switch socket
- Central lifting hook & forklift pockets
- Easy access panels for service and maintenance
- 50°C Rated radiator suits Australian conditions
- Two year Kubota engine warranty (2000hrs)
- One year Stamford alternator warranty (1000hrs)
- One year manufacturers warranty

IDEAL FOR

- Event hire
- Rental
- Residential
- Commercial

OPTIONAL EXTRAS

- Auto transfer switch



	CHK13S	CHK13S3	CHK20S3	CHK30S3
MAX. PRIME OUTPUT (KVA / KW)	13KVA / 10.8KW	13KVA / 10.8KW	17KVA / 13.6KW	30KVA / 24KW
CONT. STANDBY OUTPUT (KVA / KW)	14KVA / 11.2KW	14KVA / 11.2KW	19KVA / 15.2KW	33KVA / 26.4KW
PHASE	SINGLE	THREE	THREE	THREE
OUTLETS (SINGLE / THREE PHASE)	2 X 15AMP	1 X 15AMP, 1 X 32AMP 3P	1 X 15AMP, 1 X 32AMP 3P	1 X 15AMP, 1 X 32AMP 3P
ALTERNATOR	STAMFORD PI144E	STAMFORD PI044G	STAMFORD PI144D	STAMFORD PI144G
OUTPUT AMPS	54.2 / 58.3 AMPS	18.1 / 19.5 AMPS	23.7 / 26 AMPS	41.7 / 45.9 AMPS
DEEPSEA CONTROLLER	DEEPSEA DSE6020	DEEPSEA DSE6020	DEEPSEA DSE6020	DEEPSEA DSE6020
AUTO TRANSFER SOCKET	YES	YES	YES	YES
2 WIRE REMOTE START	YES	YES	YES	YES
ENGINE BRAND / MODEL	KUBOTA D1703-BG	KUBOTA D1703-BG	KUBOTA V2203-BG	KUBOTA V3300-BG
FUEL TANK	100L	100L	100L	114L
RUNNING TIME (RATED OUTPUT) 75%	34HR	34HR	26HR	19HR
DECIBELS @ 7M	64db	63db	64db	65db
WEIGHT (DRY)	625KG	601KG	646KG	910KG
DIMENSIONS (LxWxH)	1782 x 868 x 1115MM	1782 x 868 x 1115MM	1834 x 868 x 1115MM	2000 x 925 x 1300MM

CROMTECH AVR GENERATOR

Designed for general use, this trade range is perfect for construction, agricultural, worksites and farming, and will provide quality and durability with no fuss.

IDEAL FOR

- General purpose use
- Tradies and residential
- Farm and rural
- Fetes and markets

STANDARD FEATURES

- 2x Outlets (single phase - 15 Amp)
- RCD protection
- Electric start and recoil start
- Fold-out handles
- Steel frame with large wheels
- 4-Stroke, air cooled, OHV engine
- Hours operation, Hz, Voltage meter
- Battery charging (12V-8.3Amp)
- Low oil alarm, overload alarm, output indicator
- Large 25L fuel tank
- One year Cromtech warranty



	TG6500VE	TG6000DVE
MAXIMUM OUTPUT (W)	6500W	6000W
CONTINUOUS OUTPUT (W)	6000W	5500W
STARTING SYSTEM	ELECTRIC START	ELECTRIC START
OUTLETS (SINGLE PHASE)	2 X 15AMP	2 X 15AMP
VOLTAGE/FREQUENCY	230V - 50HZ	230V - 50HZ
12V POWER OUTPUT	12V-8.3AMP	12V-8.3AMP
ENGINE MODEL	CROMTECH (420cc)	CROMTECH (474cc)
OIL CAPACITY (L)	1.1L	1.1L
FUEL TANK	25L	12.5L
DECIBELS @ 7M	74db	95db @1m
WEIGHT (DRY)	87KG	110KG
DIMENSIONS (LxWxH)	715 x 545 x 605MM	780 x 500 x 640MM
MANUFACTURERS WARRANTY	1 YEAR	1 YEAR

COMPACTION & CONCRETING

PORTABLE CONSTRUCTION EQUIPMENT

Crommelins offer an extensive range of concreting and construction equipment. From compactors to trowel machines and more. All products are designed to deliver outstanding performance and reliability.

Crommelins vast range of portable construction equipment is ideal for a range of uses depending on the product.

IDEAL FOR

- Soil compaction for turf
- Trench compaction (CC60R)
- Brick paving
- Hire and rental industry
- Paving and landscaping
- Concrete slabs and tilt panels
- Concrete tilt panels
- Mining & diesel related jobs
- Power source to drive flex pumps
- Power source to drive concrete vibrator shafts
- Stairways
- Footings
- Slabs

INDUSTRY

- Hire and rental
- Building and construction
- Commercial
- DIY
- Civil
- Construction

CROMMELINS PLATE COMPACTORS

Crommelins Compactors are built to industry best standards. These popular units will withstand the heavy demand of use by rental companies and contractors. Outstanding performance and longevity make them a perfect choice for any trade.

STANDARD FEATURES

- Assembled and tested in Australia
- Soft grip handle
- Fast travel speed for increased productivity
- Easy to reach throttle control
- Central lifting hook
- Lifting bar and engine protection frame (CC70R/H model)
- Two years warranty

IDEAL FOR

- Soil compaction for turf
- Trench compaction (CC60R)
- Brick paving
- Hire and rental industry
- Paving and landscaping

OPTIONAL EXTRAS

- Folding handle & wheels retro-fit for CC70RP
- Transport trolley [CWKTR]
- Multi purpose cover [MPCOVER]



	CC40HP	CC60RP	CC60HP	CC70RP	CC70HP	CC70YD	CC90HP	CC90RP
PLATE/SHOE SIZE (MM)	480 x 280MM	520 x 360MM	520 x 360MM	610 x 460MM	610 x 460MM	610 x 460MM	540 X 500MM	540x 500MM
FREQUENCY(VPM)	5400VPM	5800VPM	5800VPM	6500VPM	6500VPM	6500VPM	6000VPM	6000VPM
CENTRIFUGAL FORCE (KN)	9.8KN	12KN	12KN	18KN	18KN	18KN	16.5KN	16.5KN
EXCITER POSITION	FRONT	FRONT	FRONT	CENTRAL	CENTRAL	CENTRAL	FRONT	FRONT
MAIN FEATURE	FOLDING HANDLE & WHEELS	FOLDING HANDLE & WHEELS	FOLDING HANDLE & WHEELS	REVERSIBLE HANDLE	REVERSIBLE HANDLE	REVERSIBLE HANDLE	FRONT CLAMP FITS ISOLATION MAT	FRONT CLAMP FITS ISOLATION MAT
FUEL TYPE	PETROL	PETROL	PETROL	PETROL	PETROL	DIESEL	PETROL	PETROL
ENGINE MODEL	GX100	6HP EX17	GX200	6HP EX17	GX200	4.7HP L48N	GX200	6HP EX17
ENGINE BRAND	HONDA	ROBIN	HONDA	ROBIN	HONDA	YANMAR	HONDA	ROBIN
FUEL TANK	1.2L	3.6L	3.1L	3.6L	3.1L	2.4L	3.1L	3.6L
DECIBELS @ 7M	66DB	66DB	66DB	66DB	66DB	94DB	69DB	69DB
WEIGHT (DRY)	48KG	68KG	68KG	82KG	82KG	98KG	84KG	84KG
DIMENSIONS PACKAGE (LxWxH)	750 x 280 x 480MM	750 x 380 x 550MM	750 x 380 x 550MM	620 x 510 x 1250MM	620 x 510 x 1250MM	620 x 510 x 1250MM	620 x 510 x 1250MM	620 x 510 x 1250MM
MANUFACTURERS WARRANTY	2 YEARS	2 YEARS	2 YEARS	2 YEARS	2 YEARS	2 YEARS	2 YEARS	2 YEARS

CROMMELINS PETROL POWER TROWEL

The Crommelins Petrol Power Trowellers set the standard for concrete trowelling machines. Operator friendly, well balanced and easy to maintain, these machines are the choice of concreters Australia wide.

OPTIONAL EXTRAS

- Multi purpose cover [MPCOVER]
- Honda powered
- Floor pan
- Diesel Powered

STANDARD FEATURES

- Smooth performance and stable handling
- Cut bar with ergonomic handles offers easily adjustable control
- Handy holder for mobile phone, water bottle, or other accessories
- 'Dead-mans' safety switch
- Blade guard with blade access gate for easy blade changes and cleaning
- Heavy duty lifting bar
- Assembled and tested in Australia
- Two year manufacturer's warranty

IDEAL FOR

- Concrete slabs and tilt panels
- House pads
- Hire and rental



	CPT24RP	CPT34RP	CPT34HP	CPT40RP	CPT40HP
TROWELLER SIZE (INCH & MM)	24" (610MM)	34" (860MM)	34" (860MM)	40" (1015MM)	40" (1015MM)
MAIN FEATURE	SMALL JOBS, FITS SMALL/TIGHT AREAS & PATHWAYS, SIDE-HOUSE LANEWAYS	MEDIUM SIZED JOBS, FULLY ADJUSTABLE HANDLE, BOTTLE HOLDER	MEDIUM SIZED JOBS, FULLY ADJUSTABLE HANDLE, BOTTLE HOLDER	MEDIUM JOBS, FULLY ADJUSTABLE HANDLE, BOTTLE HOLDER	MEDIUM JOBS, FULLY ADJUSTABLE HANDLE, BOTTLE HOLDER
ENGINE MODEL	6HP EX17	6HP EX17	GX200	6HP EX17	GX200
ENGINE BRAND	ROBIN	ROBIN	HONDA	ROBIN	HONDA
FUEL TANK	3.6L	3.6L	3.1L	3.6L	3.1L
DECIBELS @ 7M	66db	66db	66DB	66db	66DB
WEIGHT (DRY)	50KG	75KG	75KG	78KG	78KG
DIMENSIONS (LxWxH)	1200 x 800 x 900MM	1500 x 940 x 1030MM	1500 x 940 x 1030MM	1650 x 1070 x 1010MM	1650 x 1070 x 1010MM
MANUFACTURERS WARRANTY	2 YEARS	2 YEARS	2 YEARS	2 YEARS	2 YEARS

CROMMELINS DIESEL POWER TROWEL

Crommelins diesel powered trowel machines are well balanced and are the perfect machine when diesel powered has to be used. Particularly on mine sites or in no-spark job sites.

STANDARD FEATURES


- Soft grip handle
- Fast travel speed for increased productivity
- Easy to reach throttle control
- Lifting hook/bar
- Assembled and tested in Australia
- Two year manufacturer's warranty
- Lifting hook

IDEAL FOR

- Concrete tilt panels
- Mining & diesel related jobs
- Hire and rental

OPTIONAL EXTRAS

- Multi purpose cover [MPCOVER]
- Floor pan

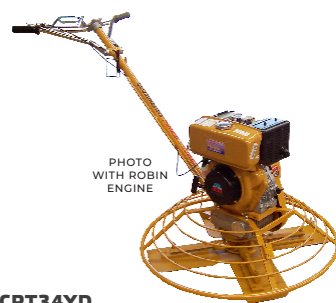

CPT34YD

TROWELLER SIZE	34" (860MM)
MAIN FEATURE	MEDIUM JOBS, FULLY ADJUSTABLE HANDLE, BOTTLE HOLDER
ENGINE MODEL	4.7HP L48N (RECOIL START)
ENGINE BRAND	YANMAR
FUEL TANK	2.4L
DECIBELS @ 1M	94db @ 1M
WEIGHT (DRY)	91KG
DIMENSIONS (LxWxH)	1500 x 940 x 1030MM
MANUFACTURERS WARRANTY	2 YEARS



CPT40YD

TROWELLER SIZE	40" (1015MM)
MAIN FEATURE	LARGE JOBS, FULLY ADJUSTABLE HANDLE, BOTTLE HOLDER
ENGINE MODEL	4.7HP L48N (RECOIL START)
ENGINE BRAND	YANMAR
FUEL TANK	2.4L
DECIBELS @ 1M	94db @ 1M
WEIGHT (DRY)	93KG
DIMENSIONS (LxWxH)	1650 x 1070 x 1010MM
MANUFACTURERS WARRANTY	2 YEARS

CROMMELINS DRIVE UNITS

Crommelins Drive Units suit most makes of 3 dog drive flexible shaft concrete vibrators and pumps and come diesel or petrol powered. All models feature a sled mounted frame, which enables use on any surface.

OPTIONAL EXTRAS

- Electric start
- Mine specification- DIESEL ONLY
- Long range fuel tank
- Emergency stop- ELECTRIC START ONLY
- Central lifting bar/hook

STANDARD FEATURES

- Drives 2" Flexible drive submersible pumps [FP2T & FP2TA]
- Drives vibrator Shafts
- Rubber mounted sub-frame between engine and HD frame to ensure reduced vibration
- Sled mounted frame which enables usage on any surface
- Full heavy duty protective roll frame
- Two year manufacturer's warranty

IDEAL FOR

- Power source to drive flex pumps
- Power source to drive concrete vibrator shafts
- Hire and rental
- Civil
- Construction



	DU60HP	DU60RP	DU47YDE	DU10YDE
VIBRATORY SHAFTS (UP TO)	65MM	65MM	65MM	75MM
PUMP SHAFTS (UP TO)	50MM	50MM	50MM	75MM
FUEL TYPE	PETROL	PETROL	DIESEL	DIESEL
STARTING SYSTEM	RECOIL START	RECOIL START	ELECTRIC START	ELECTRIC START
ENGINE MODEL	GX200	6HP EX17	4.7HP L48	10HP L100
ENGINE BRAND	HONDA	ROBIN	YANMAR	YANMAR
FUEL TANK	3.1L	3.6L	2.4L	5.4L
DECIBELS @ 7M	66db	66db	94db @ 1M	97db @ 1M
WEIGHT (DRY)	32KG	32KG	50KG	103KG
DIMENSIONS (LxWxH)	460 x 465 x 540	460 x 465 x 540	600 x 510 x 550MM	850 x 510 x 650MM
DIMENSIONS PACKAGE (LxWxH)	500 x 500 x 550MM	500 x 500 x 550MM	770 x 530 x 560MM	950 x 530 x 660MM
MANUFACTURERS WARRANTY	2 YEARS	2 YEARS	2 YEARS	2 YEARS

CROMMELINS VIBRATORY PRODUCTS

Available in 28, 38, 45 and 60mm vibrator shaft sizes these attach to '3 dog' drive units and are for fast, effective compaction for concrete pours in footings and formwork.

STANDARD FEATURES

- Strong, durable shafts for demanding jobs
- Two piece oil seals double the protection from grease seeping into the rotary head and reducing power
- High tension spring coupling between inner cable and rotor provides better vibration and longer life
- Protective spirals on both ends of the shaft minimises kinking and damage
- High quality inner cable and multilayered outer casing
- 'Flats' on removable parts makes servicing quick and easy
- Quality self aligning double row ball bearings are used to withstand high loadings

IDEAL FOR


- Stairways
- Footings
- Slabs

OPTIONAL EXTRAS

- 9.0m length [excludes JV28]

EXTENSIONS

- 3 metre FPEXT3
- 6 metre FPEXT6

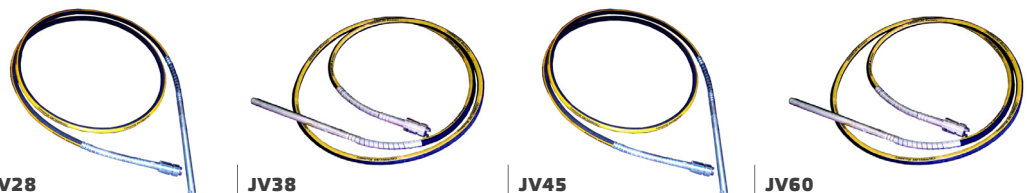

	JV28	JV38	JV45	JV60
SHAFTS SIZE (MM)	28MM	38MM	45MM	60MM
SHAFT LENGTH (M)	6M	6M	6M	6M
FREQUENCY (VPM)	13500VPM	13500VPM	13500VPM	13500VPM
WEIGHT (DRY)	16KG	16KG	21.5KG	21.5KG
DIMENSIONS (LxWxH)	6000 x 25 x 28MM	6000 x 38 x 38MM	6000 x 45 x 45MM	6000 x 60 x 60MM

CROMMELINS PORTABLE VIBRATOR

The 45mm Crommelins Portable Vibrator will do a number of jobs that could only be done by larger drive units and shafts. The portability and weight means that this unit is easy to use and saves using a heavy drive unit. It is ideal for footings, stairways and footpaths.

STANDARD FEATURES

- Genuine Honda 4-stroke engine
- Steel nose
- Throttle control on shaft with soft grip handle for low vibration
- Proportionately balanced design and lightweight
- Anti-roll bar to protect the engine from damage in transit.
- Full length steel reinforcing spiral which provides increased strength to the poker hose
- Two year manufacturer's warranty



	CV45HP
SHAFT SIZE (MM)	45MM
FREQUENCY (VPM)	9000VPM
FUEL TYPE	PETROL
ENGINE MODEL	1.3HP GX35
ENGINE BRAND	HONDA
FUEL TANK	0.65L
DECIBELS @ 7M	69,5db
WEIGHT (DRY)	11KG
DIMENSIONS PACKAGE (LxWxH)	1117 x 292 x 358MM
MANUFACTURERS WARRANTY	2 YEARS

CUTTING & DRILLING

CROMMELINS ELECTRIC BRICK SAW

This robust brick saw is designed with the operator in mind, including features to ensure ease of use and safe transport. It will make easy work of cutting your bricks and pavers. Therefore, it's perfect for building and construction, hire and rental, contractors and DIY.

STANDARD FEATURES

- Extendable handles for lifting and transport
- Height adjustable spring loaded cutting head with locking option
- Sliding tray with rail system
- Heavy duty mitre guide
- Motor capacitor box crash plate
- Large never-flat, puncture proof wheels
- Foot control pedal
- Detachable stand for portability
- 14 inch blade capacity (350mm)
- Assembled and tested in Australia
- One year manufacturer's warranty

IDEAL FOR

- Hire and rental
- Contractor
- DIY
- Building and construction

OPTIONAL EXTRAS

- Diamond blades

	CBS350CE
BLADE SIZE (MM)	350MM
CUTTING DEPTH (MM)	125MM
CUTTING TABLE SIZE (MM)	860 x 440MM
SLIDING TRAY SIZE (MM)	280 x 460MM
MOTOR WATTAGE (W)	1700W
MOTOR BRAND	CMG
SHAFT SPEED (RPM)	2880RPM
WEIGHT (DRY)	109KG (INCLUDING STAND)
DIMENSIONS (LxWxH)	1200 x 780 x 1620MM
MANUFACTURERS WARRANTY	1 YEAR



GÖLZ TILE SAWS

This professional rail tile saw with a durable low maintenance guide rail system comes standard with a small electric pump located in the water catchment tray. It is excellent for precision cutting and has extensions to the tray for cutting large tiles.

IDEAL FOR

- Hire and rental
- Tilers
- Building and construction
- DIY

STANDARD FEATURES

- Water cooled cutting blade
- Adjustable tilt saw head & rail to cut 90° & 45°
- Adjustable cutting length
- Electric water pump with quick coupling, easy for changing the pump
- Removable water tub and cutting table for easy cleaning
- Removable blade guard for easy blade changes
- Foldable legs for transport and storage
- Rear wheels for transport onsite
- One year manufacturer's warranty
- Comes with 200 or 250mm blade (depends on model)

OPTIONAL EXTRAS

- Diamond blades



TS200

BLADE SIZE (MM)	200MM
CUTTING DEPTH (MM)	40MM
CUTTING LENGTH (MM)	560MM
CUTTING TABLE SIZE (MM)	720 x 480MM
BLADE FLANGE SIZE Ø (MM)	64MM
ARBOR HOLE	25.4MM
MOTOR WATTAGE (W)	1300W
SHAFT SPEED (RPM)	2800RPM
WEIGHT (DRY)	57KG
DIMENSIONS (LxWxH)	1220 x 540 x 1299MM
MANUFACTURERS WARRANTY	1 YEAR



TS250

BLADE SIZE (MM)	250MM
CUTTING DEPTH (MM)	65MM
CUTTING LENGTH (MM)	980MM
CUTTING TABLE SIZE (MM)	1140 x 480MM
BLADE FLANGE SIZE Ø (MM)	64MM
ARBOR HOLE	25.4MM
MOTOR WATTAGE (W)	1300W
SHAFT SPEED (RPM)	2800RPM
WEIGHT (DRY)	72KG
DIMENSIONS (LxWxH)	1640 x 540 x 1299MM
MANUFACTURERS WARRANTY	1 YEAR

GÖLZ FLOOR SAWS

These German designed compact road saws are made for asphalt and concrete cutting. The Gölz floor saws are ideal for small road repair jobs and small services. If you are in the building/construction or civil works fields, there is a GÖLZ product to suit your need.

STANDARD FEATURES

- Adjustable anti-vibration handles for operator comfort
- Cutting depth adjustment by handwheel with depth indicator
- Push style cutting
- Front cutting guide
- Parking break with big rear wheels
- Lifting hook
- 25L water tank
- Durable Poly-V belt for an optimum power transmission

OPTIONAL EXTRAS

- Diamond blades
- Honda powered [FS125]



	FS125
BLADE SIZE (MM)	350MM
CUTTING DEPTH (MM)	120MM
BLADE SHAFT SIZE (MM)	25.4MM
WATER TANK (L)	25L
HAND VIBRATION	4.5 M/S ²
MOTOR MODEL	7HP EX21
MOTOR BRAND	ROBIN
SHAFT SPEED (RPM)	2730RPM
WEIGHT (DRY)	84KG
DIMENSIONS (LxWxH)	650 x 450 x 1000MM
MANUFACTURERS WARRANTY	1 YEAR

IDEAL FOR

- Hire and rental
- Contractor
- Road repairs
- Cutting trenches for piping

OPTIONAL EXTRAS:

- Honda powered [H] - FS125 only
- Diamond blades



	FS175
BLADE SIZE (MM)	450MM
CUTTING DEPTH (MM)	165MM
BLADE SHAFT SIZE (MM)	25.4MM
WATER TANK (L)	25L
HAND VIBRATION	4.5 M/S ²
MOTOR MODEL	14HP EX40
MOTOR BRAND	ROBIN ONLY
SHAFT SPEED (RPM)	2300RPM
WEIGHT (DRY)	126KG
DIMENSIONS (LxWxH)	1220 x 491 x 1160MM
MANUFACTURERS WARRANTY	1 YEAR

PRESSURE CLEANERS

CHOOSING A PRESSURE WASHER

Crommelins petrol and diesel high-pressure washers are power packed to rapidly and effectively wipe out all the washing, degreasing, descaling and disinfecting problems that are part of every working day in commercial and industrial situations.

FOR THE HOME

- Strip paint flakes off walls and garden furniture
- Remove stains and mould from brick paving and limestone
- Wash grease and oil from driveways
- Clean gutters and pergolas.

FOR INDUSTRY

- Clean agricultural equipment and other machinery
- Remove paint flakes
- Wash grease and oil from workshops
- High pressure water cleaning.

PRESSURE WASHER TERMS

- **PSI** - Pounds per square inch which determines how much pressure is directly applied on the surface being cleaned.
- **LPM** - Litres per minute (or L/MIN)
- **Water Flow** - The maximum amount of water that the pump produces.
- **Purge** - A method of eliminating air from a pressure washer for constant pressure.

CUSTOM OPTIONS (SOME MODELS)

- Electric start
- Honda powered
- Mine specification
- Long range fuel tank
- Bunding
- Fire extinguisher
- Emergency safety stop
- Lockable battery isolator
- Lockable recoil start
- Plant numbering
- Anderson jump start
- Custom frame colouring

CROMTECH PRESSURE CLEANER

This Cromtech pressure cleaner is built with an AR brass head axial pump for all round cleaning at home, on the farm and in the workplace. This model is powered by a Robin petrol engine for performance and longevity.

STANDARD FEATURES

- Quality gun and steel lance
- Quick-connect hose couplings
- Detergent injector nozzles
- AR brass head axial pump
- Detergent hose pickup tube & filter
- Trolley frame with hose holders, gun hook and front foot
- Removable handle for storage and transport
- Rubber foot to keep machine stable
- Pneumatic wheels
- Additional inline water filter
- One year manufacturer's warranty
- Three year Robin engine warranty



IDEAL FOR

- Light trade
- Cleaning moss/dirt from paving
- Shop fronts and awnings
- Mud from flooded areas
- Paint from fences

OPTIONAL ACCESSORIES

- Turbo nozzle
- Hose extension
- 15" Surface cleaner (2700psi models)

	TPV2700RP
MAX. RATED PRESSURE (PSI)	2700PSI
MAX. RATED BAR (BAR)	186BAR
WATER FLOW (L/MIN)	10L
HOSE LENGTH & TYPE	10M HOSE
PRESSURE PUMP TYPE	AR BRASS HEAD AXIAL PUMP
ENGINE MODEL	6HP EX17
ENGINE BRAND	ROBIN
FUEL TANK	3.6L
DECIBELS @ 7M	66db
WEIGHT (DRY)	36KG
DIMENSIONS (LxWXH)	780 x 550 x 920MM
MANUFACTURERS WARRANTY	1 YEARS

CROMMELINS PRESSURE CLEANERS

This extremely popular range of pressure cleaners are built with AR Pumps for the light industrial market. Assembled and tested in Australia, the CPV range are powered by Robin engines for performance and longevity.

IDEAL FOR

- Light trade and agricultural use
- Cleaning moss and dirt from paving
- Shop fronts and awnings

STANDARD FEATURES

- Quality gun and steel lance
- Quick-connect hose couplings
- 4 x Spray nozzles (0° / 15° / 40°/ Detergent)
- Detergent hose pickup tube & filter
- Trolley frame with hose holders, gun hook and front bumper
- Removable handle and bumper for transport
- Front bumper bar to protect the pump
- Rubber front foot to keep machine stable
- Pneumatic wheels
- Additional inline water filter
- One year pressure pump warranty
- Two year manufacturer's warranty

OPTIONAL ACCESSORIES

- Turbo nozzle
- Hose extension
- 15" Surface cleaner (2700psi models)
- 21" Surface spray [SC21] fits 3000psi+ models



	CPV2700RP	CPV3200RP	CPV4000RP
MAX. RATED PRESSURE (PSI)	2700PSI	3200PSI	4000PSI
MAX. RATED BAR (BAR)	186BAR	220BAR	275BAR
WATER FLOW (L/MIN)	11.4L	14.0L	15.0L
HOSE LENGTH & TYPE	10M HOSE	10M HOSE	15M HOSE
PRESSURE PUMP TYPE	AR TRIPLEX	AR TRIPLEX	AR TRIPLEX
ENGINE MODEL	7HP EX21	9HP EX27	14HP EX40
ENGINE BRAND	ROBIN	ROBIN	ROBIN
FUEL TANK	3.6L	6.0L	7.0L
DECIBELS @ 7M	68db	74db	72db
WEIGHT (DRY)	43KG	48KG	67KG
DIMENSIONS (LxWXH)	670 x 520 x 960MM	720 x 520 x 960MM	920 x 600 x 960MM
MANUFACTURERS WARRANTY	2 YEARS	2 YEARS	2 YEARS

CROMMELINS PRESSURE CLEANERS (HONDA)

This extremely popular range of pressure cleaners are built with AR Pumps for the light industrial market. Assembled and tested in Australia, the CPV range can be powered by a customised Honda engine for performance and longevity.

IDEAL FOR

- Light trade and agricultural use
- Cleaning moss and dirt from paving
- Shop fronts and awnings

STANDARD FEATURES

- Quality gun and steel lance
- Quick-connect hose couplings
- 4 x Spray nozzles (0° / 15° / 40°/ Detergent)
- Detergent hose pickup tube & filter
- Trolley frame with hose holders, gun hook and front bumper
- Removable handle and bumper for transport
- Front bumper bar to protect the pump
- Rubber front foot to keep machine stable
- Pneumatic wheels
- Additional inline water filter
- One year pressure pump warranty
- Two year manufacturer's warranty

CUSTOM OPTIONS

- Turbo nozzle
- Hose extension
- 15" Surface cleaner (2700psi models)
- 21" Surface spray [SC21] fits 3000psi+ models



	CPV2700HP	CPV3200HP	CPV4000HP
MAX. RATED PRESSURE (PSI)	2700PSI	3200PSI	4000PSI
MAX. RATED BAR (BAR)	186BAR	220BAR	275BAR
WATER FLOW (L/MIN)	11.4L	14.0L	15.0L
HOSE LENGTH & TYPE	10M HOSE	10M HOSE	15M HOSE
PRESSURE PUMP TYPE	AR TRIPLEX	AR TRIPLEX	AR TRIPLEX
ENGINE MODEL	GX200	GX270	GX390
ENGINE BRAND	HONDA	HONDA	HONDA
FUEL TANK	3.1L	5.3L	7.0L
DECIBELS @ 7M	68db	74db	72db
WEIGHT (DRY)	43KG	48KG	67KG
DIMENSIONS (LxWXH)	670 x 520 x 960MM	720 x 520 x 960MM	920 x 600 x 960MM
MANUFACTURERS WARRANTY	2 YEARS	2 YEARS	2 YEARS

CROMMELINS PRESSURE CLEANERS PETROL

Crommelins have produced a pressure cleaner available in 2000psi, 3000psi or 4000psi. Whether required for the smaller, simpler jobs like washing down dusty & dirty machinery or for larger jobs and constant use, this pressure cleaner will suit your needs.

IDEAL FOR

- Hire and rental
- Agriculture
- Mud from flooded areas
- Paint from fences

STANDARD FEATURES

- Genuine Robin industrial engine
- AR Triplex pump with 2:1 reduction gearbox
- Adjustable pressure regulator
- Detergent injector nozzle
- Heavy duty gun with twin lance
- 10m high pressure hose
- Gun and hose holder
- Rubber isolated engine mounting plate
- Central lifting hook
- 4 x Pneumatic wheels
- Australian fabricated heavy duty galvanised roll frame
- One year pressure pump warranty
- Two year manufacturer's warranty

OPTIONAL ACCESSORIES

- Electric start
- Turbo nozzle
- Hose extension
- Custom colouring
- 21" Surface spray [AF210] fits 3000psi+ models



	CPC3000SP	CPH3000RP	CPC4000RP
MAX. RATED PRESSURE (PSI)	3000PSI	3000PSI	4000PSI
MAX. RATED BAR (BAR)	205BAR	205BAR	275BAR
WATER FLOW (L/MIN)	15L	15L	15L
HOSE LENGTH & TYPE	10M HOSE	10M HOSE	10M HOSE
PRESSURE PUMP TYPE	AR TRIPLEX	AR TRIPLEX	AR TRIPLEX
ENGINE MODEL	14HP EX40	14HP EX40	14HP EX40
ENGINE BRAND	ROBIN	ROBIN	ROBIN
FUEL TANK	7.0L	6.1L	7.0L
DECIBELS @ 7M	72db	72db	72db
WEIGHT (DRY)	83KG	83KG	85KG
LANCE & SPRAY GUN	TWIN LANCE HD GUN	SINGLE LANCE HD GUN	TWIN LANCE HD GUN
MANUFACTURERS WARRANTY	2 YEARS	2 YEARS	2 YEARS

CROMMELINS PRESSURE CLEANERS DIESEL

These diesel pressure cleaners are available in 3000psi and are powered by a genuine Yanmar diesel engine.

STANDARD FEATURES

- Genuine Yanmar industrial engine with electric start
- AR Triplex pump with 2:1 reduction gearbox
- Detergent injector nozzle
- Adjustable pressure regulator
- 10m high pressure hose
- Heavy duty gun with twin lance
- Gun and hose holder
- Australian fabricated heavy duty galvanised roll frame
- Central lifting hook
- Rubber isolated engine mounting plate
- 4 x Pneumatic wheels
- One year pressure pump warranty
- Two year manufacturer's warranty



IDEAL FOR

- Hire and rental
- Mining
- Agriculture
- Mud from flooded areas

OPTIONAL ACCESSORIES

- Mine specification
- Turbo nozzle
- Hose extension
- Custom colouring
- 21" Surface spray [SC21] fits 3000psi+ models
- Hose reel

MINE SPECIFICATION

OPTION INCLUDES

- Emergency stop
- Battery isolator
- Bunding tray
- Fire extinguisher

	CPC3000YDE
MAX. RATED PRESSURE (PSI)	3000PSI
MAX. RATED BAR (BAR)	205BAR
STARTING SYSTEM	ELECTRIC START
WATER FLOW (L/MIN)	15L
HOSE LENGTH & TYPE	10M HOSE
PRESSURE PUMP TYPE	AR TRIPLEX
ENGINE MODEL	10HP L100
ENGINE BRAND	YANMAR
FUEL TANK	5.4L
DECIBELS @ 7M	97db @ 1M
WEIGHT (DRY)	115KG
MANUFACTURERS WARRANTY	2 YEARS

PRESSURE CLEANER ACCESSORIES

TURBO NOZZLES

- Suits all models



15" SURFACE CLEANER (HKJ1501A)

- Suits 2700psi models



HIGH PRESSURE HOSE

- Suits all models (up to 4000psi)



21" SURFACE CLEANER (AF2101)

- Suits 3000psi+ models
- 14KG



CPV NOZZLES

- Pencil Jet
- Fan Jet 15
- Fan Jet 40
- Detergent Nozzle



PUMPS

CHOOSING YOUR PUMP

Crommelins Machinery has a large range of pumps to meet all your pumping needs. From small portable pumps, fire fighting pumps, large capacity pumps to pumps for on-site construction and heavy duty pumping work.

STANDARD FEATURES

- Construction grade quality
- Low maintenance and long engine life
- Assembled and tested in Australia

PUMP TERMS

- **Total Head** - The total height in meters liquid can be pumped to
- **Max. Suction** - The maximum depth liquid can be sucked at below the level of the pump
- **Trash** - Allows pumping in muddy/sandy water and will also pump solids
- **Clean Water** - For clear water pumping only
- **Poly** - For pumping waste water, chemicals, sea water, etc.
- **Self Priming** - Requires no water for subsequent pumping operation once initial pumping is done.

CUSTOMISE YOUR PUMP

Crommelins Machinery can customise pumps to suit your needs.

OPTIONAL EXTRAS

- Long range fuel tank
- Mine specification- DIESEL ONLY
- Electric start
- Fire extinguisher
- Safety stop
- Custom colouring
- Galvanising

OPTIONAL ACCESSORIES

- **Hose Kit (FFHOSEK)** - suits all fire fighting pumps
- **Pump Role Frame (PURF1)** - optional extra for fire fighting petrol pumps
- **Fire Fighting Pump Trolley (PPKR1)** - Suits models FF150RP, FF150RP7, FT150RP, and FT150RP7
- **Lay Flat Hose 2" (FP2HOSEK)** - Ideal for agriculture, general water transfer, building and construction and flood relief

PRE-SEASON PUMP MAINTENANCE

Before the bushfire season arrives or when you need to use your pump, it is wise to check your pump unit to make sure it is ready for service.






MAINTENANCE TIPS

1. If not already done (at end of season) change the engine oil.
2. Drain any fuel left in the tank and fill with fresh petrol. Loosen the fuel bowl retaining bolt on carburettor and allow fresh fuel to flush through. Tighten the bolt.
3. Remove spark plug and put a couple of squirts or pour a little engine oil in the cylinder. Pull motor over three or four times. Remove plug and rinse in petrol and replace.
4. Fill pump unit with water and start pump in normal fashion. The engine can be run for 1-2 minutes without connecting to water tank as long as the pump is full of water.

If the motor does not start or run properly (lack of compression/blocked carburettor) it will be necessary to have the unit checked by your local service agent.

*Note: Service should be done in a workshop (clean area), not an open field.

PUMP CURVES

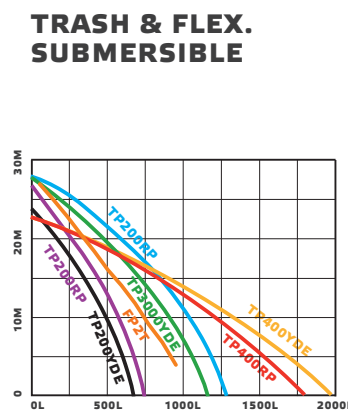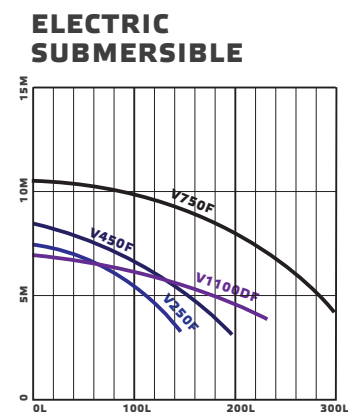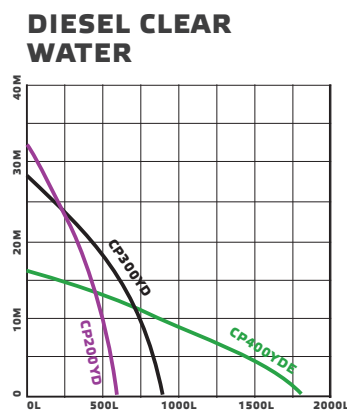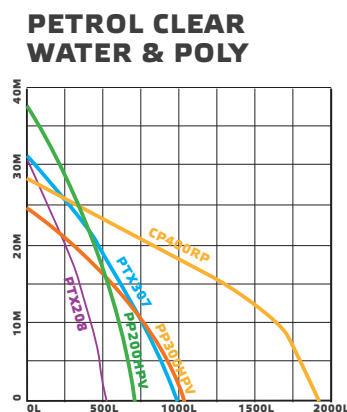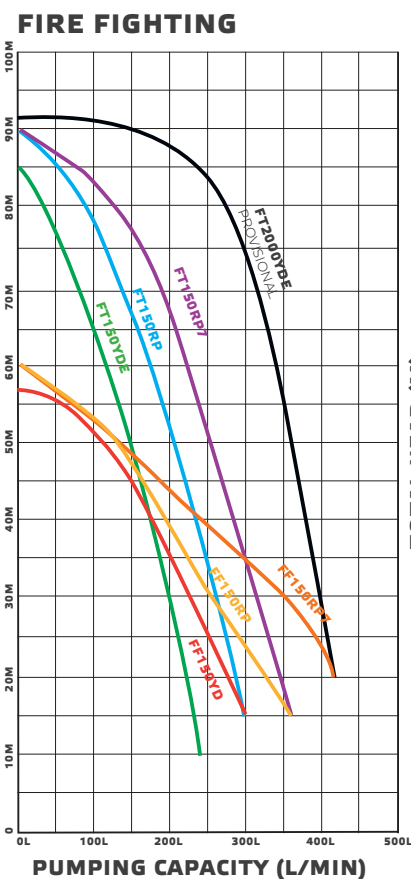

CROMMELINS PETROL FIRE FIGHTING PUMPS

These Fire Fighting pumps are known for their reliability, durability and versatility. They are ideal for fire fighting, water transfer, washing down farm machinery and many other jobs that require water at pressure. They come in either single or twin impeller.

STANDARD FEATURES

- 1 ½" Inlet (40mm)
- 1 ½" Outlet and 2 x 1" Outlet
- Bolt on replaceable suction and discharge ports
- Metal (not plastic) delivery outlet caps
- Cast iron diffuser increases pump life
- Cast aluminium impeller
- Cast aluminium pump body
- Two years manufacturer's warranty
- Assembled and tested in Australia

IDEAL FOR

- Fire fighting
- Water transfer
- Washing down machinery
- Agriculture
- Shires and councils

OPTIONAL EXTRAS

- Electric start with AGM battery
- Trolley kit (recoil start only)
- Honda powered
- 2" Inlet / Outlets
- Hose kits available
- Viton seals

PUMP CURVE: REFER TO PAGE 39



	FF150RP	FF150HP	FF150RP7	FT150RP	FT150HP	FT150RP7
WATER FLOW (L/MIN)	360L	360L	420L	300L	300L	360L
WATER FLOW (L/HR)	21,600L	21,600L	25,200L	18,000L	18,000L	21,600L
TOTAL HEAD (M)	60M	60M	50M	90M	90M	90M
MAX. SUCTION (M)	8M	8M	8M	8M	8M	8M
IMPELLER	SINGLE	SINGLE	SINGLE	TWIN	TWIN	TWIN
ENGINE MODEL	6HP EX17	GX200	7HP EX21	6HP EX17	GX200	7HP EX21
ENGINE BRAND	ROBIN	HONDA	ROBIN	ROBIN	HONDA	ROBIN
FUEL TANK	3.6L	3.1L	3.6L	3.6L	3.1L	3.6L
DECIBELS @ 7M	66db	66db	68db	66db	66db	68db
WEIGHT (DRY)	24KG	25KG	25KG	30KG	31KG	32KG
DIMENSIONS (LxWxH)	510 x 440 x 440MM	510 x 440 x 440MM	510 x 440 x 440MM	510 x 440 x 440MM	510 x 440 x 440MM	510 x 440 x 440MM
MANUFACTURER'S WARRANTY	2 YEARS	2 YEARS	2 YEARS	2 YEARS	2 YEARS	2 YEARS

CROMMELINS DIESEL FIRE FIGHTING PUMP

These Fire Fighting pumps are known for their reliability, durability and versatility. They are ideal for firefighting, water transfer, washing down farm machinery and many other jobs that require water at pressure. They come in either single or twin impeller.

STANDARD FEATURES:

- 1 ½" Inlet (40mm)
- 1 ½" Outlet and 2 x 1" Outlet
- Bolt on replaceable suction port
- Metal (not plastic) delivery outlet caps
- Cast iron diffuser increases pump life
- Cast aluminium impeller
- Cast aluminium pump body
- Two years manufacturer's warranty
- Assembled and tested in Australia

IDEAL FOR

- Fire fighting
- Water transfer
- Washing down machinery
- Agriculture
- Shires and councils



OPTIONAL EXTRAS

- Electric start with AGM battery
- Mine specification
- 2" Inlet / Outlets
- Hose kits available
- Viton seals

PUMP CURVE: REFER TO PAGE 39

	FF150YD	FT150YDE	FT220YDE
WATER FLOW (L/MIN)	300L	240L	420L
WATER FLOW (L/HR)	18,000L	14,400L	25,200L
TOTAL HEAD (M)	57m	85M	93M
MAX. SUCTION (M)	8M	8M	8M
IMPELLER	SINGLE	TWIN	TWIN
STARTING SYSTEM	RECOIL START	ELECTRIC START	ELECTRIC START
ENGINE MODEL	4.7HP L48	7.0hp L70	10HP L100
ENGINE BRAND	YANMAR	YANMAR	YANMAR
FUEL TANK	2.4L	3.3L	5.4L
DECIBELS @ 7M	94db @ 1M	81db	83db
WEIGHT (DRY)	51KG	64KG	77KG
DIMENSIONS (LxWxH)	530 x 420 x 490MM	800 x 510 x 600MM	980 x 530 x 660MM
MANUFACTURER'S WARRANTY	2 YEARS	2 YEARS	2 YEARS

CROMTECH FIRE FIGHTING PUMPS

These Fire Fighting pumps are known for their reliability, durability and versatility. They are ideal for fire fighting, water transfer, washing down farm machinery and many other jobs that require water at pressure. They come in either single or twin impeller. Our Cromtech products come standard with a one year warranty with Australia wide support and service network.

STANDARD FEATURES

- 1 ½" Inlet (40mm) and 2 x 1" Outlet
- Bolt on replaceable suction and discharge ports
- Metal (not plastic) delivery outlet caps
- Cast iron diffuser increases pump life
- Cast aluminium impeller
- Cast aluminium pump body
- One years manufacturer's warranty
- Assembled and tested in Australia

IDEAL FOR

- Fire fighting
- High-pressure water pumping
- Water transfer
- Emptying or filling

OPTIONAL EXTRAS

- Trolley kit (recoil start only)
- Honda powered
- 2" Inlet / Outlets
- Hose kits available
- Viton seals

PUMP CURVE: REFER TO PAGE 39



	TFF150	TFT150DE
INLET (IN)	1.5"	1.5"
OUTLET (IN)	1 x 1.5 and 2 x 1"	1 x 1.5" and 2 x 1"
WATER FLOW (L/MIN)	370L	250L
WATER FLOW (L/HR)	21,600L	15,000L
TOTAL HEAD (M)	50M	75M
MAX. SUCTION (M)	8M	8M
STARTING SYSTEM	RECOIL START	ELECTRIC START
ENGINE MODEL	CT200DP	5.3HP DIESEL
ENGINE BRAND	CROMTECH	CROMTECH
FUEL TANK	3.6L	3.5L
WEIGHT (DRY)	25KG	61KG
DIMENSIONS (LxWxH)	-	658 x 450 x 450MM
MANUFACTURER'S WARRANTY	1 YEAR	1 YEAR

CROMMELINS CLEAR WATER PUMPS PETROL

These are ideal for general purpose pumping, for transferring large volumes of water such as from a dam to a water tank. They are also popular on water trucks for spray bars and tree watering operations.

STANDARD FEATURES

- Genuine Robin engine
- Centrifugal self-priming pump for fast and efficient pumping
- Direct coupled pump ensures efficient, economical operation
- Cast iron impeller and inner casing
- Two year manufacturer's warranty

IDEAL FOR

- Hire and rental
- General purpose water transfer
- Agriculture

OPTIONAL EXTRAS

- Electric start with AGM battery

PUMP CURVE: REFER TO PAGE 39



	PTX208	PTX307	CP400RP
INLET (IN)	2"	3"	4"
OUTLET (IN)	2"	3"	4"
WATER FLOW (L/MIN)	520L	1000L	1800L
WATER FLOW (L/HR)	31,200L	60,000L	108,000L
TOTAL HEAD (M)	32M	32M	28M
MAX. SUCTION (M)	8M	8M	8M
STARTING SYSTEM	RECOIL START	RECOIL START	RECOIL START
ENGINE MODEL	6HP EX17	6HP EX17	9HP EX27
ENGINE BRAND	ROBIN	ROBIN	ROBIN
FUEL TANK	3.6L	3.6L	6.1L
DECIBELS @ 7M	66db	66db	70db
WEIGHT (DRY)	25KG	28KG	45KG
DIMENSIONS (LxWxH)	470 x 344 x 414MM	527 x 368 x 417MM	610 x 425 x 565MM
MANUFACTURER'S WARRANTY	2 YEARS	2 YEARS	2 YEARS

CROMMELINS CLEAR WATER PUMPS DIESEL

These are ideal for general purpose pumping, for transferring large volumes of water such as from a dam to a water tank. They are also popular on water trucks for spray bars and tree watering operations.

STANDARD FEATURES

- Genuine Yanmar diesel engine
- Centrifugal self-priming pump for fast and efficient pumping
- Direct coupled pump ensures efficient, economical operation
- Water-resisting quality with mechanical seal
- Cast iron impeller and inner casing
- Two year manufacturer's warranty

IDEAL FOR

- Hire and rental
- General purpose water transfer
- Agriculture
- Mining
- Exploration

OPTIONAL EXTRAS

- CP300YD is available with Electric start with AGM battery (CP300YDE)

PUMP CURVE: REFER TO PAGE 39



PHOTO WITH ROBIN ENGINE



PHOTO WITH ROBIN ENGINE

	CP300YD	CP400YDE
INLET (IN)	3"	4"
OUTLET (IN)	3"	4"
WATER FLOW (L/MIN)	900L	1800L
WATER FLOW (L/HR)	54,000L	108,000L
TOTAL HEAD (M)	28M	25M
MAX. SUCTION (M)	8M	8M
STARTING SYSTEM	RECOIL START	ELECTRIC START ONLY
ENGINE MODEL	4.7HP L48N	6.7HP L70N
ENGINE BRAND	YANMAR	YANMAR
FUEL TANK	2.4L	3.3L
DECIBELS @ 1M	94db @ 1M	95db @ 1M
WEIGHT (DRY)	43.5KG	100KG
DIMENSIONS (LxWxH)	590 x 410 x 510MM	850 x 510 x 650MM
MANUFACTURER'S WARRANTY	2 YEARS	2 YEARS

CROMTECH PETROL CLEAR WATER PUMPS

These Cromtech petrol-powered clear water pumps are for general purpose water transfer. This includes transferring water from ponds, dams and water tanks quickly and efficiently.

STANDARD FEATURES

- Mechanical seal (ceramic carbon)
- Petrol and diesel powered
- Recoil start
- 1 Year Cromtech warranty

ACCESSORIES

- Tool kit
- Hose-tails and strainer

IDEAL FOR

- Water transfer
- Emptying ponds, dams and large water tanks
- Agricultural and general purpose



	CTP301	CTD301E
INLET (IN)	3"	3"
OUTLET (IN)	3"	3"
WATER FLOW (L/MIN)	900L	833L
WATER FLOW (L/HR)	54,000L	49,980L
TOTAL HEAD (M)	30M	25M
MAX. SUCTION (M)	7M	8M
STARTING SYSTEM	RECOIL START	ELECTRIC START
ENGINE TYPE	4-STROKE, 6HP	5.3HP DIESEL
ENGINE BRAND	CROMTECH	CROMTECH
FUEL TANK	2.6L	12.0L
WEIGHT (DRY)	26KG	66KG
DIMENSIONS (LxWxH)	530 x 415 x 445MM	550 X 500 x 656MM
MANUFACTURER'S WARRANTY	1 YEAR	1 YEAR

CROMMELINS POLY PUMPS

The Crommelins Machinery Poly Pumps are durable and reliable pumps for applications where chemicals, waste water, salt water and mild caustic liquids have to be pumped. Constructed of corrosion-resistant materials, it comes with 316 stainless steel fasteners throughout and Viton seals.

STANDARD FEATURES

- Viton seals for pumping chemical liquids
- Corrosion resistant poly pump
- Heavy duty roll frame
- 2 Years manufacturer's warranty
- Assembled and tested in Australia
- Honda or Yanmar engine
- Viton seals

IDEAL FOR

- Chemicals and mild caustic liquids
- Waste water
- Salt water

OPTIONAL EXTRAS

- Electric start with AGM battery - Diesel only
- Mine specification- Diesel only

PUMP CURVE: REFER TO PAGE 39



	PP200HPV	PP300HPV	PP200YDV	PP300YDV
INLET (IN)	2"	3"	2"	3"
OUTLET (IN)	2"	3"	2"	3"
WATER FLOW (L/MIN)	730L	1059L	730L	1059L
WATER FLOW (L/HR)	43,800L	63,540L	43,800L	63,540L
TOTAL HEAD (M)	38M	25M	38M	25M
MAX. SUCTION (M)	8M	8M	8M	8M
STARTING SYSTEM	RECOIL START	RECOIL START	RECOIL START	RECOIL START
ENGINE MODEL	6.5HP GX200	6.5HP GX200	4.7HP L48N	4.7HP L48N
ENGINE BRAND	HONDA	HONDA	YANMAR	YANMAR
FUEL TYPE	PETROL	PETROL	DIESEL	DIESEL
FUEL TANK	3.1L	3.1L	2.4L	2.4L
DECIBELS @ M	68db @ 7M	68db @ 7M	94db @ 1M	94db @ 1M
WEIGHT (DRY)	28KG	38KG	52KG	65KG
DIMENSIONS (LxWxH)	530 x 420 x 490MM	730 X 485 X 610MM	530 X 420 X 490MM	730 X 485 X 610MM
MANUFACTURER'S WARRANTY	2 YEARS	2 YEARS	2 YEARS	2 YEARS

CROMMELINS TRASH PUMPS PETROL

Trash pumps handle larger solids and debris for heavy-duty de-watering applications. A trash pump uses deep impeller vanes with a large volute and pumps water containing suspended sticks, stones and debris without clogging or harming pump components.

STANDARD FEATURES

- Genuine Robin and Yanmar petrol engines
- Self-priming for fast and efficient pumping
- Silicon-carbon mechanical seal
- Cast iron impeller and inner casing
- Quick clean-out suction port provides easy maintenance and long service life
- Two years manufacturer's warranty
- Assembled and tested in Australia

IDEAL FOR

- Rental and hire
- General purpose de-watering
- Construction job site
- Agriculture

OPTIONAL EXTRAS

- Electric start with AGM battery

PUMP CURVE: REFER TO PAGE 39



	TP200RP	TP300RP	TP400RP
INLET (IN)	2"	3"	4"
OUTLET (IN)	2"	3"	4"
WATER FLOW (L/MIN)	750L	1300L	2000L
WATER FLOW (L/HR)	45,000L	78,000L	120,000L
TOTAL HEAD (M)	27M	28M	23M
MAX SOLIDS (MM)	20MM	30MM	30MM
MAX. SUCTION (M)	8M	8M	8M
STARTING SYSTEM	RECOIL START	RECOIL START	RECOIL START
ENGINE MODEL	6HP EX17	9HP EX27	12HP EX 35
ENGINE BRAND	ROBIN	ROBIN	ROBIN
FUEL TANK	3.6L	6.1L	7.0L
DECIBELS @ 7M	66db	69.5db	81db
WEIGHT (DRY)	35KG	49KG	72KG

CROMMELINS TRASH PUMPS DIESEL

Trash pumps handle larger solids and debris for heavy-duty de-watering applications. A trash pump uses deep impeller vanes with a large volute and pumps water containing suspended sticks, stones & debris without clogging or harming pump components.

STANDARD FEATURES

- Genuine Yanmar diesel engine
- Self-priming for fast and efficient pumping
- Silicon-carbon mechanical seal
- Cast iron impeller and inner casing
- Quick clean-out suction port provides easy maintenance and long service life
- Two years manufacturer's warranty
- Assembled and tested in Australia

IDEAL FOR

- Rental and hire
- General purpose de-watering
- Construction job site
- Mining
- Exploration

OPTIONAL EXTRAS

- Mine specification
- Long range fuel tank
- 4 wheel kit

PUMP CURVE: REFER TO PAGE 39



MINESPEC WITH LONG RANGE FUEL TANK AND WHEEL KIT SHOWN



	TP300YDE	TP400YDE
INLET (IN)	3"	4"
OUTLET (IN)	3"	4"
WATER FLOW (L/MIN)	1170L	2000L
WATER FLOW (L/HR)	70,200L	120,000L
TOTAL HEAD (M)	25M	21M
MAX SOLIDS (MM)	30MM	30MM
MAX. SUCTION (M)	8M	8M
STARTING SYSTEM	ELECTRIC START	ELECTRIC START
ENGINE MODEL	6HP L70	10.0HP L100
ENGINE BRAND	YANMAR	YANMAR
FUEL TANK	3.3L	4.7L
DECIBELS @ 7M	94db @ 1M	76db
WEIGHT (DRY)	95KG	100KG

CROMTECH SUBMERSIBLE PUMPS

Constructed with stainless steel and cast iron, there is a pump to suit most applications. These pumps are ideal for pumping grey and clean water out of water tanks, pools, ponds, sewage and flooded areas.

OPTIONAL EXTRAS

- Hose kits available

STANDARD FEATURES

- Float switch (F) automatically turns pump on/off
- High quality bearing, seals
- Stainless motor shaft
- Single phase electric motor
- Overload protection
- 7m rope to lower/lift pump
- 10m long power cord
- Vortex impeller

IDEAL FOR

- Pools and ponds
- Flooded areas
- Sewage
- De-watering



	V250F	V450F	V750F	V1100DF
OUTLET (MM)	25 / 32 / 40MM	25 / 32 / 40 / 50MM	25 / 32 / 40 / 50MM	25 / 32 / 40 / 50MM
WATER FLOW (L/MIN)	150L	200L	300L	233L
WATER FLOW (L/HR)	9000L	12,000L	18,000L	13,980L
TOTAL HEAD (M)	7.5M	8.5M	10.5M	7M
MAX. SOLIDS (MM)	15MM	25MM	25MM	13MM
IMPELLER	OPEN VANE VORTEX	OPEN VANE VORTEX	OPEN VANE VORTEX	OPEN VANE VORTEX/ PRE- CHOPPER BLADE
MOTOR	250W	450W	750W	1100W
WEIGHT (DRY)	9KG	17KG	21KG	23KG
DIMENSIONS (LxWxH)	200 x 190 x 400MM	270 x 200 x 520MM	270 x 207 x 560MM	275 x 225 x 560MM
MANUFACTURER'S WARRANTY	1 YEAR	1 YEAR	1 YEAR	1 YEAR

CROMTECH SUBMERSIBLE PUDDLE PUMP

When you have those nuisance puddles or flooding on site, and conventional pumps don't drain low enough, the Cromtech Puddle Pump is the answer. This pump will operate on most surfaces down to 1mm, leaving the bare minimum of water.

STANDARD FEATURES

- Adjustable discharge outlet
- Operates on most surfaces
- Drains down to 1mm water level
- Single phase electric motor
- Overload protection
- 10m long power cord
- Vortex impeller

IDEAL FOR

- Rental and hire
- General purpose de-watering
- Construction sites
- Slabs and footings
- Agriculture
- Pools and ponds
- Flooded areas
- Versatile for all industries



	CPP450
OUTLET (MM)	25MM
WATER FLOW (L/MIN)	85L
WATER FLOW (L/HR)	5100L
TOTAL HEAD (M)	10M
MAX. SOLIDS (MM)	0.2MM
IMPELLER	OPEN VANE VORTEX CAN PUMP DOWN TO 1MM WATER LEVEL
MOTOR	450W
WEIGHT (DRY)	12KG
PACKAGE DIMENSIONS (LxWxH)	230 x 230 x 350mm
MANUFACTURER'S WARRANTY	1 YEAR

CROMMELINS FLEXIBLE DRIVE SUBMERSIBLE PUMPS

These 50mm pumps are heavy duty and designed to handle the toughest of jobs. The submersible pump attaches to a drive unit to rapidly remove water containing solids such as in footings, manholes, tanks, drainage, emptying pools, waste transfer and much more.

IDEAL FOR

- Rental and hire
- Manholes
- Drainage

STANDARD FEATURES

- Cast iron or aluminium pump casing
- Wide suction passages to allow debris (up to 25mm) to pass through
- Can allow fluids containing up to 60% solids
- Quick action flexshaft coupling with 3 dog drive
- Includes adaptor for cam lock/discharge hose
- 6m length flexible shaft
- Rope included to lift the pump in/out of holes
- Movable spiral section to prevent kinking
- 1 Year manufacturer's warranty

OPTIONAL EXTRAS

- 3M Extension shaft
- 6M Extension shaft
- Drive units
- Hose kits available



	FP2T	FP2TA
OUTLET (IN)	2" (50MM)	2" (50MM)
WATER FLOW (L/MIN)	933L	933L
WATER FLOW (L/HR)	56,000L	56,000L
TOTAL HEAD (M)	29M	25M
PUMP TYPE	CAST IRON	ALUMINIUM
MAX. SOLIDS (MM)	25MM	25MM
IMPELLER	OPEN VANE VORTEX	OPEN VANE VORTEX
DRIVE TYPE	3 DOG	3 DOG
WEIGHT (DRY)	33KG	32KG
DIMENSIONS PACKAGE (LxWxH)	1000 x 770 x 200MM	1000 x 770 x 200MM

CROMMELINS SKID MOUNTED FIRE FIGHTING UNIT

BUILT TO ORDER

Crommelins Fire Fighting Units are designed to be easily placed onto a 6x4 or 8x5 trailer or Ute tray. There are three models to choose from, and each includes a 6.0hp Crommelins Fire Fight Pump as standard.

STANDARD FEATURES

- Crommelins Fire Fighting Pump [FF150RP]
- 30m, ¾" hose on hose reel
- Adjustable spray nozzle
- Recirculation hose with bypass valve back to tank
- 6m Suction hose with valve for filling from dam.
- Hot dipped galvanized steel skid (square tube)
- Base with lifting points
- 1 Year manufacturer's warranty

IDEAL FOR

- Rental and hire
- General purpose watering
- Construction and Civil Works
- Agriculture

OPTIONAL EXTRAS

- Twin impeller pumps
- Honda powered
- Yanmar diesel powered
- Forklift pockets
- Customisation to suit customer needs



	FS600RP / 600LTFFP	FS800RP / 800LTFFP	FS1000RP / 1000LTFFP
WATER TANK CAPACITY	600L	800L	1000L
SKID MOUNT FEATURES	FITS STANDARD 6X4 TRAILER (LOAD CAPACITY 745KG)	FITS STANDARD 6X4 TRAILER (LOAD CAPACITY 945KG)	FITS STANDARD 8X5 TRAILER (LOAD CAPACITY 1165KG)
WATER FLOW (L/MIN)	360L	360L	360L
WATER FLOW (L/HR)	21,600L	21,600L	21,600L
TOTAL HEAD (M)	60M	60M	60M
MAX. SUCTION (M)	8M	8M	8M
IMPELLER	SINGLE	SINGLE	SINGLE
STARTING SYSTEM	RECOIL START	RECOIL START	RECOIL START
ENGINE MODEL	6HP EX17	6HP EX17	6HP EX17
ENGINE BRAND	ROBIN	ROBIN	ROBIN
FUEL TANK	3.6L	3.6L	3.6L
DECIBELS @ 7M	66db	66db	66db
WEIGHT (DRY)	145KG	145KG	160KG
WEIGHT (WET)	745.G	945KG	1165KG
DIMENSIONS (LxWxH)	1760 x 1180 x 1000MM	1760 x 1180 x 1000MM	1760 x 1500 x 1000MM
MANUFACTURER'S WARRANTY	2 YEARS	2 YEARS	2 YEARS

FLOORING

AMERICAN SANDERS DRUM



The EZ8 drum sander combines professional contractor-type floor sanding results with highly productive, easy-to-use equipment features for the do-it-yourselfer. The drum lowering lever lets you “feather” the drum.

STANDARD FEATURES

- Drum lowering lever allows for feathering
- 1100 watts dual capacitor motor provides power for the most demanding jobs
- The motor is totally enclosed, keeping it dust free and eliminating the need for motor cleaning
- Quick release dust bag that slides on and off with a simple twist and pull
- Dust pipe allows for easy attachment of 1-1/2 or 2 inch (3.8 or 5 cm) vacuum hoses for improved dust containment
- Easy release latch allows the machine to break down into multiple pieces for transportation
- Rugged cast aluminum construction designed for years of service
- Expanding type sanding drum for quick change of sandpaper

IDEAL FOR

- Hire and rental



07060A / EZ8

SANDING WIDTH (IN)	8" (200MM)
SANDING PAD SIZE (IN)	8 x 19" (200 x 480MM)
OUTPUT SPEED (RPM)	1500RPM
MOTOR (W)	1100W
DECIBELS @ 7M	N/A
WEIGHT (DRY)	48KG
DIMENSIONS (LxWxH)	990 x 380 x 810MM
MANUFACTURERS WARRANTY	1 YEAR

AMERICAN SANDERS ORBITAL

The random-orbital sanding action OBS18DC removes the scratch patterns left by drum or rotary sanders, leaving a smooth, flat floor ready for refinishing. At 3,000 orbits per minute, the OBS18DC sands faster than any other orbital sander available. With torque-less operation for enhanced operator comfort, the OBS18DC is perfect for interim “screen and recoat” and fine finish sanding jobs.

STANDARD FEATURES

- Bristle dust skirt to aid in dust containment.
- Independent dust pickup fan for effective dust containment
- Dust pipe allows for easy attachment of 1-1/2 or 2 inch (3.8 or 5 cm) vacuum hoses for improved dust containment
- The totally enclosed, fan cooled motor, eliminates overheating and the need for motor cleaning
- Heavy duty cast aluminum main frame and pad driver plate for added strength

IDEAL FOR

- Hire and rental
- Flooring contractors



	07083B/ OBS18DC
SANDING WIDTH (IN)	18" (457MM)
SANDING PAD SIZE (IN)	18 x 12" (460 x 305MM)
OUTPUT SPEED (RPM)	3000 ORBITS/MIN
MOTOR (W)	750W
DECIBELS @ 1M	74db
WEIGHT (DRY)	57KG
DIMENSIONS (LxWxH)	460 x 510 x 1140MM
MANUFACTURERS WARRANTY	1 YEAR

AMERICAN SANDERS EDGE



The Super 7 is the most efficient wood floor edger in the industry. Designed for both power and durability, it has been the edger of choice for the pro contractor for over 50 years. Equipped with a quick release dust bag and the ability to attach directly to a vacuum, this edger continues to outpace the competition.

STANDARD FEATURES

- Precision-balanced sanding pad produces finer finish.
- Hardened steel pinion with brass drive gear reduces vibration.
- Powerful 1300 watt motor maintains speed under the heaviest cutting conditions.
- Rotating dust pipe swivels 210 degrees to allow access to tight spaces and easily attaches to 1-1/2 inch or 50 mm vacuum hoses for improved dust containment.
- Quick release dust bag that slides on and off with a simple twist and pull.



	07098A / SUPER7R
DISC SIZE DIAMETER (IN)	7" (178MM)
DUST PORT	1.5" (50MM)
OUTPUT SPEED (RPM)	2800RPM
MOTOR (W)	1300W
DECIBELS @ 7M	N/A
WEIGHT (DRY)	14KG
DIMENSIONS (LxWxH)	410 x 280 x 300MM
MANUFACTURERS WARRANTY	1 YEAR

AMERICAN SANDERS ROTARY

The Rotary Sander 16" offer strength, durability and ease of use for those aggressive sanding jobs. The machine features a powerful two-speed 1100W motor and provides smooth operation and aggressive sanding.



STANDARD FEATURES

- Powerful 1100 watt motor provides smooth operation and aggressive sanding.
- Gray non-marking wheels and power cord protect the floor.
- Innovative 'wiper' style switch keeps the motor contacts clean.
- Chrome-plated steel housing, motor cover, and handle tube provide maximum durability.
- Dust port easily attaches to 1-1/2 inch (38mm) or 2-inch(50mm) vacuum hoses for improved dust containment
- The transparent moulded plug has an internal light that serves as a power indicator.
- Grip face pad driver supplied with the machine.

IDEAL FOR

- Building renovation
- DIY
- Hire and rental
- Flooring Contractors



	056381748
SANDING WIDTH (IN)	16" (40.6cm)
PAD SPEED (RPM)	145RPM
MOTOR (W)	1100W
GEAR BOX	TRIPLE PLANETARY
VACUUM PORT	1.5 IN (35MM)
WEIGHT (DRY)	43KG
DIMENSIONS (LxWxH)	990 x 380 x 810MM
MANUFACTURERS WARRANTY	1 YEAR

AMERICAN SANDERS HYDRASAND ATTACHMENT



The HydraSand attachment mounts to any rotary sander and utilises six 5" pads mounted to a thick steel plate. The six sanding pads provide maximum sanding performance and longer runs between abrasive changes. HydraSand is 15% more productive than leading competitive units.

STANDARD FEATURES

- 15% more effective than leading competitive units
- Large air slots allow for premium dust collection
- Isolator/dampener provides superior unit handling
- Backer pads provide smoother sanding, but may be removed to increase aggressiveness
- Strong, six-bolt clutch plate construction transfers torque without the use of plastic gear assemblies.



PAD SIZE	5 INCH
DRIVER CONSTRUCTION	STEEL
WEIGHT	5.4KG
MANUFACTURERS WARRANTY	6 MONTHS

GROUND CARE

GROUNDHOG TRENCHER 18"

This trencher is an easy to use, compact trencher offering controlled digging to exact depth with minimal effort. Suitable for a variety of grounds including sand, lawn, clay and gravel. Its slim design fits through narrow gates and doorways and allows trenching close to walls and fences, perfect for sprinkling systems, irrigation, reticulation and NBN cabling.

IDEAL FOR

- Hire and rental
- NBN Cabling
- Reticulation & plumbing
- Councils and government departments

STANDARD FEATURES

- 'Shark' tooth cutting blades
- Digging chain guard
- Solid roller digging chain for increased life
- Up to 2.5 to 3m (8-10Fft) per minute productivity
- Centrifugal clutch with all metal shoes and drum, needle bearing equipped
- Side deliver auger
- Wide pneumatic tyres with tubes
- Heavy duty steel frame
- Heavy duty lift hook
- Donaldson aircleaner system
- 2 Year manufacturer's warranty



T418RP

OPERATIONAL LENGTH (IN)	18" (460MM)
DIGGING DEPTH (IN)	8", 12" & 18" (203, 305 & 460MM)
DIGGING WIDTH (IN)	3" (75MM)
ENGINE MODEL	6HP EX17
ENGINE BRAND	ROBIN
FUEL TANK	3.6L
DECIBELS @ 7M	66db
WEIGHT (DRY)	110KG
DIMENSIONS (LxWxH)	1600 x 610 x 1200MM
MANUFACTURER'S WARRANTY	2 YEAR

CROMMELINS WOOD CHIPPERS

Crommelins Wood Chippers feature twin reversible chipping blades, and the single adjustable anvil blade easily 'cuts' through tree branches. With options from home to farm and commercial models, these heavy-duty models will suit most chipping needs.

STANDARD FEATURES

- Twin reversible chipper blades and single adjustable anvil blade
- Deep hopper with rubber curtain
- Vibration free operation under load
- Foot mounted emergency stop switch
- Easy remove hopper and discharge chute
- Large wheels for transport on site
- Simple maintenance & belt tensioning
- Heavy duty rotor bearings with grease points
- Heavy duty 3mm steel plate construction
- Removable front handle
- 2 Year manufacturer's warranty

IDEAL FOR

- Hire and rental
- Contractors
- Councils
- Government departments and parks & gardens

OPTIONAL EXTRAS

- Electric start with AGM battery (GTS13 models)
- Lifting points
- Honda powered



	GTS600RP	GTS600HP	GTS1300HP	GTS1300RP	GTS1310RP (HIRE MODEL)
GREEN WOOD DIAMETER (MM)	50MM	50MM	100MM	100MM	100MM
CHIPPER BLADE WIDTH (MM)	60MM	60MM	250MM	250MM	250MM
EXTRA FEATURES	FOOT MOUNTED E/STOP, EXTRA LONG FEED CHUTE	FOOT MOUNTED E/STOP, EXTRA LONG FEED CHUTE	FOOT MOUNTED E/STOP	FOOT MOUNTED E/STOP	FOOT MOUNTED E/STOP, PANIC BAR, LOCKABLE RECOIL START, AUTO SHUT-OFF ON HOPPER & CHUTE, LIFTING HOOKS
INPUT HOPPER SIZE (MM)	250 x 250MM	250 x 250MM	340 X 470MM	340 x 420MM	340 x 420MM
ENGINE MODEL	7HP EX21	GX200	GX390	14HP EX40	14HP EX40
ENGINE BRAND	ROBIN	HONDA	HONDA	ROBIN	ROBIN
FUEL TANK	3.6L	3.1L	6.1L	7.2L	7.0L
DECIBELS @ 7M	72db	72db	74db	74db	74db
WEIGHT (DRY)	58KG	58KG	165KG	165KG	175KG
DIMENSIONS (LxWxH)	1340 x 470 x 1320MM	1340 x 470 x 1320MM	1500 x 750 x 1520MM	1500 x 750 x 1520MM	1500 x 750 x 1520MM
MANUFACTURER'S WARRANTY	2 YEARS	2 YEARS	2 YEARS	2 YEARS	2 YEARS

GROUNDHOG POST HOLE DIGGERS

Groundhog Post Hole Diggers are ideal for fencing, tree planting and landscaping. Single person and two-person operation models are all designed for operator comfort and ease of use. These tough machines will take the hard work out of digging holes, making jobs easier, quicker and safer.

STANDARD FEATURES

- Genuine Robin or Honda industrial engines
- Ergonomic handlebars with 'dead man' switch providing safe operation
- Reversible blade auger design to double the life
- Made in the USA

IDEAL FOR

- Hire and rental
- Fencing contractors
- Agriculture & farming
- Tree planting
- Landscaping

OPTIONAL EXTRAS

- Display and storage stand
- Augers 2", 4", 6" and 8" (for GHM1H)
- Augers 2" to 12" (Other models)
- Auger extensions (1ft, 2ft, 3ft and 6ft)



	GHM1H	C715RP
AUGER WIDTH (IN)	8" (203MM)	12" (305MM)
OPERATING TYPE	ONE-PERSON	TWO-PERSON
ENGINE MODEL	GX35	6HP EX17
ENGINE BRAND	HONDA	ROBIN
FUEL TANK	0.63L	3.6L
DECIBELS @ 7M	69db	66db
WEIGHT (DRY)	11.5KG	35KG
MANUFACTURER'S WARRANTY	1 YEARS	2 YEARS

CROMMELINS STAR PICKET DRIVERS

Fencing has never been made easier with Crommelins Picket/Post Drivers. These machines will efficiently hammer star pickets and posts into the ground. Built to be lightweight, they have versatile sleeves to allow for use with different sized star (Y) pickets, steel posts and timber stakes.

STANDARD FEATURES

- Genuine Honda industrial engine
- 4-Stroke, petrol powered
- Lightweight for its size
- Anti-vibration handles
- Large impact force provides efficient driving
- Compact and easily transportable

IDEAL FOR

- Hire and rental
- Fencing
- Agriculture & farming
- Landscaping
- Sign companies

OPTIONAL EXTRAS

- Picket/Post reducer sleeves
- Cradle (PDCRADLE) 5KG
- Case (PDCASE)
- Multifunction handle kit
- Extension handle kit
- Case
- "3/4, 1 1/2" collar reducer
- "2, 2 1/4" collar reducer



	SPX52HP	SPX82HP
PICKET/POST CAPACITY (IN)	2" (50.8MM)	3 ¼" (82MM)
IMPACT BLOW	1720/MIN	1720/MIN
ENGINE MODEL	GX35	GX35
ENGINE BRAND	HONDA	HONDA
FUEL TANK	0.63L	0.63L
DECIBELS @ 7M	69db	69db
WEIGHT (DRY)	16KG	19.5KG
DIMENSIONS (LxWxH)	590 x 340 x 200MM	590 x 340 x 200MM
MANUFACTURER'S WARRANTY	1 YEARS	1 YEARS

DETHATCHERS

This machine is for removing years of build up of dead thatch in lawns. Using flail blades, the machine strips the thatch, which is then raked up. This then promotes healthy regrowth and improved water absorption.

IDEAL FOR

- Hire and rental
- Contractors
- Councils
- Government departments

PR18 STANDARD FEATURES

- Flail Blade (for removing matted thatch).
- Ergonomic handle with padded grips to reduce operator fatigue
- Three-position handle for user comfort
- Folding handle for transport
- Strong steel frame

PR18 OPTIONAL EXTRAS

- Delta blade reel thinning running stem grasses.



	PR18
OPERATIONAL WIDTH (IN)	18" (457MM)
OPERATIONAL HEIGHT (IN)	7X PRESETS 1" TO -1" (AT 1/4" INCREMENTS)
MODEL BRAND	BLUEBIRD
ENGINE MODEL	GX160
ENGINE BRAND	HONDA
FUEL TANK	3.1L
WEIGHT (DRY)	59KG
DIMENSIONS (LxWxH)	1160 x 670 x 990MM
DECIBELS	
MANUFACTURER'S WARRANTY	1 YEAR

SOD AND TURF CUTTERS

Where there is turf to remove, our turf cutters will get the job done. Our turf cutters feature multiple depth settings making them suitable for a variety of terrain and soil conditions. These robust, heavy duty cutters will provide years of low maintenance and outstanding reliability with a high productivity rate. Make turf cutting simple and efficient.

TC16HP STANDARD FEATURES

- 16" Cutting blade
- Belt driven
- Multiple depth adjustable
- Pneumatic drive wheels
- Over centre Clutches
- Slotted holes for bearing housing
- Solid steel construction for strength and durability
- High speed bearings with eccentric locking collars
- Easy, low maintenance

TC16HP OPTIONAL EXTRAS

- Turf Slitting blade
- Trenching blade
- Mole Draining blade



PHOTO SHOWN WITH HONDA

	TC16HP
CUTTING WIDTH (IN)	16" (355MM)
CUTTING DEPTH (IN)	4" (100MM)
MODEL BRAND	INGS
ENGINE MODEL	GX270
ENGINE BRAND	HONDA
FUEL TANK	5.3L
WEIGHT (DRY)	130KG
DIMENSIONS (LxWxH)	1450 x 850 x 500MM
DECIBELS @ 7M	66db
MANUFACTURER'S WARRANTY	1 YEAR

IDEAL FOR

- Hire and rental
- Contractors
- Councils
- Government departments

SC550 STANDARD FEATURES

- Simplified depth setting adjusts up to 2.5" (60mm) depth.
- 5 x Speeds (2 x Cut speeds, 2 x Transport, 1 x Reverse)
- Soft grip rubber handle reduces vibration
- 4WD Operation for extra torque
- Up to 1404m²/hr - low speed productivity
- Up to 1822m²/hr - high speed productivity
- Strong steel frame
- Lightweight aluminum plate arms reduce vibration and feature maintenance-free ball bearings
- 10" semi-pneumatic v-tractor tread wheels



	SC550H
CUTTING WIDTH (IN)	18" (457MM)
CUTTING DEPTH (IN)	2.5" (60MM)
MODEL BRAND	BLUEBIRD
ENGINE MODEL	GX200
ENGINE BRAND	HONDA
FUEL TANK	3.1L
WEIGHT (DRY)	150KG
DIMENSIONS (LxWxH)	1370 x 610 x 910MM
DECIBELS	66db
MANUFACTURER'S WARRANTY	1 YEAR

BLUEBIRD LAWN AERATOR 19"

Greater productivity, better manoeuvrability, and a user-friendly design are just a few of the outstanding features that make the Bluebird aerator a breeze to operate. This self-propelled aerator is used to core holes into compacted lawns, allowing water to feed directly to the root matter, yielding a more productive, healthy lawn.

IDEAL FOR

- Hire and rental
- Contractors
- Councils
- Government departments

STANDARD FEATURES

- 30 x 2cm Coring tines (closed spoon design) hardened for long life
- Genuine HONDA industrial engine
- Rotating tines for easy turning
- Aerating pattern 76-100mm
- Up to 2034m²/hr productivity
- 2 x 16kg removable weights
- Front wheels - 10" semi-pneumatic
- Rear wheels (8" solid rubber)
- Fold down handles for easy transportation and storage



	530
CUTTING WIDTH (IN)	19" (482MM)
CUTTING DEPTH (IN)	3" (75MM)
MODEL BRAND	BLUEBIRD
ENGINE MODEL	GX120
ENGINE BRAND	HONDA
FUEL TANK	2.0L
WEIGHT (DRY)	131KG
DIMENSIONS (LxWxH)	1220 x 736 x 1295MM
MANUFACTURER'S WARRANTY	1 YEAR

WATER-FILLED LAWN ROLLERS

These simple, no fuss rollers are very easy to use. Water rollers provide gardeners and landscapers with a practical tool for establishing and maintaining lawns. They are built to be long lasting, durable and provide protection against the elements.

60L POLY WATER ROLLER FEATURES

- Lightweight (when unfilled)
- 25mm double bung system for quick emptying
- Steel handle and frame
- Galvanised compact resistant PVC roller
- Dimensions package - 650x450x450MM
- UV Stabilised polytuff barrel



	60PLR
OPERATIONAL WIDTH (IN)	24" (600MM)
WEIGHT	5KG (65KG FILLED)
MANUFACTURES WARRANTY	1 YEAR

IDEAL FOR

- Hire and rental
- DIY

GALVANISED SPIKED ROLLER FEATURES

- Galvanised for durability
- Internal galvanizing protects when filled with water.
- 600mm operating width
- 300mm diameter
- 150mm spikes



	SROLL
DIGGING DEPTH (INCHES)	6" (150MM)
OPERATONAL WIDTH (INCHES)	24" (600MM)
MANUFACTURES WARRANTY	1 YEAR

GTM ERGONOMIC HARNESSES ET2

Exclusive to Crommelins, the GTM Ergonomic Harness ET2 is designed to reduce the weight of a hedge trimmer. Simple to set up, it will ease fatigue, ensuring the operator can work more safely, in comfort, with less effort.

STANDARD FEATURES

- Adjustable strapping (for all sizes)
- Suited to petrol powered hand held tools such as hedge trimmers and long-reach hedge cutters
- Tension cable winds in/out to operate at all heights
- Rotates up to 15 degrees for off center operation
- Separates into 2 pieces for storage and transport
- Carry bag included
- Reduces apparent weight to approximately 1.5KG



IDEAL FOR

- Landscaping
- Garden contractors
- Shires and councils
- Parks and gardens
- Golf courses



	ET2
OPERATIONAL ROTATION (°)	UP TO 15°
OPERATIONAL WEIGHT (kg)	EQUIPMENT UP TO 4.5KG
WEIGHT (DRY)	5KG
MANUFACTURER'S WARRANTY	1 YEAR
BRAND	GTM PROFESSIONAL

AIR EQUIPMENT

CROMTECH CARPET DRYERS

This range of industrial carpet dryers is well suited to professional carpet cleaning, flood remediation and rental. All units are low amperage running and have a large air output for quick drying.

STANDARD FEATURES

- Single phase motor
- Impact resistant body with integrated handle
- Protective fan covers
- Low amp draw for economical running
- Long power cable
- Stackable, light weight and compact
- 1 Year cromtech™ warranty

IDEAL FOR

- Rental and hire
- Carpet drying
- Air movement
- Flood remediation
- Professional carpet cleaners

OPTIONAL EXTRAS

- Snout attachment [SNAK] for D22



	AP110002	D22	C22
AIR TYPE	CARPET DRYER	CARPET DRYER	CARPET DRYER
WATTAGE (W)	250W	750W	1000W
AMPS (LOW/MED/HIGH)	1.6AMP	2.2 / 2.2 / 2.3AMP	4 / 4.5 / 5.5AMP
VENT SIZE (IN)	-	-	
AIR DISPLACEMENT (CFM)	850CFM	2455CFM	3800CFM
SPEED (LOW/MED/HIGH)	1600RPM	1200 / 1300 / 1400RPM	1200 / 1300 / 1400RPM
EXTRA FEATURES	COMPACT PROFILE, NO AIR FLOW DEAD SPOT	STACKABLE	STACKABLE
POWER CABLE LENGTH (M)	4.5M	4.5M	4.5M
DECIBELS @ 7M	62db	70db	70db
WEIGHT (DRY)	8.5KG	16KG	16KG
DIMENSIONS (LxWxH)	540 x 430 x 250MM	520 x 450 x 540MM	520 x 450 x 540MM
MANUFACTURER'S WARRANTY	1 YEAR	1 YEAR	1 YEAR

CROMTECH VENTILATORS

Cromtech Ventilators are for applications where ventilation is required for cleaning, fume and dust dispersion and room or confined space ventilation. They are made from heavy duty durable materials.

STANDARD FEATURES

- Light weight, compact design
- Impact resistant body with handle
- Protective fan covers
- Long power cable
- One year cromtech™ warranty

IDEAL FOR

- Hire and rental
- Air movement
- Fume dispersion
- Commercial and trade use

DUCTING AVAILABLE

- 12" Ducting
- Hard wearing flexible woven polyester
- Easily retractable for transport
- 5 metre length



12"

BR125M
340 X 340 X 5000MM



	HT30	AP110012
AIR TYPE	VENTILATOR	VENTILATOR
WATTAGE (W)	500W	750W
VENT SIZE (IN)	12" (300MM)	12" (300MM)
STATIC PRESSURE (PA)	273PA	540PA
AIR FLOW RATE (M³)	65M³	65M³
SPEED (LOW/MED/HIGH)	2800RPM	2900RPM
EXTRA FEATURES	HANDLE	STACKABLE, PLASTIC BODY RESISTS RUST
POWER CABLE LENGTH (M)	2.5M	2.5M
DECIBELS @ 7M	78db	68db
WEIGHT (DRY)	10.5KG	14KG
DIMENSIONS (LxWxH)	300 x 280 x 330MM	520 x 400 x 500MM
MANUFACTURER'S WARRANTY	1 YEAR	1 YEAR

CROMTECH AIR FILTRATION

Designed for indoor air quality restoration, particularly after fire, flood, sewage or mould remediation. This air scrubber has a filtration device fitted with HEPA filters for removing hazardous particles from the air.

CROMTECH AIR SCRUBBER

- Single phase motor
- Variable speed control
- Stackable and compact
- 16" Inlet and 10" lay flat outlet
- 1 Year CROMTECH™ warranty
- **Optional accessory** - Carbon/potassium permanganate filter to absorb odours and

IDEAL FOR

- Professional carpet cleaners
- Concrete cutting
- Chemical pouring



AS110001

TYPE	AIR SCRUBBER
WATTAGE (W)	250W
AIR DISPLACEMENT (CFM)	500CFM
SPEED (HIGH)	2400RPM
POWER CABLE LENGTH (M)	4.5M
EXTRA FEATURES	16" INLET & 10" LAY FLAT OUTLET
WEIGHT (DRY)	16KG
DIMENSIONS (LxWxH)	570 x 360 x 655MM
MANUFACTURER'S WARRANTY	1 YEAR

GENERAL TRADE

CROMMELINS TROLLEYS

The Crommelins range of compactor, fridge trolley as well as the panel lifter caddy will make the task of moving equipment easier, quicker and safer.

STANDARD FEATURES

- Powder coated HD steel frame
- One year manufacturer's warranty

COMPACTOR TROLLEY

- Handle clip prevents compactor from slipping off trolley
- 2x Heavy duty rubber wheel
- Suits CC70 and CC90 models

STAIR CLIMBING TROLLEY

- Adjustable strap to hold fridge/object to trolley
- Dual protective strips prevents damage to object
- Heavy duty rubber on tri-shaped axis for climbing stairs

PANEL LIFT CADDY

- Lifting hook/bar
- Keeps all panel lift components in one easy to move and transport caddy
- Chain and hook to hold pieces in place
- Heavy duty solid rubber wheels



	CWKTR	FTSCS	PLCADDY
CAPACITY MAX. (KG)	150KG	300KG	PANEL LIFT (45KG)
WHEELS TYPE	SOLID RUBBER	6X SOLID WHEELS	SOLID RUBBER
SUITS	CC70H, CC70RP, CC70YD, CC90RP, CC90H COMPACTORS	FRIDGES AND BULKY ITEMS	PANEL LIFT [PLIFT]
WEIGHT (DRY)	15KG	25KG	15KG (60KG WITH PLIFT)
DIMENSIONS (LxWxH)	400 x 500 x 1305MM	460 x 610 x 1520MM	410 x 600 x 1114MM
MANUFACTURER'S WARRANTY	1 YEAR	1 YEAR	1 YEAR

PANEL LIFT

The popular dry wall panel lifter enables one person to work alone installing panels to ceilings or vertical walls. This model is designed to fold up and fit in the boot of a car for easy transportation and is perfectly suited for the hire industry and contractors.

STANDARD FEATURES

- Reaches to 3.4m (11 feet)
- Easy one-person operation
- No tool assembly
- Folding tripod base
- All welded steel construction
- Foldable tripod legs with 5" (125mm) casters so it fits easily through doorways.
- Fast action single stage winch
- Silent camlock brake

IDEAL FOR

- Hire and rental
- Walls and ceilings
- Drywall plasterers

OPTIONAL EXTRAS

- Trolley [PLCADDY]



	PLIFT
MAX. CAPACITY (KG)	68KG
MAX. HEIGHT (MM)	3350MM
MIN. HEIGHT (MM)	860MM
SHEET SIZE (MM)	1200 X 4800MM
WEIGHT (DRY)	45KG
DIMENSIONS (LxWxH)	1500 x 800 x 400MM
MANUFACTURER'S WARRANTY	1 YEAR

CROMMELINS AIR COMPRESSORS

The Crommelins Machinery Air Compressors are perfect for industrial, commercial, agricultural and residential use. They are available in electric, petrol and diesel, so you will find exactly what you need.

STANDARD FEATURES

- Large volume air tank
- Puncture proof tyres
- Filter regulator
- Cast iron piston pump
- Filter regulator
- Metal belt guard
- One years crommelins warranty

OPTIONAL EXTRAS

- Petrol Robin engine
- Petrol Honda engine
- Diesel Yanmar L48N engine
- Electric start with AGM battery (Yanmar only)
- E-stop (Yanmar only)
- Battery isolator (Yanmar only)

IDEAL FOR

- Air powered tools
- Spray painting
- Stapling / Nailing



	AC10E	AC15RP	AC15HP	AC19YD	AC19YDE
PUMP DISPLACEMENT (L/MIN)	270L	430L	430L	540L	540L
FREE AIR DELIVERY	200L	350L	350L	440L	440L
TANK CAPACITY	60L	60L	60L	75L	75L
MAXIMUM PRESSURE	900KPA [130psi]	1000KPA [145psi]	100KPA [145psi]	1000KPA [145psi]	100KPA [145psi]
PUMP MODEL	PG20	PG31	PG31	PG41	PG41
PUMP CYLINDERS	TWIN	TWIN	TWIN	TRIPPLE	TRIPPLE
POWER SOURCE	ELECTRIC (10 AMP)	PETROL (RECOIL START)	PETROL (RECOIL START)	DIESEL (RECOIL START)	DIESEL (ELECTRIC START)
MOTOR/ENGINE TYPE	1.65KW TECO MOTOR	6.0HP ROBIN EX17	HONDA GX200	4.7 YANMAR L48N	4.7HP YANMAR L48
DECIBELS @ 7M	72db	68db	77db	83db	83DB
WEIGHT (DRY)	85KG	90KG	90KG	119KG	124KG
DIMENSIONS (LxWxH)	1110 x 450 x 770MM	1120 x 450 x 770MM	1120 x 450x 770MM	1130 x 450 x 840MM	1130 x 450 x 840 MM

EARLEX WALLPAPER STEAMER

A professional steam wallpaper stripper that can remove wallpaper, vinyls, painted, multi-layered and even Artex. This unit is the first choice for the painter, decorator, designer, builder, hire and rental professional. It makes light work of a difficult jobs.

STANDARD FEATURES

- 2400W heating element
- 90 minutes of steam time
- Anodised aluminium water tank
- 5m anti-kink cool run hose
- 5m power cable
- Exterior water level indicator
- Built in step takes up to 100KG
- Large lightweight steam plate
- 3 year anti-corrosion guarantee on tank

IDEAL FOR

- Hire and rental
- Builders and decorators
- Wallpaper, vinyls, painted surfaces, multi-layered and even Artex®



	SM5
WATTAGE (W)	2400W
WATER TANK CAPACITY (L)	7.5L
OPERATION HOURS (HR)	UP TO 4HR
WEIGHT (KG)	9.2KG
DIMENSIONS (LxWxH)	470 x 450 x 410MM
MANUFACTURER'S WARRANTY	1 YEAR

ENGINES

ROBIN PETROL ENGINES.

Crommelins Machinery has been the Australian distributor for Robin Engines since 1964. These engines have been the preferred choice of power on a wide variety of equipment to the rental, construction and agricultural industries. Reliability, performance and longevity is the cornerstone of the popular engine.

OPTIONAL EXTRAS

- Electric Start

STANDARD FEATURES

- Larger and extra cooling fins on crankcase, cylinder and mounting base
- Intake and exhaust valves produce low fuel consumption
- Low noise, soft tone quality rigid muffler
- Recoil start with no kickback
- Easy maintenance with fewer parts
- Compatibility to other engine brands allows easy replacements.
- Spark arrestor muffler
- Low oil sensor shutdown
- Dual element air filter
- 3 Year manufacturer's warranty



	EX17	EX21	EX27	EX40
LABELED POWER (HP)	6.0HP	7.0HP	9.0HP	14.0HP
ENGINE BRAND	ROBIN	ROBIN	ROBIN	ROBIN
BORE X STROKE (MM)	67 X 48MM	67 X 60MM	75 X 60MM	89 X 65MM
PISTON DISPLACEMENT (CC)	169CC	211CC	265CC	404CC
MAX. OUTPUT (KW / HP / RPM)	4.2 / 5.7 / 4000	5.1 / 7.0 / 4000	6.6 / 9.0 / 4000	10.3 / 14.0 / 3600
CONT. OUTPUT (KW / HP / RPM)	2.9 / 4.0 / 3600	3.7 / 5.0 / 3600	5.1 / 7.0 / 3600	7.0 / 9.5 / 3600
MAX. TORQUE (NM / KGF.M / RPM)	11.3 / 1.15 / 2500	13.9 / 1.41 / 2500	18.6 / 1.90 / 2500	27.0 / 2.75 / 2400
SPARK PLUG	NGK BR6HS	NGK BR6HS	NGK BR6HS	NGK BR6HS
FUEL TANK	3.6L	3.6L	6.1L	7.0L
STARTING SYSTEM	RECOIL START	RECOIL START	RECOIL START	RECOIL START
DECIBELS @ 7M	66db	68db	70db	72db
WEIGHT (DRY)	15KG	16KG	21KG	33KG
DIMENSIONS (LxWxH)	304x354x335MM	311x366x335MM	351x420x410MM	389x450x443MM
ENGINE MANUFACTURER'S WARRANTY	3 YEARS	3 YEARS	3 YEARS	3 YEARS

FEATURES

Advanced technology and engineering - Based on the Subaru WRX World Rally champion car's boxer engine.

Easy Start - Easy starting with no kickback. 30 to 40% lower recoil pulling force than competitors.

Long warranty - 3 years Robin engine warranty.

Fuel consumption - The intake and exhaust valves are located at optimum angles, and the straight intake port produces minimal airflow resistance resulting in lower fuel consumption.

Engine life - Heavy duty chain driven OHC system with oval type steel links resist stretching, resulting in extended maintenance free operation.

Easy Maintenance - Fewer parts for service. Routine maintenance, assembly and disassembly can be performed with ordinary tools.

Compatibility - Application compatibility with existing slant cylinder engines can be easily replaced with EX engines.

Performance - Pent roof combustion chamber produces more horsepower & torque from less displacement.

Heat reduction - Larger and extra cooling fins on crankcase, cylinder and mounting base results in heat reduction and outstanding oil delivery system.

Low noise - Soft tone quality, new rigid muffler and OHC system reduces noise by 2dBA.



WARRANTY



3 YEAR ROBIN ENGINE WARRANTY

Robin Industrial Engines and Robin Imported Products (Pumps, Generators) come with a 3 year manufacturer's warranty.



2 YEAR MANUFACTURER'S WARRANTY

crommelins™ brand products powered by a Robin Industrial Engine come with a 2 year manufacturer's warranty.



1 YEAR MANUFACTURER'S WARRANTY

All other products including crommelins™, cromtech™, flexible drive products (ie FP2T), high pressure pumps and imported products come with a 1 year manufacturer's warranty.



OTHER BRANDS WARRANTY

Other branded products come with warranties provided by their manufacturer, ie. Gölz, American Sanders, AR Blue Clean.

**AWARD WINNING
SERVICE &
BACKUP**

WARRANTY EXPLAINED

Crommelins Machinery warrants their goods against defects in materials and workmanship under normal use and service.

The Crommelins Machinery warranty does not cover fair wear commensurate with the age of the product, any damage caused by accident, abuse, misuse, neglect or failure to observe proper operating instructions or proper machinery maintenance as described in the instruction manual.

It is the owners' responsibility to regularly maintain a product in accordance with the owners manual and only use the equipment for its designed purpose.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

CONSUMER ADVICE

Any claim under these warranties must be made within the warranty period from the date of purchase of the product.

To make a claim under the warranty, you must return the product (with proof of purchase) to the closest warranty agent or to the place of purchase.

Where a failure does not amount to a major failure, Crommelins Machinery is entitled to choose between providing you with a repair, replacement or refund. To obtain compensation, you would need to provide documentary evidence of the loss or damage suffered, and documentary evidence that such loss or damage was a reasonably foreseeable consequence of a failure by Crommelins Machinery to comply with a consumer guarantee under the Australian Consumer Law.

crommelins™, cromtech™, cromtech outback™, crommelins finance E™, dolphin™ is registered trademarks of Crommelins Operations Pty Ltd, trading as The Crommelin Group.

SERVICE AGENTS

There are over 185 national authorised service/repair agents available, visit www.crommelins.com.au for their details and locations. For engine brands other than Robin please contact the manufacturer for service agents.

CROMMELINS PRODUCTS

Crommelins takes pride in all products they sell and they live by their company Mission Statement; "To be the supplier of choice to Hire and Construction Industry by providing high quality portable powered products."

THE CROMMELIN GROUP

ABN 11 008 889 656

PO Box 352, BENTLEY WA 6982

PH (08) 9350 5588

FAX (08) 9451 6381

E email@crommelins.com.au





