

↗ DOMETIC COOKING RANGE HOODS

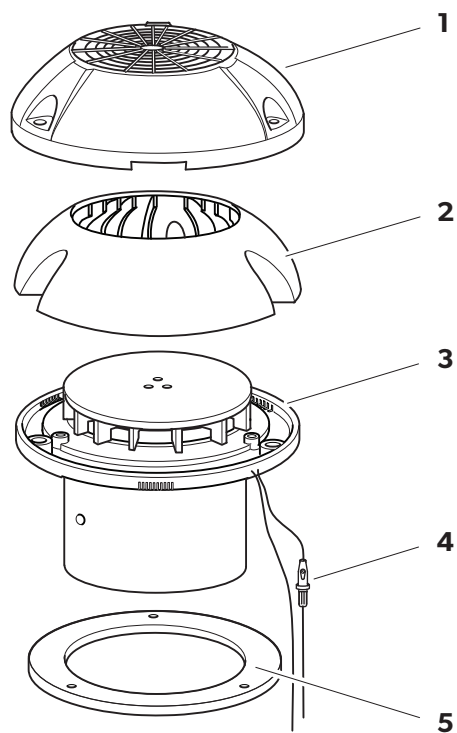



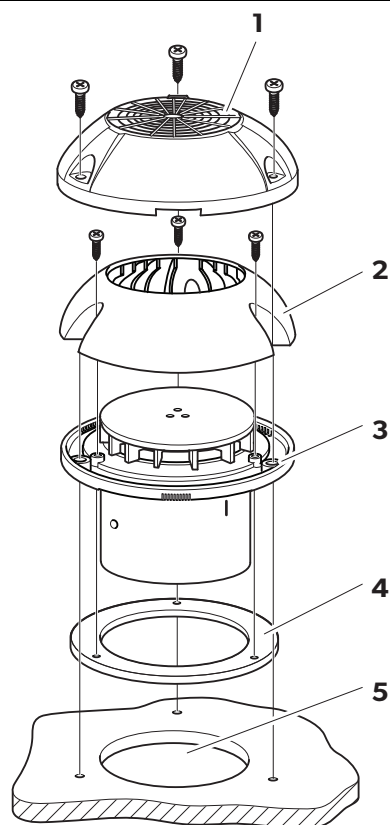
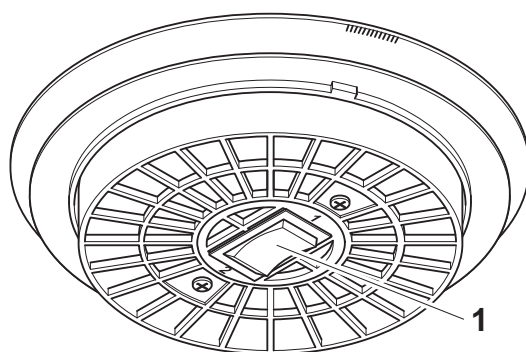
GY11

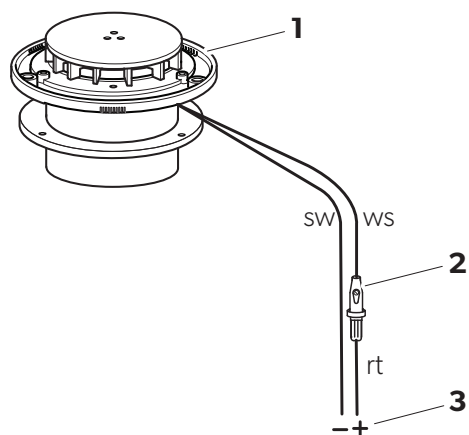
EN

Roof vent with motor

Installation and Operating Manual 5

1**2**

3**4**

5

Please read this instruction manual carefully before installation and first use, and store it in a safe place. If you pass on the product to another person, hand over this instruction manual along with it.

Contents

1	Explanation of symbols	6
2	Safety instructions	6
3	Scope of delivery	8
4	Intended use	8
5	Technical description	8
6	Mounting the roof vent	9
7	Using the roof vent	10
8	Cleaning	10
9	Disposal	11
10	Warranty	11
11	Technical data	11

1 Explanation of symbols

**WARNING!**

Safety instruction: Failure to observe this instruction can cause fatal or serious injury.

**CAUTION!**

Safety instruction: Failure to observe this instruction can lead to injury.

**NOTICE!**

Failure to observe this instruction can cause material damage and impair the function of the product.

**NOTE**

Supplementary information for operating the product.

2 Safety instructions

Please observe the prescribed safety instructions and stipulations from the vehicle manufacturer and service workshops.

The manufacturer accepts no liability for damage in the following cases:

- Faulty assembly or connection
- Damage to the product resulting from mechanical influences and excess voltage
- Alterations to the product without express permission from the manufacturer
- Use for purposes other than those described in the operating manual

Note the following basic safety information when using electrical devices to protect against:

- Electric shock
- Fire hazards
- Injury

2.1 Handling the device



WARNING!

- Installation and repair of the roof vent may only be carried out by qualified personnel who are familiar with the risks involved and the relevant regulations.
- Inadequate repairs may cause serious hazards. For repair service, please contact the service centre in your country (addresses on the back page).
- People (including children) whose physical, sensory or mental capacities or whose lack of experience or knowledge prevent them from using this product safely should not use it without the supervision or instruction of a responsible person.
- When cutting or drilling into walls or ceilings, make sure that no electrical cables or hidden devices are damaged.
- The distance between the gas hob flame and the roof vent must be at least 50 cm.
- Never flambé food under the roof vent.



CAUTION!

- The roof vent must be installed securely so that it cannot fall down.
- Only operate the roof vent if you are certain that the housing and the cables are not damaged.
- Make sure no combustible objects are stored or installed near the air outlet. A distance of at least 50 cm must be maintained.
- Do not reach into the air outlet or insert any foreign objects into the device.

3 Scope of delivery

No. in fig. 1 , page 3	Quantity	Description
1	1	Cover cap
2	1	Roof hood
3	1	Vent
4	1	Connection cable with fuse
5	1	Rubber seal

4 Intended use

The roof vent with motor GY11 is designed for installation in caravans, motorhomes and boats.

5 Technical description

The roof vent with motor GY11 is for ventilating the interiors of caravans, motorhomes and boats. It can also be used in toilets, kitchens, above gas and paraffin lamps and in shower rooms. The cover cap is weatherproof.

The vent is motorised. The blades of the vent wheel are directed towards the side. They therefore do not obstruct the air flow when the vent is off.

The vent is controlled by a switch with three settings (fig. **4** 1, page 5):

- Setting 1: Fan speed 1, half power (max. 65 m³/h)
- Intermediate setting: Fan switched off
- Setting 2: Fan speed 2, maximum power (max. 105 m³/h)

6 Mounting the roof vent

Note on installation location

- The vent should be mounted on the roof on a level surface. When mounted on a sloping surface, the roof hood must be rotated so that one of the three water drainage holes is directed toward the incline. A tilt angle up to 20° will not affect the performance of the vent when the motor is not running.
- The vent removes air from the interior. Make sure there is an adequate air supply! The air intake opening must be at least 60 cm².

Mounting the vent

- Select an appropriate installation location for the vent on the roof.
- Provide an opening for a three-step switch (not included in scope of delivery), for example at the kitchen unit.
- Draw the location and size of the opening of 105 mm diameter for the vent (fig. **2**, page 3) and for the opening of the switch.
- Pre-drill and cut out the holes on the roof carefully with a keyhole saw or similar tool.
- Place the vent (fig. **3** 3, page 4) on the opening (fig. **3** 5, page 4) and mark the six screw holes.
- Apply a thin ring of a permanently elastic sealing material around each hole.
- Put the rubber seal (fig. **3** 4, page 4) into the groove on the underside of the vent.
- Attach the vent (fig. **3** 3, page 4) with six bolts (4,2 x 25).



NOTE

Pull the vent on tightly enough that the rubber seal is seamlessly in contact with the roof.

- Attach the roof hood (fig. **3** 2, page 4) with three bolts (3,5 x 9,5).
- Attach the cover cap (fig. **3** 1, page 4) with three bolts (4,2 x 13).
- Attach the switch next to the stove.

6.1 Connecting the roof vent electrically

- Connect the vent to the battery; see fig. **5**, page 5.

Key

No. in fig. 5 , page 5	Description
1	Vent
2	Fuse holder with fuse T4 A 5 x 20 mm
3	Battery
sw	Black
ws	White
rt	Red

7 Using the roof vent

Switching the vent on and off

- Turn the vent on and off with the switch (fig. **4** 1, page 5).

You can choose between two speeds:

- Setting 1: Fan speed 1 (half power)
- Setting 2: Fan speed 2 (maximum power)

8 Cleaning



NOTICE!

Do not use sharp or hard objects or cleaning agents for cleaning as these may damage the product.

- Occasionally clean the product with a damp cloth.

9 Disposal

- Place the packaging material in the appropriate recycling waste bins wherever possible.



If you wish to finally dispose of the product, ask your local recycling centre or specialist dealer for details about how to do this in accordance with the applicable disposal regulations.


10 Warranty

The statutory warranty period applies. If the product is defective, please contact the manufacturer's branch in your country (see the back of the instruction manual for the addresses) or your retailer.

For repair and guarantee processing, please include the following documents when you send in the device:

- A copy of the receipt with purchasing date
- A reason for the claim or description of the fault

11 Technical data

	GY11		
Reference number:	9107300318 (grey, one part)	9107300307 (white, one part)	9107300308 (white, six parts)
Connection voltage:	12 V $\overline{=}$		
Capacity:	Fan speed 2: max. 105 m ³ /h Fan speed 1: max. 65 m ³ /h Without fan: 3 – 12 m ³ /h (at wind speeds of 1 – 4 m/s)		
Power consumption:	30 W		
Dimensions (WxHxD):	62 x 200 mm		
Weight:	0.6 kg		
Test mark:			

GERMANY

Dometic WAECO International GmbH

Hollefeldstraße 63 · D-48282 Emsdetten

☎ +49 (0) 2572 879-195 · 📠 +49 (0) 2572 879-322

Mail: info@dometic-waeco.de

dometic.com



AUSTRALIA

Dometic Australia Pty. Ltd.

1 John Duncan Court

Varsity Lakes QLD 4227

☎ 1800 212121

☎ +61 7 55076001

Mail: sales@dometic.com.au

AUSTRIA

Dometic Austria GmbH

Neudorferstraße 108

A-2353 Guntramsdorf

☎ +43 2236 908070

☎ +43 2236 90807060

Mail: info@dometic.at

BENELUX

Dometic Branch Office Belgium

Zincstraat 3

B-1500 Halle

☎ +32 2 3598040

☎ +32 2 3598050

Mail: info@dometic.be

BRAZIL

Dometic DO Brasil LTDA

Avenida Paulista 1754, conj. 111

SP 01310-920 Sao Paulo

☎ +55 11 3251 3352

☎ +55 11 3251 3362

Mail: info@dometic.com.br

DENMARK

Dometic Denmark A/S

Nordensvej 15, Taulov

DK-7000 Fredericia

☎ +45 75585966

☎ +45 75586307

Mail: info@dometic.dk

FINLAND

Dometic Finland OY

Mestariintie 4

FIN-01730 Vantaa

☎ +358 20 7413220

☎ +358 9 7593700

Mail: info@dometic.fi

FRANCE

Dometic SAS

ZA du Pré de la Dame Jeanne

B.P. 5

F-60128 Plailly

☎ +33 3 44633525

☎ +33 3 44633518

Mail: vehiculesdeloisirs@dometic.fr

HONG KONG

Dometic Group Asia Pacific

Suites 2207-11 / 22/F - Tower 1

The Gateway - 25 Canton Road,

Tsim Sha Tsui - Kowloon

☎ +852 2 4611386

☎ +852 2 4665553

Mail: info@waeco.com.hk

HUNGARY

Dometic Zrt. Sales Office

Kerekgyártó u. 5.

H-1147 Budapest

☎ +36 1 468 4400

☎ +36 1 468 4401

Mail: budapest@dometic.hu

ITALY

Dometic Italy S.r.l.

Via Virgilio, 3

I-47122 Forlì (FC)

☎ +39 0543 754901

☎ +39 0543 754983

Mail: vendite@dometic.it

JAPAN

Dometic KK

Maekawa-Shibaura, Bldg. 2

2-13-9 Shibaura Minato-ku

Tokyo 108-0023

☎ +81 3 5445 3333

☎ +81 3 5445 3339

Mail: info@dometic.jp

MEXICO

Dometic Mx, S. de R. L. de C. V.

Circuito Médicos No. 6 Local 1

Colonia Ciudad Satélite

CP 53100 Naucalpan de Juárez

Estado de México

☎ +52 55 5374 4108

☎ +52 55 5393 4683

Mail: info@dometic.com.mx

NETHERLANDS

Dometic Benelux B.V.

Ecustraet 3

NL-4879 NP Etten-Leur

☎ +31 76 5029000

☎ +31 76 5029019

Mail: info@dometic.nl

NEW ZEALAND

Dometic New Zealand Ltd.

PO Box 12011

Penrose

Auckland 1642

☎ +64 9 622 1490

☎ +64 9 622 1573

Mail: customerservices@dometic.co.nz

NORWAY

Dometic Norway AS

Østerøyveien 46

N-3232 Sandefjord

☎ +47 33428450

☎ +47 33428459

Mail: firmapost@dometic.no

POLAND

Dometic Poland Sp. z o.o.

Ul. Puławska 435A

PL-02-801 Warszawa

☎ +48 22 414 3200

☎ +48 22 414 3201

Mail: info@dometic.pl

PORTUGAL

Dometic Spain, S.L.

Branch Office em Portugal

Rot. de São Gonçalo nº 1 – Esc. 12

2775-399 Carcavelos

☎ +351 219 244 173

☎ +351 219 243 206

Mail: info@dometic.pt

RUSSIA

Dometic RUS LLC

Komsomolskaya square 6-1

RU-107140 Moscow

☎ +7 495 780 79 39

☎ +7 495 916 56 53

Mail: info@dometic.ru

SINGAPORE

Dometic Pte Ltd

18 Boon Lay Way 06-140 Trade Hub 21

Singapore 609966

☎ +65 6795 3177

☎ +65 6862 6620

Mail: dometic@dometic.com.sg

SLOVAKIA

Dometic Slovakia s.r.o. Sales Office Bratislava

Nádražná 34/A

900 28 Ivanka pri Dunaji

☎/☎ +421 2 45 529 680

Mail: bratislava@dometic.com

SOUTH AFRICA

Dometic (Pty) Ltd.

Regional Office

South Africa & Sub-Saharan Africa

2 Avalon Road

West Lake View Ext 11

Modderfontein 1645

Johannesburg

☎ +27 11 4504978

☎ +27 11 4504976

Mail: info@dometic.co.za

SPAIN

Dometic Spain S.L.

Avda. Sierra del Guadarrama, 16

E-28691 Villanueva de la Cañada

Madrid

☎ +34 91 833 60 89

☎ +34 900 100 245

Mail: info@dometic.es

SWEDEN

Dometic Scandinavia AB

Gustaf Melins gata 7

S-42131 Västra Frölunda

☎ +46 31 7341100

☎ +46 31 7341101

Mail: info@dometicgroup.se

SWITZERLAND

Dometic Switzerland AG

Riedackerstrasse 7a

CH-8153 Rümlang

☎ +41 44 8187171

☎ +41 44 8187191

Mail: info@dometic.ch

UNITED ARAB EMIRATES

Dometic Middle East FZCO

P. O. Box 17860

S-D 6, Jebel Ali Freezone

Dubai

☎ +971 4 883 3858

☎ +971 4 883 3868

Mail: info@dometic.ae

UNITED KINGDOM

Dometic UK Ltd.

Dometic House, The Brewery

Blandford St. Mary

Dorset DT11 9LS

☎ +44 344 626 0133

☎ +44 344 626 0143

Mail: customerservices@dometic.co.uk

USA

Dometic RV Division

1120 North Main Street

Elkhart, IN 46515

☎ +1 574-264-2131