

# RNG-100DB-H

## 100W Flexible Monocrystalline Solar Panel

#### **Key Features**

The Renogy 100 Watt 12 Volt Flexible Monocrystalline Solar Panel is the most convenient panel to convert your house from an energy dependant home to an energy producing location.

- Extreme flexibility
- Ultralight and extremely durable design
- Quick and inexpensive mounting
- Ultra thin lamination
- No hot spots guaranteed

#### **Potential Uses**

The Renogy 100 Watt Flexible Monocrystalline Panel can be primarily used on off-grid applications that include rooftop, RV, boats and any curvy surfaces.



**Power Output Warranty** 



Material and Workmanship Warranty

# RNG-100DB-H

# 100W Flexible Monocrystalline Solar Panel

#### **Electrical Data**

Maximum Power at STC*	100 W
Optimum Operating Voltage (V <sub>mp</sub> )	18.9 V
Optimum Operating Current (I <sub>mp</sub> )	5.29 A
Open Circuit Voltage (V <sub>oc</sub> )	22.5V
Short Circuit Current (I <sub>sc</sub> )	5.75 A
Module Efficiency	15.43%
Maximum System Voltage	600 VDC
Maximum Series Fuse Rating	15 A

### **Thermal Characteristics**

Operating Module Temperature	-40°C to +85°C
Nominal Operating Cell Temerature (NOCT	7) 45±2°C
Temperature Coefficient of Pmax	-0.42%/°C
Temperature Coefficient of Voc	-0.31%/°C
Temperature Coefficient of Isc	0.05%/°C

## Junction Box

IP Rating		IP 68
Number of Diod	les	2 Diode(s)
<b>Output Cables</b>	12 AWG (Negative length	: 450mm, 17.7 in.)
	Positive length	: 150mm, 5.9 in.)

#### **Mechanical Data**

	2 0.10.
Solar Cell Type	Monocrystalline (5 x 5 in)
Number of Cells	36 (4 x 9)
Dimensions	47.9 x 21.0x 0.08 in (1216 x 533 x 2 mm)
Weight	4 lbs (1.8 kg)
Application Class	Class A
Frame	None
Connectors	MC4 Connectors
Fire Rating	Class C

#### MC4 Connectors

Rated Current	30A
Maximum Voltage	1000VDC
Maximum AWG Size Range	10 AWG
Temperature Range	-40°F to 194°F
IP Rating	IP 67


#### Certifications








### **Module Diagram**



#### **IV-Curve**

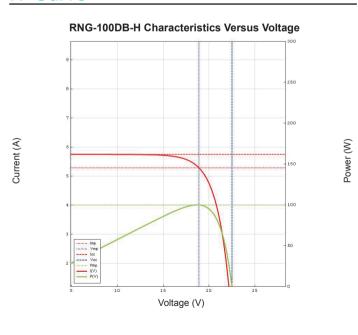

\*All specifications and data described in this data sheet are tested under Standard Test Conditions (STC - Irradiance: 1000W/m², Temperature: 25°C, Air Mass: 1.5) and may deviate marginally from actual values. Renogy and any of its affiliates has reserved the right to make any modifications to the information on this data sheet without notice. It is our goal to supply our customers with the most recent information regarding our products. These data sheets can be found in the downloads section of our website, www.renogy.com