0.8 A



# UNIQUE 6 V CHARGING CTEK XC 0.8

The XC 0.8 is the charger that can give your vintage car a new lease of life. The XC 0.8 is a compact fully automatic 4-step charger that charges and maintains 6 V batteries from 1.2–100 Ah. The XC 0.8 is IP65 classified (splash and dust proof) and delivers 0.8 A. It is designed to protect vehicle electronics, is non-sparking, reverse polarity protected, and short-circuit proof. It is delivered with a 5-year warranty.



Fully automatic for optimal charging



FULLY CHARGED BATTERY / MAINTENANCE CHARGING

## TECHNICAL DATA

CHARGING VOLTAGE	7.2 V
CHARGING CURRENT	0.8 A
TYPE OF CHARGER	4 step, fully automatic charging cycle
TYPE OF BATTERY	6 V lead-acid batteries
BATTERY CAPACITY	1.2-100 Ah
INSULATION	IP65 (splash and dust proof)





0.8 4



- Fully automatic charging and maintenance in 4 steps maximizes battery life and performance
- Numerous accessories simplify using the same charger for multiple batteries
- Water-resistant so that the solution could be taken to the problem even if it rains or snows
- Patented desulphation that extends the battery life
- No sparks, short-circuit proof and reverse-polarity protected for untroubled usage
- Automatic detection of end-of-life batteries that eliminates surprises


#### **READY TO USE**




The table shows the estimated time for empty battery to 80 % charge.


BATTERY SIZE (Ah)	TIME TO 80 % CHARGED
2	2 h
8	8 h
20	<b>20</b> h
60	60 h

## **CTEK CHARGING**

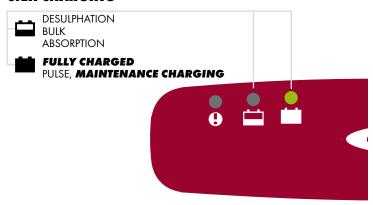

### CONNECT AND CHARGE





### **GUARANTEED QUALITY WITH CTEK**

CTEK customer support is available to answer any questions related to charging and CTEK chargers. Safety, simplicity and flexibility characterizes all products and solutions developed and sold by CTEK. CTEK supply chargers to more than 60 countries throughout the world. CTEK is also a reliable OEM supplier to many of the world's most prestigious car and motorcycle manufacturers.

Contact customer support: info@ctek.com